

**KNOW
YOUR
SETUP**



Renan Decamps
Front End Developper


BearStudio

Task Manager

Tyme

Tyme

Project time tracker

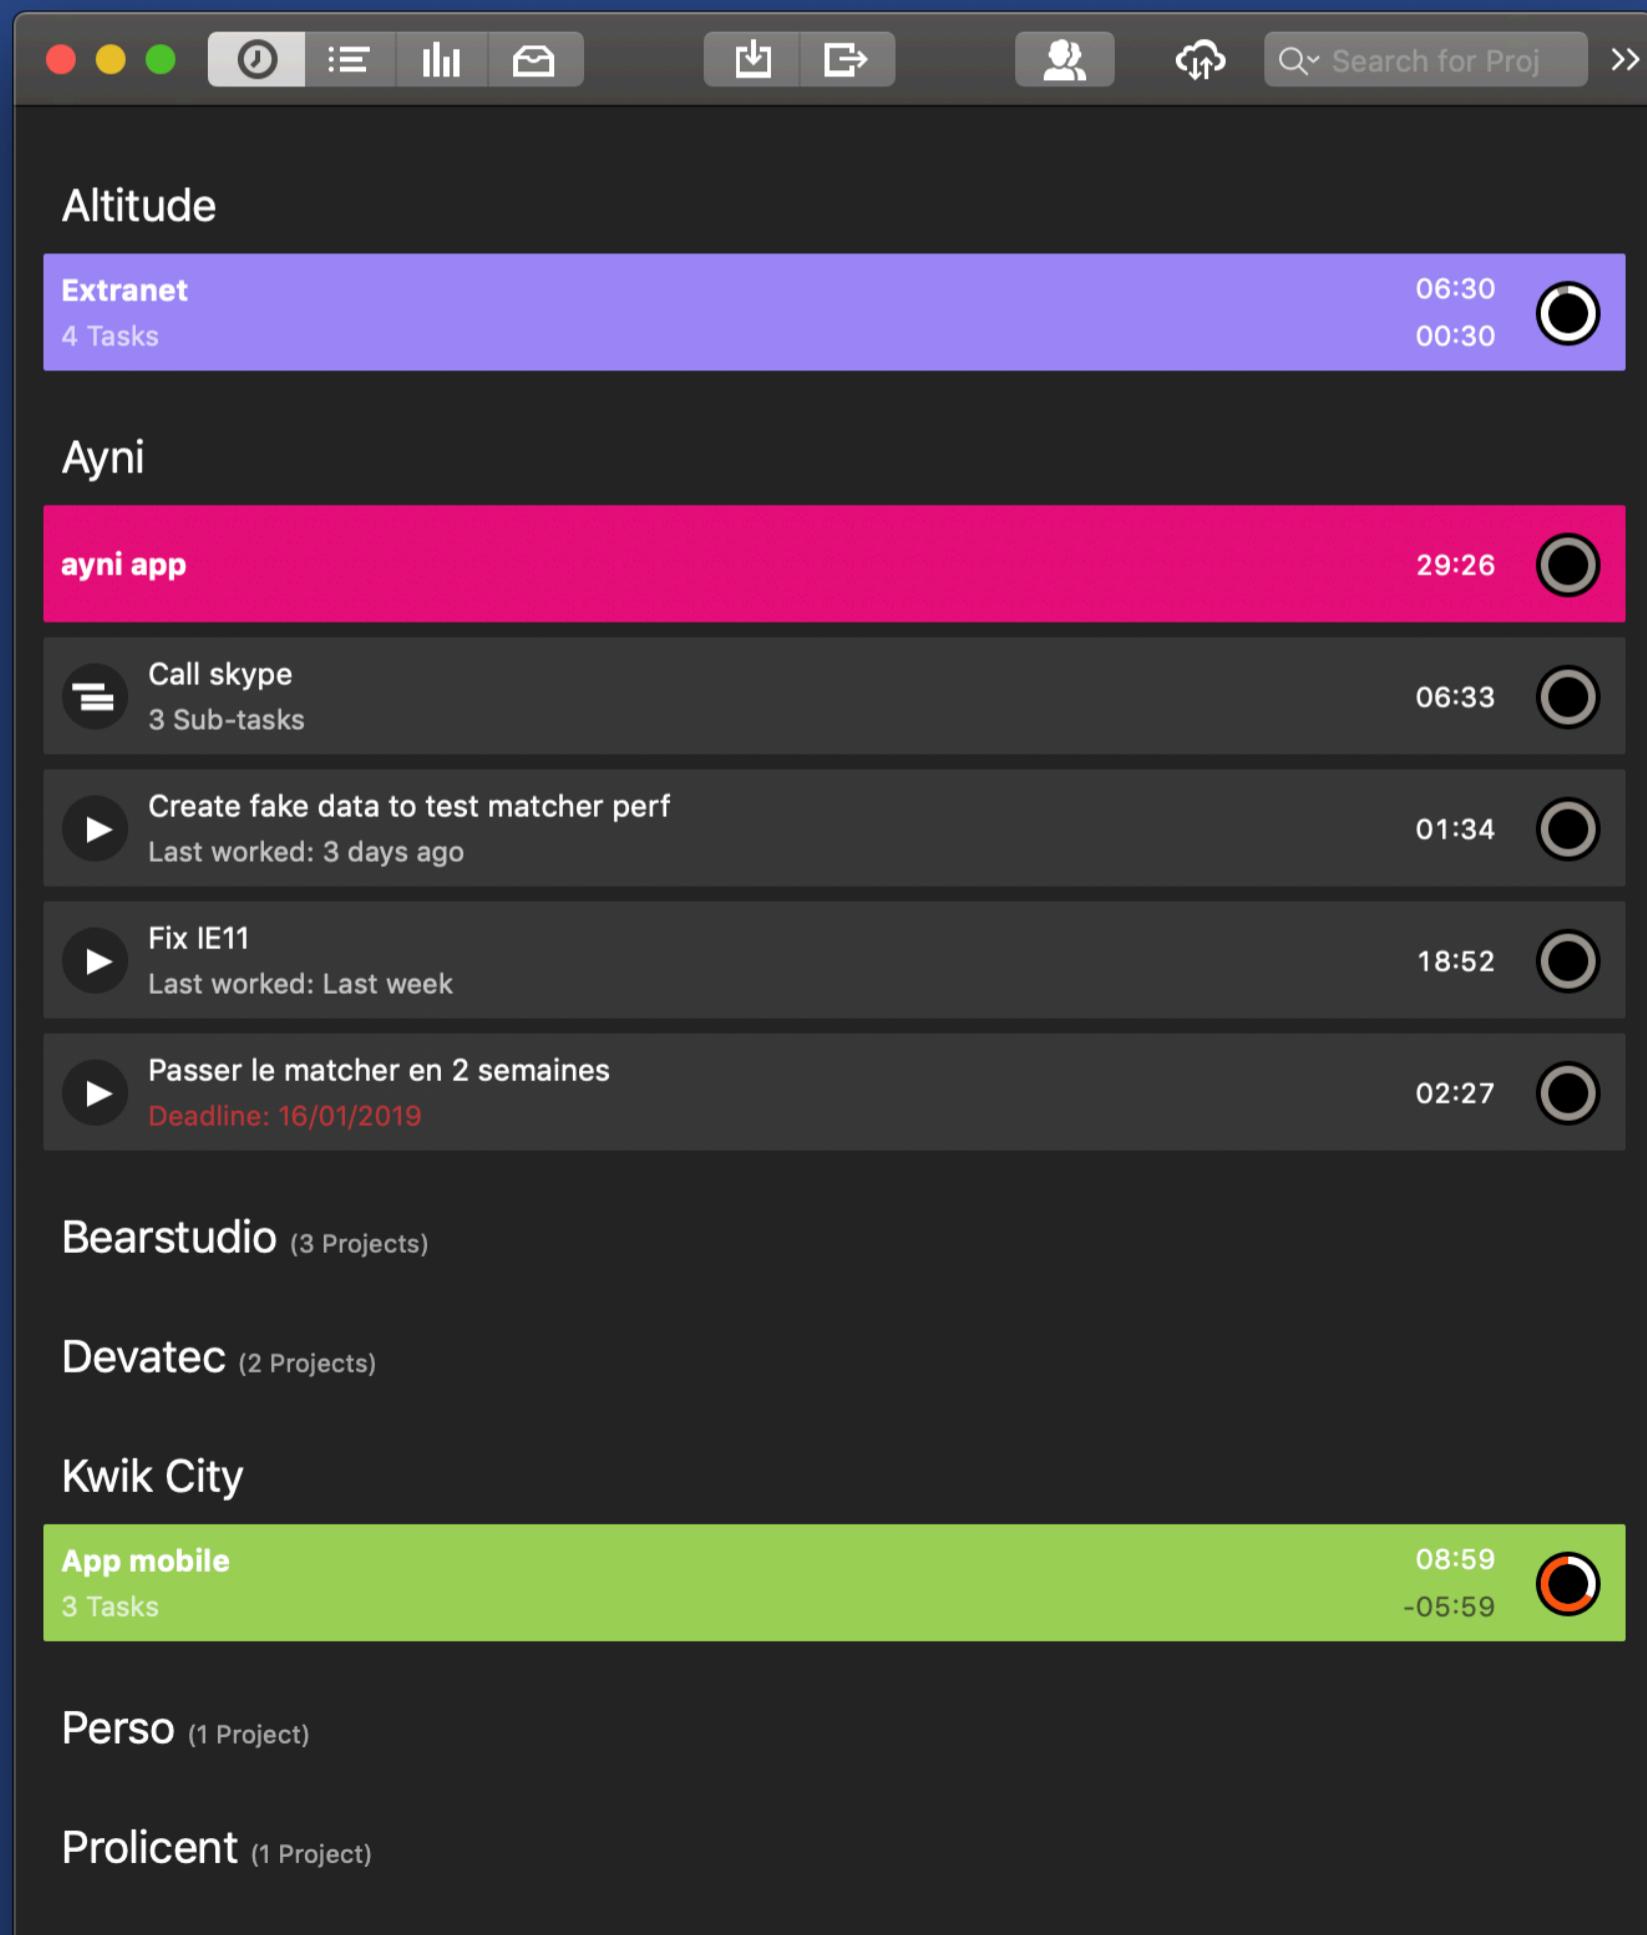

Tyme

Project time tracker


Desktop only

User friendly UI

Get shit done !

Tyme

Project time tracker

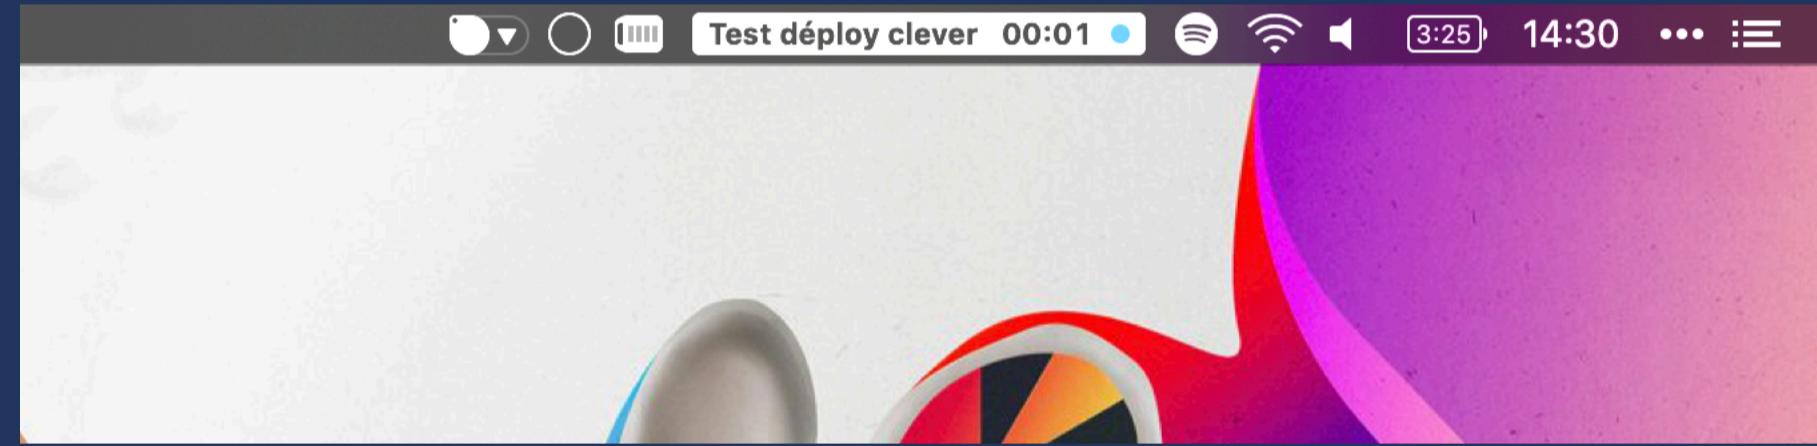

Quick access

TickTick

TickTick

Task manager


The screenshot shows the TickTick task manager interface. On the left, there's a sidebar with navigation links: Today (10 tasks), Next 7 Days (10 tasks), Calendar, Inbox (2 tasks), Personnel, BearStudio (10 tasks), Add List, and Completed. Below these are Lists, Tags, and Custom buttons. The main area is titled "Today" and contains a search bar with placeholder text "Add Task to 'Inbox' on 'Today'". A "Low Priority" section is expanded, showing the following tasks:

- Définir date pour (11h45) réunion confs intéressantes 13:00
- Faire une passe sur la doc de génération iOS & android interne kwik Today
- Builder la nouvelle version de kwik sur iOS kwik Today
- Faire fonctionner Ayni sur IE11 ayni Today
- Faire les tests kwik kwik Today
- Voir testflight (solution de test iOS) bearstudio kwik Today

A note at the bottom right says "Click on the task title to view details". The top right corner features a user profile icon.

TickTick

Task manager

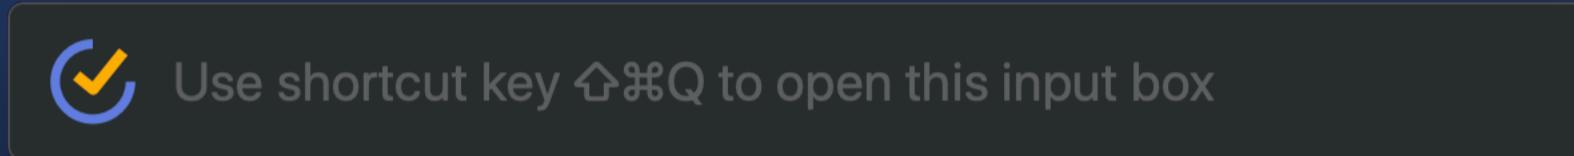

Quick task add

Multi platform

Beautiful and simple to use

Terminal

Hyper

Hyper

Preview



~/Documents/dev/perso/website

```
~/Documents/dev/perso/website master*
> ls -al
total 2248
drwxr-xr-x 19 orangina staff 608 15 jan 09:05 .
drwxr-xr-x 18 orangina staff 576 14 jan 15:49 ..
-rw-r--r-- 1 orangina staff 125 14 jan 16:36 .eslintrc.json
drwxr-xr-x 14 orangina staff 448 15 jan 09:05 .git
-rw-r--r-- 1 orangina staff 973 14 jan 15:49 .gitignore
drwxr-xr-x 14 orangina staff 448 14 jan 16:37 .history
-rw-r--r-- 1 orangina staff 69 14 jan 15:49 .prettierrc
-rw-r--r-- 1 orangina staff 1076 14 jan 15:49 LICENSE
-rw-r--r-- 1 orangina staff 5308 14 jan 15:49 README.md
-rw-r--r-- 1 orangina staff 164 14 jan 15:49 gatsby-browser.js
-rw-r--r-- 1 orangina staff 1077 14 jan 15:49 gatsby-config.js
-rw-r--r-- 1 orangina staff 158 14 jan 15:49 gatsby-node.js
-rw-r--r-- 1 orangina staff 180 14 jan 15:49 gatsby-ssr.js
drwxr-xr-x 1240 orangina staff 39680 14 jan 16:35 node_modules
-rw-r--r-- 1 orangina staff 613961 14 jan 15:58 package-lock.json
-rw-r--r-- 1 orangina staff 1507 14 jan 16:35 package.json
drwxr-xr-x 5 orangina staff 160 14 jan 15:49 src
-rw-r--r-- 1 orangina staff 0 15 jan 09:05 x
-rw-r--r-- 1 orangina staff 490995 14 jan 16:35 yarn.lock
```

~/Documents/dev/perso/website master*

Hyper

Preview

Split view

Hot reload config

Lot's of plugins

The screenshot shows the Hyper terminal application with several features demonstrated:

- Split view:** The main terminal window is split vertically, with the left pane showing the command `ll` output and the right pane showing a blank command line.
- Hot reload config:** A floating window titled "vtop for Orangina" displays system monitoring information, including CPU Usage, Memory Usage, and a dd Kill process window.
- Lot's of plugins:** Another floating window shows a log message indicating a successful bootstrap process, with the status "Compiled".
- Website preview:** At the bottom, there are links to "View GraphQL", "http://localhost:8000", and "Note that the dev server is running".
- Bottom status bar:** The status bar at the bottom shows "i [wdm]: Compiled" twice.

```
~/Documents/dev/perso/website master*
> ll
total 2224
-rw-r--r-- 1 orangina staff 1,1K 14 jan 15:49 LICENSE
-rw-r--r-- 1 orangina staff 5,2K 14 jan 15:49 README.md
-rw-r--r-- 1 orangina staff 164B 14 jan 15:49 gatsby-browser.js
-rw-r--r-- 1 orangina staff 1,1K 14 jan 15:49 gatsby-config.js
-rw-r--r-- 1 orangina staff 158B 14 jan 15:49 gatsby-node.js
-rw-r--r-- 1 orangina staff 180B 14 jan 15:49 gatsby-ssr.js
drwxr-xr-x 1241 orangina staff 39K 15 jan 09:06 node_modules
-rw-r--r-- 1 orangina staff 600K 14 jan 15:58 package-lock.json
-rw-r--r-- 1 orangina staff 1,5K 14 jan 16:35 package.json
drwxr-xr-x 7 orangina staff 224B 15 jan 09:06 public
drwxr-xr-x 5 orangina staff 160B 14 jan 15:49 src
-rw-r--r-- 1 orangina staff 0B 15 jan 09:05 x
-rw-r--r-- 1 orangina staff 479K 14 jan 16:35 yarn.lock

~/Documents/dev/perso/website master*
> 
```

website: yarn start

vtop for Orangina

CPU Usage

Memory Usage

dd Kill process

info bootstrap f

· onPostBootstrap

success onPostBootstrap

DONE Compiled

You can now view

<http://localhost:8000>

View GraphQL, an

<http://localhost:8000>

Note that the dev server is running

To create a produ

i [wdm]:

i [wdm]: Compiled

Hyper

Config

JavaScript config file

Highly customizable



```
// Future versions of Hyper may add additional config options,  
// which will not automatically be merged into this file.  
// See https://hyper.is#cfg for all currently supported options.  
  
module.exports = {  
  config: {  
    // choose either `stable` for receiving highly polished,  
    // or `canary` for less polished but more frequent updates  
    updateChannel: 'stable',  
  
    // default font size in pixels for all tabs  
    fontSize: 16,  
  
    // font family with optional fallbacks  
    fontFamily: 'Monaco, Menlo, "DejaVu Sans Mono", Consolas, "Lucida Console", monospace',
```

Hyper

More

<https://hyper.is/>

<https://github.com/bnb/awesome-hyper>

ZSH

ZSH

Bash with superpowers


Tab completion and arrow navigation

List commands options on tab press

Autocompletion everywhere... 😍

ZSH

Oh My ZSH

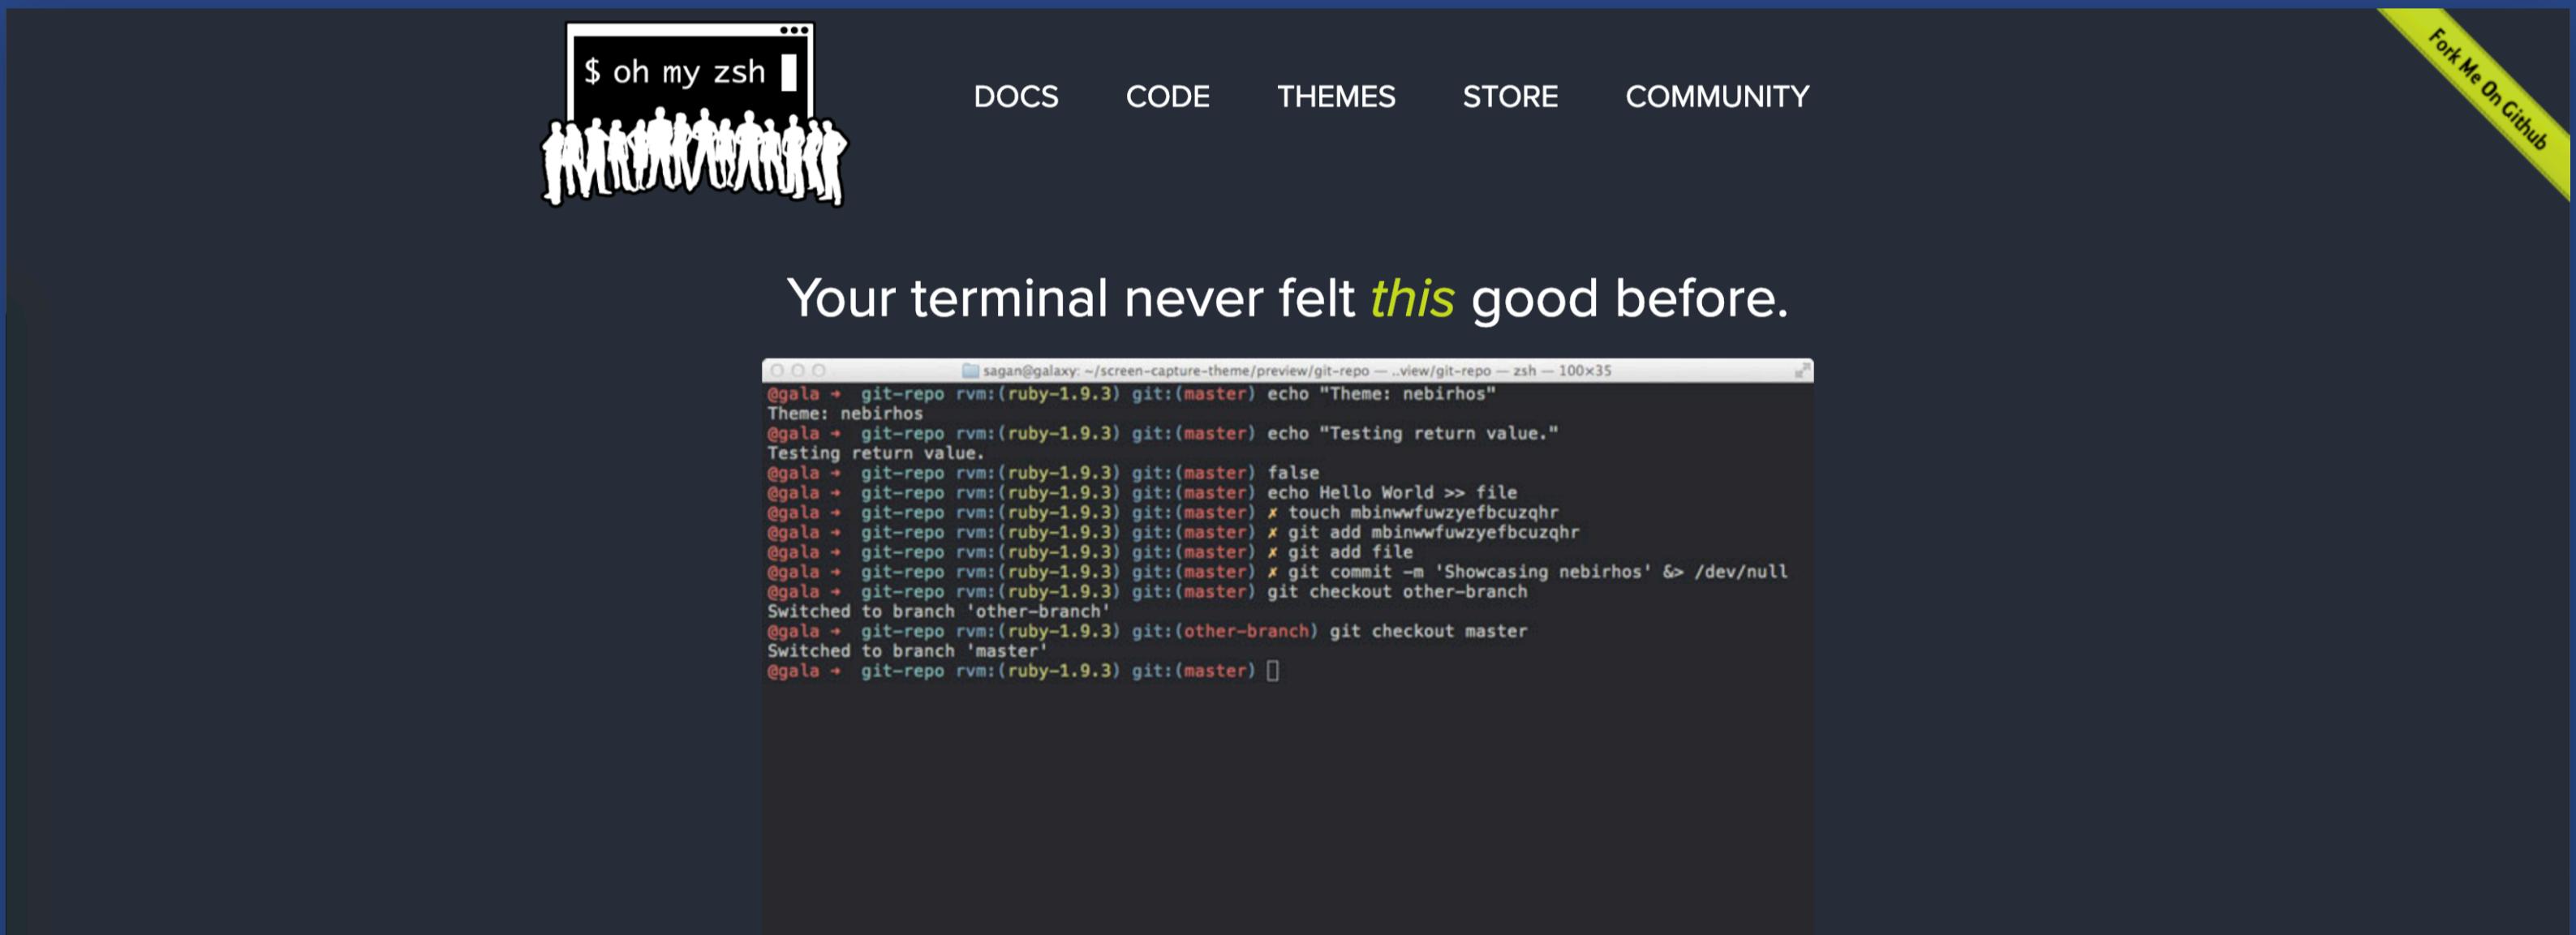

The screenshot shows the official website for Oh My ZSH. At the top, there's a navigation bar with links for DOCS, CODE, THEMES, STORE, and COMMUNITY. To the right of the navigation, a yellow diagonal banner says "Fork Me On Github". The main headline reads "Your terminal never felt *this* good before." Below the headline is a screenshot of a terminal window displaying a series of git commands being run, demonstrating the theme's functionality. The terminal window has a dark background with light-colored text.

Oh My Zsh is a delightful, open source, community-driven framework for managing your Zsh configuration. It comes bundled with a ton of helpful functions, helpers, plugins, themes, and a few things that make you shout...

“Oh My ZSH!”

200+
Plugins

1100+
Contributors

140+
Themes

ZSH

Themes

```
→ .oh-my-zsh git:(master) git co -b LH_2039
Switched to a new branch 'LH_2039'
→ .oh-my-zsh git:(LH_2039) touch x
→ .oh-my-zsh git:(LH_2039) x
```

```
~/git/snippets(master) » ls
31               autocomplete      crf          euler
Compiler          bash            cython        fbChat
LICENSE          buzzni          daemon       fbFreinds
README.md        calendar         daum         fineuploader
aardwolf         captcha          designResearch geeks
algorithm        cgvtube         dirsScanner generator
amazon           clojure          dp           go
angular          codebomb_test   dropbox      golf25
apns              codility         ds           graduation
arduino          coffee           elasticsearch hackerrank
askMyFriend      comcenter       encoding     honey
async            crawler          es           hoot_api

~/git/snippets(master) » rm LICENSE
~/git/snippets(master*) »
```

```
~ ➤ cd testproject
~/testproject ➤ master ➤ gco detached-head-state -q
~/testproject ➤ ↵ fdffaf6 ➤ touch dirty-working-directory
~/testproject ➤ ↵ fdffaf6± ➤ cd
~ ➤ ssh milly
Welcome to Ubuntu 11.04 (GNU/Linux 2.6.18-308.8.2.el5.028stab101.1 x86_64)
Last login: Wed Sep 26 03:42:49 2012 from 71-215-222-90.mpls.qwest.net
agnoster@milly ➤ ~
Connection to milly.agnoster.net closed.
~ ➤ sudo -s
Password:
```

```
(10-05-12 9:28)[ruby-1.8.7]muscato:~ dallas%
(10-05-12 9:28)[ruby-1.8.7]muscato:~ dallas% ~aw
(10-05-12 9:28)[ruby-1.8.7]muscato:~aw@master dallas%
(10-05-12 9:28)[ruby-1.8.7]muscato:~aw@master dallas%
M Capfile
(10-05-12 9:28)[ruby-1.8.7]muscato:~aw@master XXX dallas%
(10-05-12 9:29)[ruby-1.8.7]muscato:~aw@master dallas%
(10-05-12 9:29)[ruby-1.8.6]muscato:~aw@master dallas%
(10-05-12 9:29)[ruby-1.8.7]muscato:~aw@master dallas%
(10-05-12 9:29)[ruby-1.9.1]muscato:~aw@master dallas%
(10-05-12 9:29)[ruby-1.9.1]muscato:~ dallas%
```

```
[robbyrussell@gargamel-2] [/dev/ttys001]
[~]> cd .oh-my-zsh
[robbyrussell@gargamel-2] [/dev/ttys001] [master]
[~/oh-my-zsh]>
```

```
Koji :: Code/daitss/core <master> % _ -s
Koji :: Code/daitss/core <master> #
Koji :: Code/daitss/core <master> % foo
zsh: command not found: foo
Koji :: Code/daitss/core <master> %
Koji :: Code/daitss/core <master> % in vi command mode
```

ZSH

Plugins



~/oh-my-zsh/plugins

```
> ls
adb           copyfile      git-prompt      lighthouse     pylint        terminalapp
ant           cp             git-remote-branch lol            python        terminitor
apache2-macports cpanm        gitfast         macports      rails         terraform
arcanist       debian       github          man           rake          textastic
archlinux      dircycle     gitignore      marked2       rake-fast    textmate
asdf           dirhistory   glassfish      mercurial     rand-quote  thefuck
autoenv        dirpersist   globalias     meteor        rbenv        themes
autojump       django       gnu-utils     minikube     react-native thor
autopep8       dnf           go              mix           rbfu         tig
aws            docker       golang         mix-fast     rebar        tmux
battery        docker-compose gpg-agent     mosh          redis-cli    tmux-cssh
bbedit         docker-machine gradle        mvn          repo         tmuxinator
bgnotify       dotenv       grails         mysql-macports rsync        torrent
boot2docker   droplr      grunt          n98-magerun ruby         tugboat
bower          eecms        gulp           nanoc         rust         ubuntu
branch         emacs        hanami        ng            rvm          urltools
brew           ember-cli    helm           nmap         safe-paste  vagrant
bundler        emoji        heroku        node         sbt          vault
bwana          emoji-clock history        nomad        scala        vi-mode
cabal          emotty       history-substring-search npm          scd          vim-interaction
cake           encode64     httpie        npx           screen      virtualenv
cakephp3       extract      iterm2        nvm           scw          virtualenvwrapper
capistrano     fabric       iwhois        nyan         sffe         vundle
cargo          fancy-ctrl-z jake-node    npm          shrink-path wakeonlan
cask           fasd         jhbuild      npx           singlechar wd
catimg         fastfile    jira          nvm          scw          web-search
celery         fbterm      json-tools  jump          per-directory-history stack
chruby         fedora      jira          jump          perl          sublime
chucknorris   firewalld   jkate         kate          perl          sudo
cloudapp       forklift    kitchen      knife        perms        supervisor
codeclimate    fossil      knife        knife        phing        suse
coffee         frontend-search gas          knife_ssh   knife        pip
colemak        gb          kops          kops          pow          pow
colored-man-pages geeknote   kube-ps1    kubectl     postgres     powder
colorize       gem         kube-ps1    laravel     pow          postgres
command-not-found git         kubectl    laravel4    pow          postgres
common-aliases git-extras  laravel     laravel5    powder      powify
compleat       git-flow    laravel     laravel5    powify      profiles
composer       git-flow-avh last-working-dir lein          pyenv        profiles
copybuffer     git-hubflow
copydir
```

ZSH

Plugins

OSX `tab, ofd, showfiles, hidefiles, pfd...`

VScode `vsc, vscd [file1] [file1]`

wd `wd add [warpName], wd list, wd [warpName]`


z z

Code Editor

Visual Studio Code

Visual Studio Code

Preview

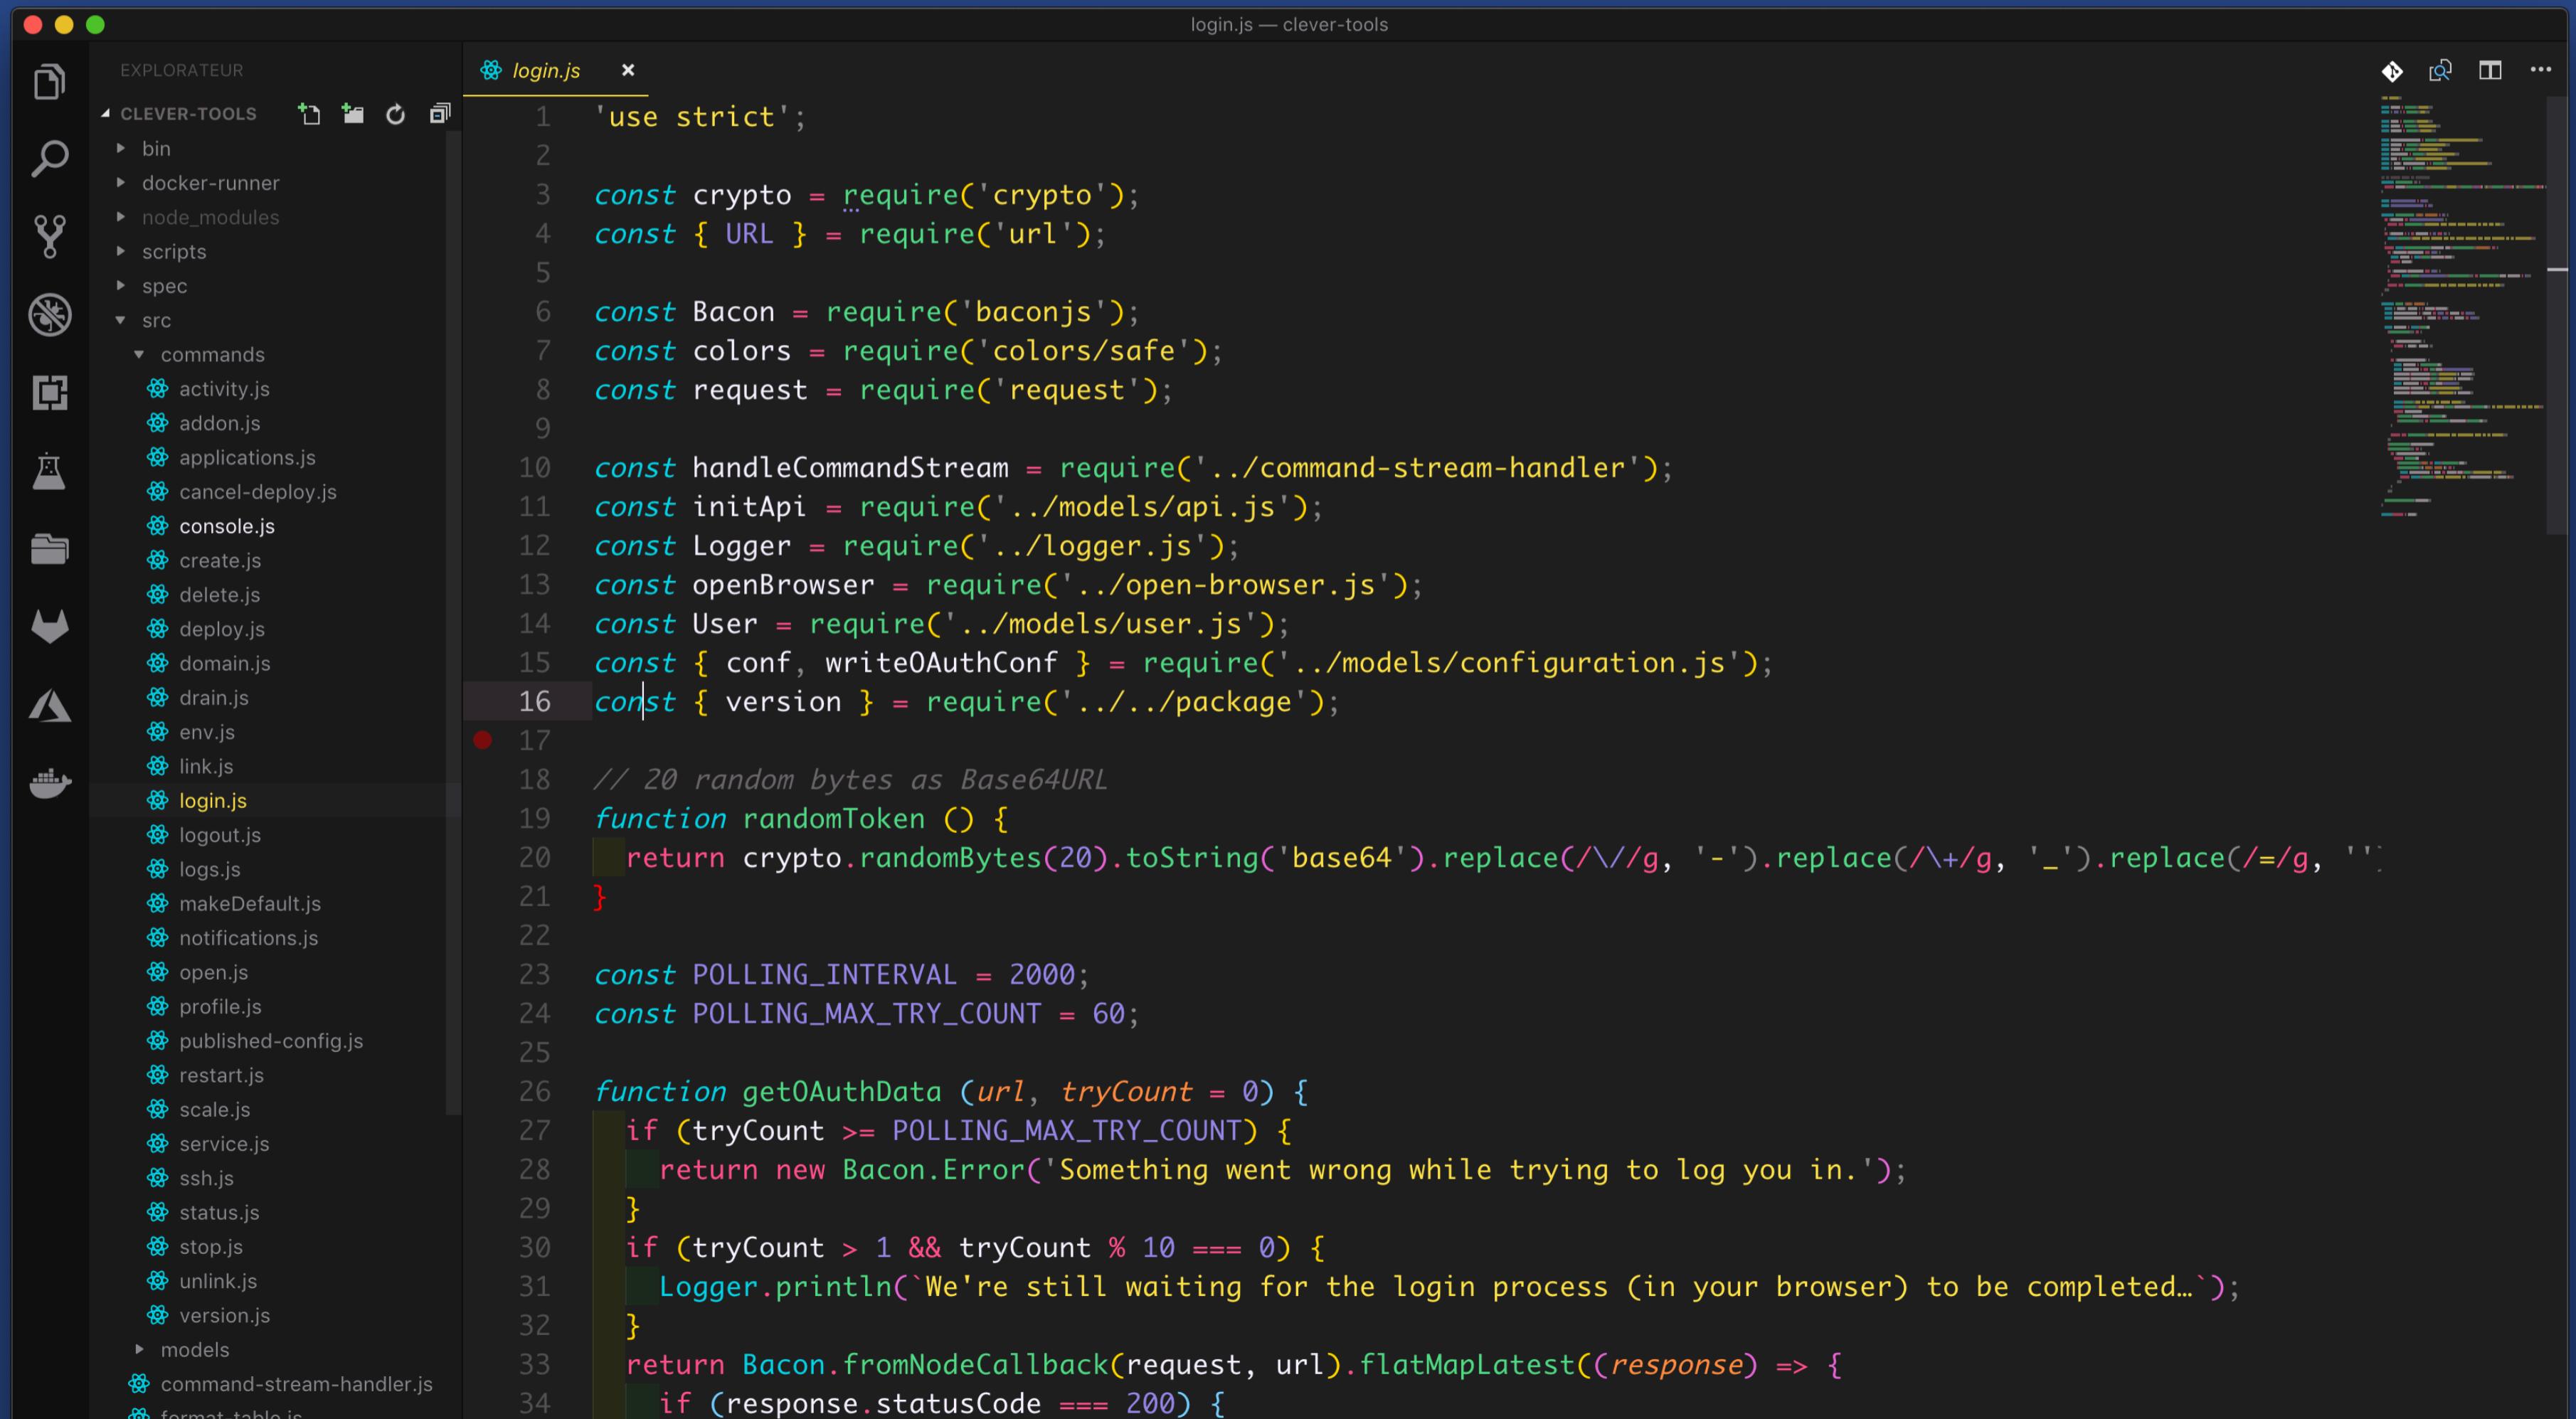

The screenshot shows the Visual Studio Code interface with a dark theme. The left sidebar contains icons for File, Find, Replace, Search, and other tools. The Explorer panel on the left shows a file tree for a project named "CLEVER-TOOLS". The main editor area displays a file named "login.js" with the following code:

```
'use strict';

const crypto = require('crypto');
const { URL } = require('url');

const Bacon = require('baconjs');
const colors = require('colors/safe');
const request = require('request');

const handleCommandStream = require('../command-stream-handler');
const initApi = require('../models/api.js');
const Logger = require('../logger.js');
const openBrowser = require('../open-browser.js');
const User = require('../models/user.js');
const { conf, writeOAuthConf } = require('../models/configuration.js');
const { version } = require('../package');

// 20 random bytes as Base64URL
function randomToken () {
    return crypto.randomBytes(20).toString('base64').replace(/\//g, '-').replace(/\+/g, '_').replace(/=/g, '');
}

const POLLING_INTERVAL = 2000;
const POLLING_MAX_TRY_COUNT = 60;

function getOAuthData (url, tryCount = 0) {
    if (tryCount >= POLLING_MAX_TRY_COUNT) {
        return new Bacon.Error(`Something went wrong while trying to log you in.`);
    }
    if (tryCount > 1 && tryCount % 10 === 0) {
        Logger.println(`We're still waiting for the login process (in your browser) to be completed...`);
    }
    return Bacon.fromNodeCallback(request, url).flatMapLatest((response) => {
        if (response.statusCode === 200) {
            return response.json();
        }
        return Bacon.error(`HTTP ${response.statusCode} error: ${response.statusText}`);
    });
}
```

Visual Studio Code

Preview

Fast to load

Customizable

Monthly updates


Integrated terminal

Git integration

Configuration

Visual Studio Code

Visual Config

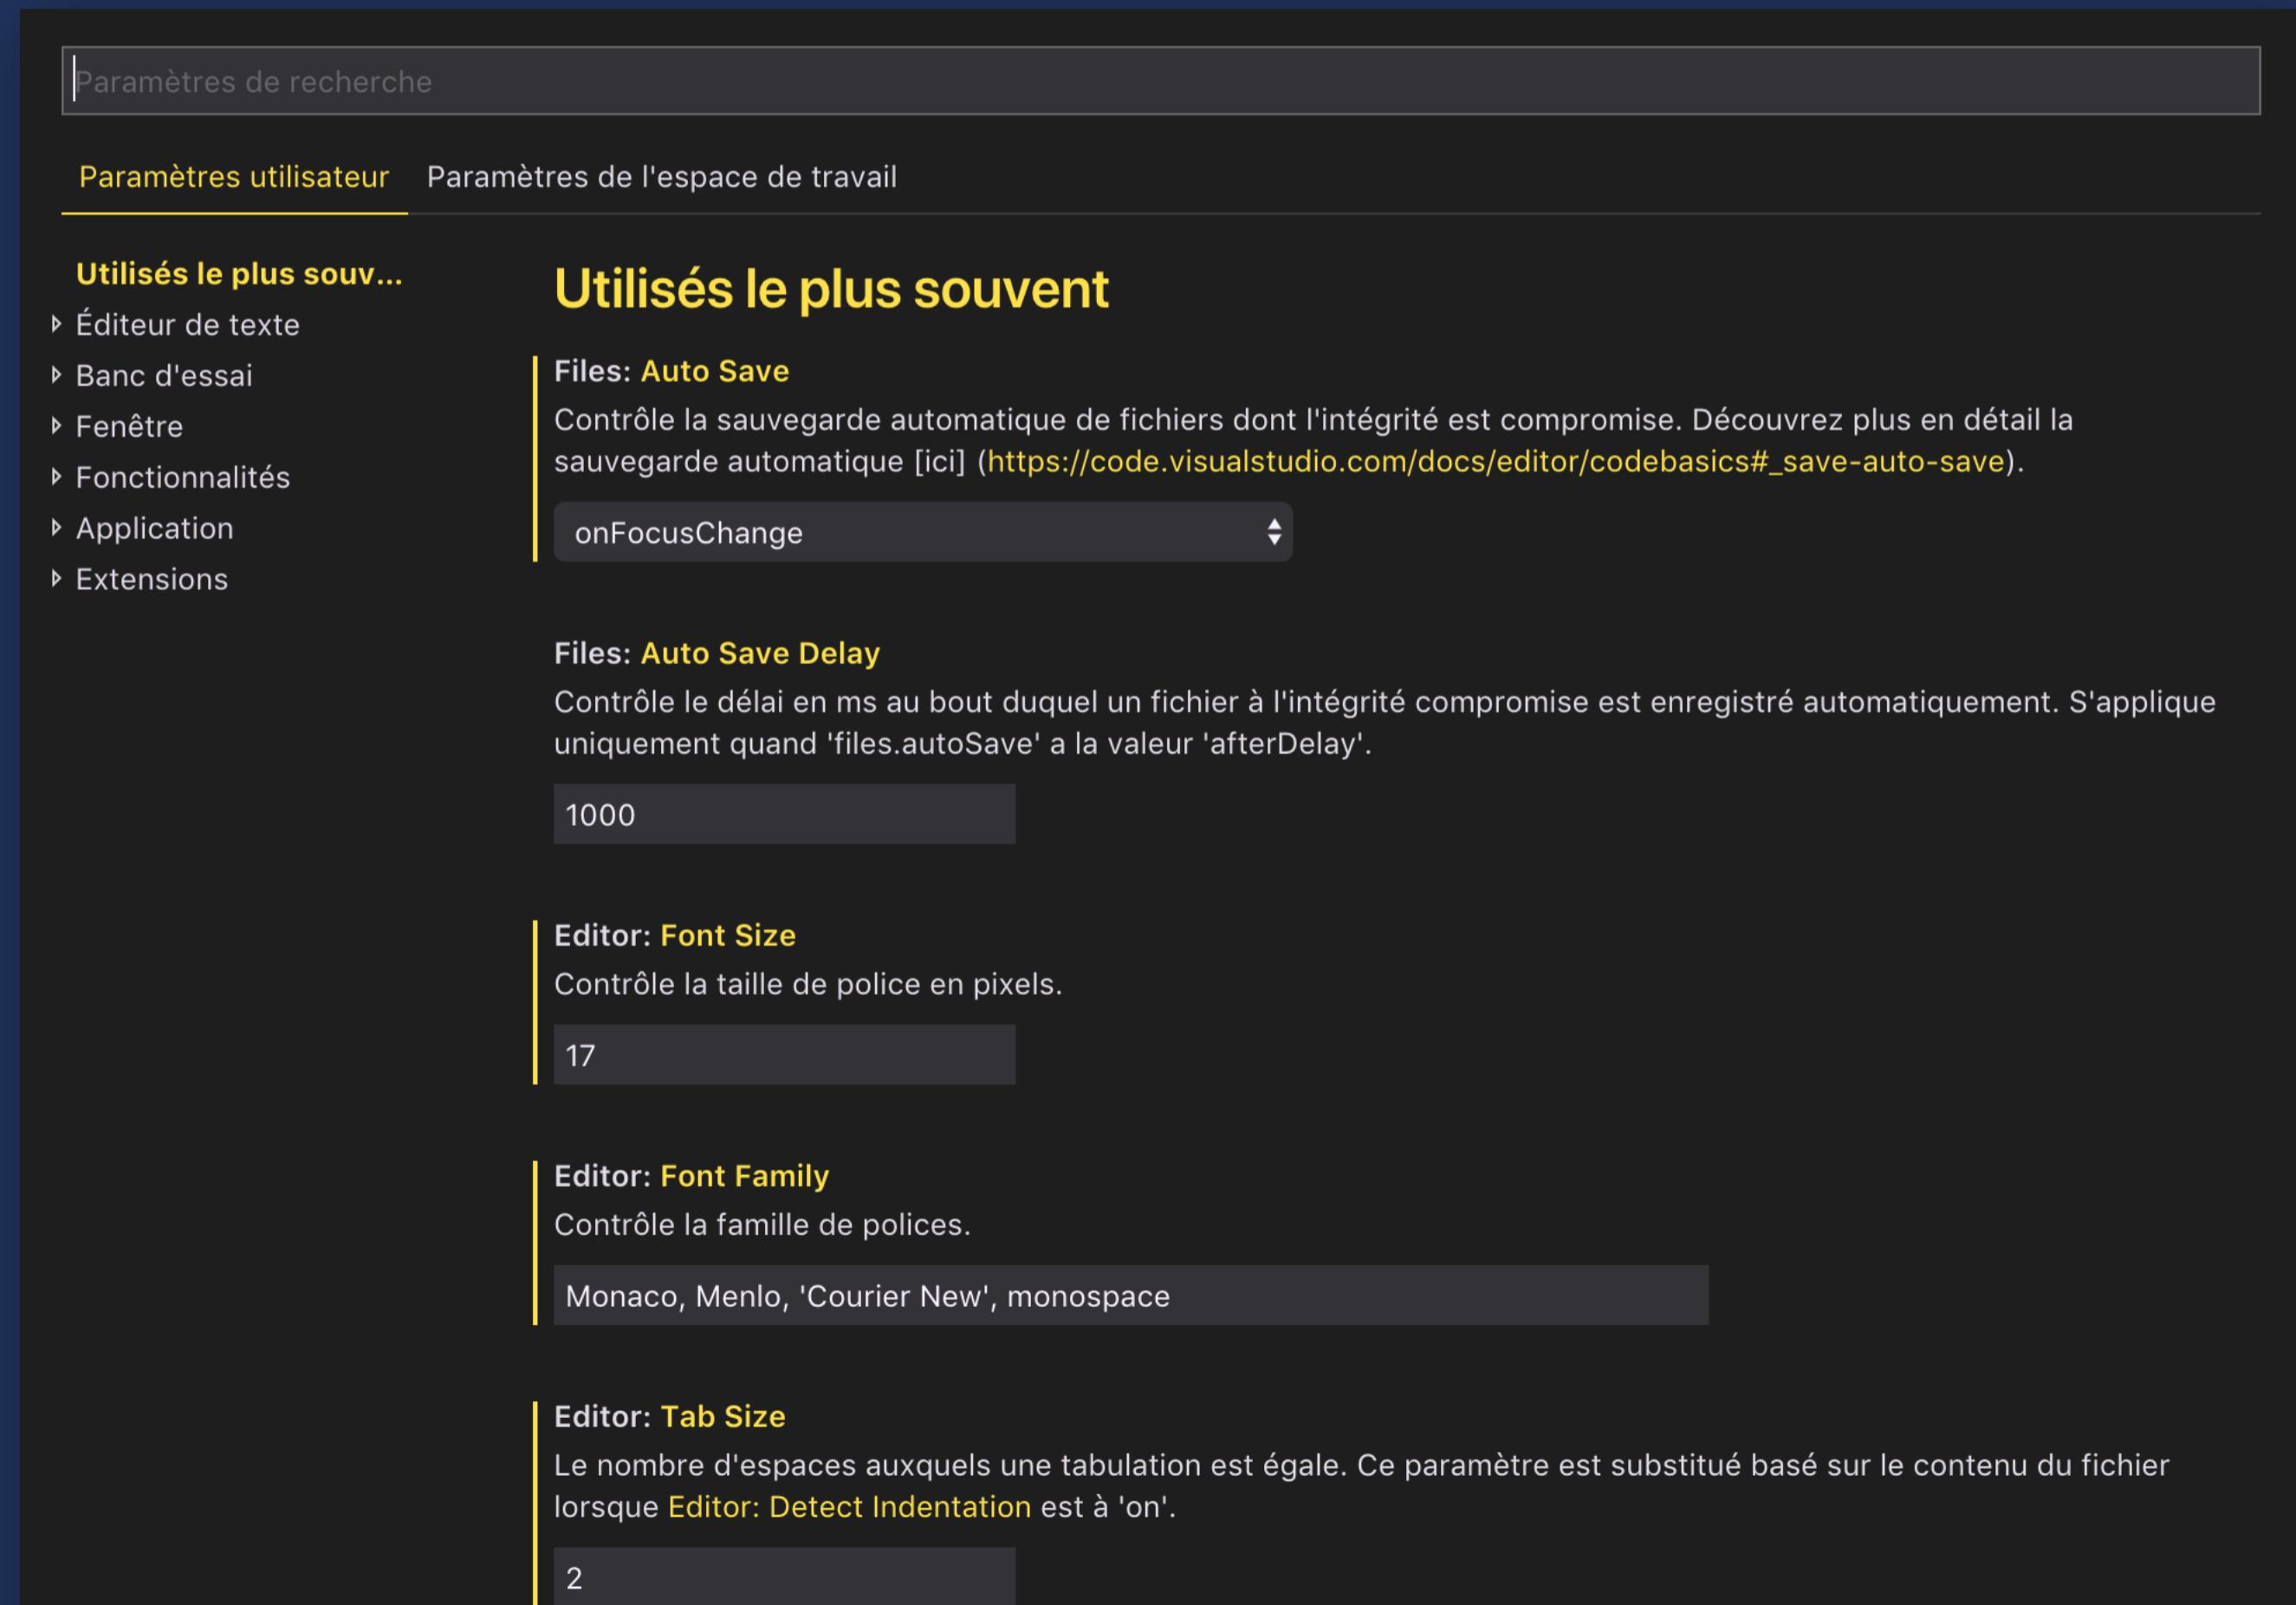

The screenshot shows the Visual Studio Code settings interface. At the top, there is a search bar labeled "Paramètres de recherche". Below it, two tabs are visible: "Paramètres utilisateur" (selected) and "Paramètres de l'espace de travail".

Utilisés le plus souvent

- Éditeur de texte
- Banc d'essai
- Fenêtre
- Fonctionnalités
- Application
- Extensions

Utilisés le plus souvent

Files: Auto Save
Contrôle la sauvegarde automatique de fichiers dont l'intégrité est compromise. Découvrez plus en détail la sauvegarde automatique [ici] (https://code.visualstudio.com/docs/editor/codebasics#_save-auto-save).

onFocusChange

Files: Auto Save Delay
Contrôle le délai en ms au bout duquel un fichier à l'intégrité compromise est enregistré automatiquement. S'applique uniquement quand 'files.autoSave' a la valeur 'afterDelay'.

1000

Editor: Font Size
Contrôle la taille de police en pixels.

17

Editor: Font Family
Contrôle la famille de polices.


Monaco, Menlo, 'Courier New', monospace

Editor: Tab Size
Le nombre d'espaces auxquels une tabulation est égale. Ce paramètre est substitué basé sur le contenu du fichier lorsque **Editor: Detect Indentation** est à 'on'.

2

Visual Studio Code

Code Config

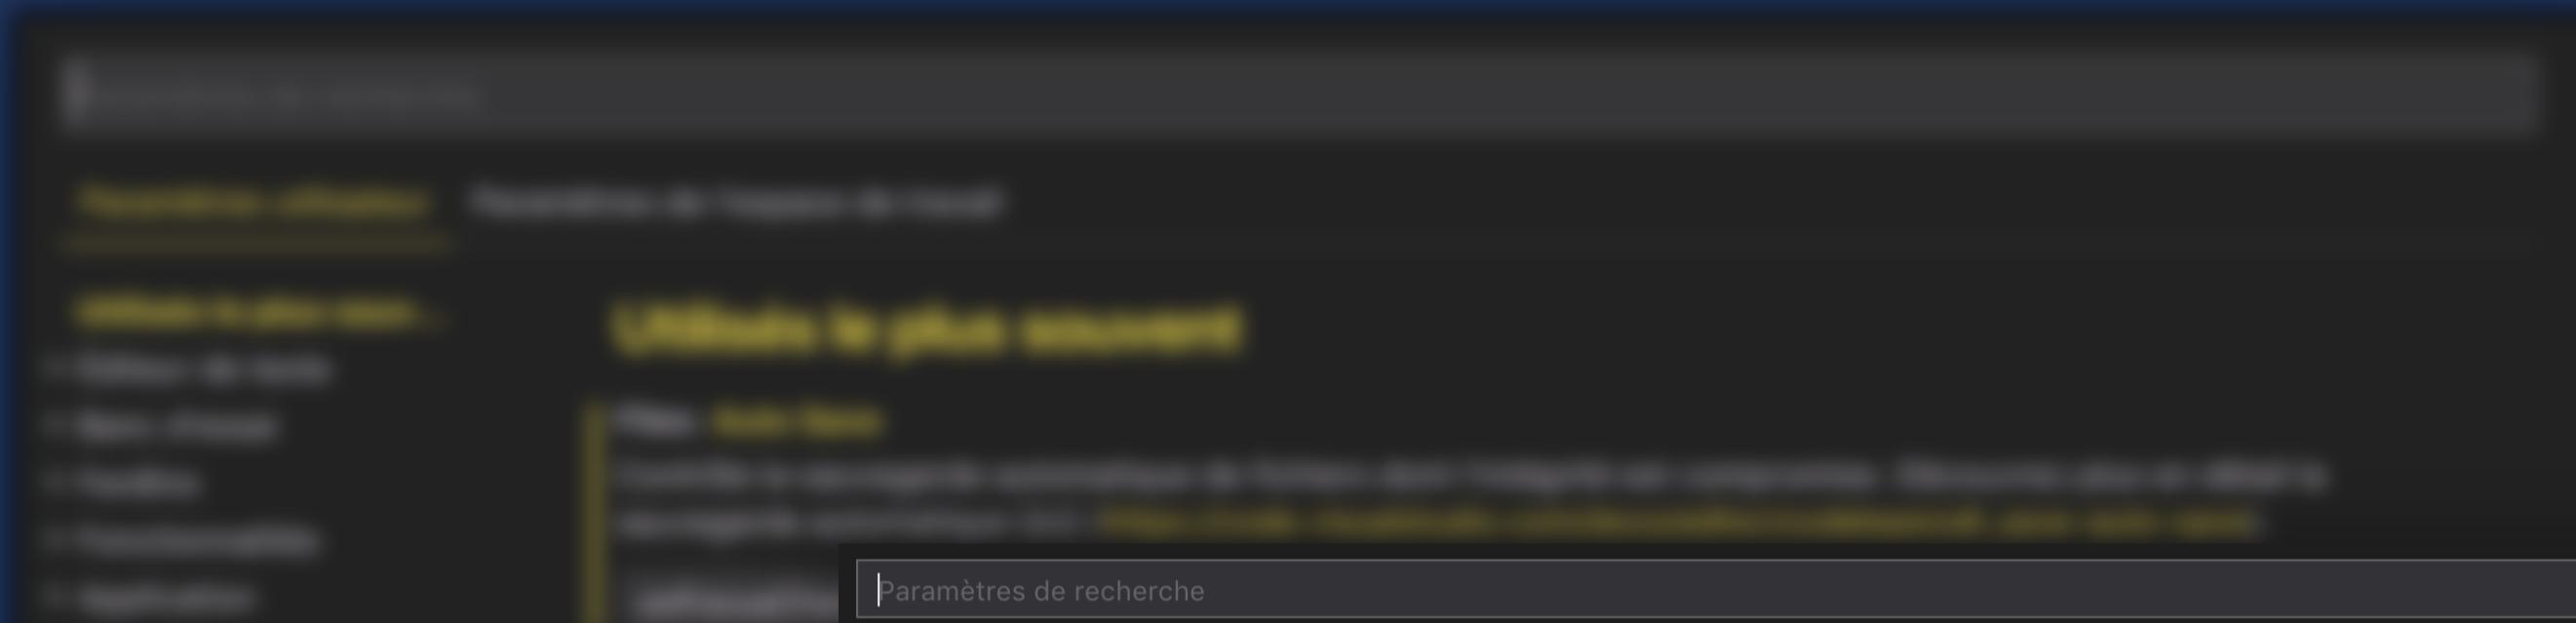

```
1  {
2    "editor.fontSize": 17,
3    "editor.cursorBlinking": "phase",
4    "editor.dragAndDrop": false,
5    "editor.formatOnPaste": true,
6    "editor.lineHeight": 25,
7    "editor.minimap.renderCharacters": false,
8    "editor.renderLineHighlight": "gutter",
9    "telemetry.enableTelemetry": false,
10   "telemetry.enableCrashReporter": false,
11   "workbench.colorTheme": "Monokai Pro (Filter Spec)",
12   "workbench.iconTheme": "Monokai Pro (Filter Spec)",
13   "emmet.includeLanguages": {
14     "javascript": "javascriptreact",
15     "jsx": "javascriptreact"
16   },
17   "editor.tabSize": 2,
18   "window.zoomLevel": 0,
19   "explorer.confirmDelete": false,
20   "explorer.confirmDragAndDrop": false,
21   "git.autofetch": true,
22   "workbench.startupEditor": "newUntitledFile",
23   "javascript.updateImportsOnFileMove.enabled": "
```

Visual Studio Code


Snippets

```
// Example:  
"Print to console": {  
  "prefix": "log",  
  "body": [  
    "console.log('$1', $0);",  
  ],  
  "description": "Log output to console"  
},  
"React class component": {  
  "prefix": "cc",  
  "body": [  
    "import React, { Component } from 'React'",  
    "import PropTypes from 'prop-types'",  
    "class $1 extends Component {",  
    "\trender() {",  
    "\t\treturn (",  
    "\t\t\t$0",  
    "\t\t);",  
    "\t}",  
    "}",  
    "$1.propTypes = {",  
    "};",  
    "",  
    "$1.defaultProps = {",  
    "};",  
    "",  
    "export default $1;"  
  ],  
  "description": "Create a react app component with prop-types"  
}  
}
```


Plugins

Visual Studio Code

Plugins

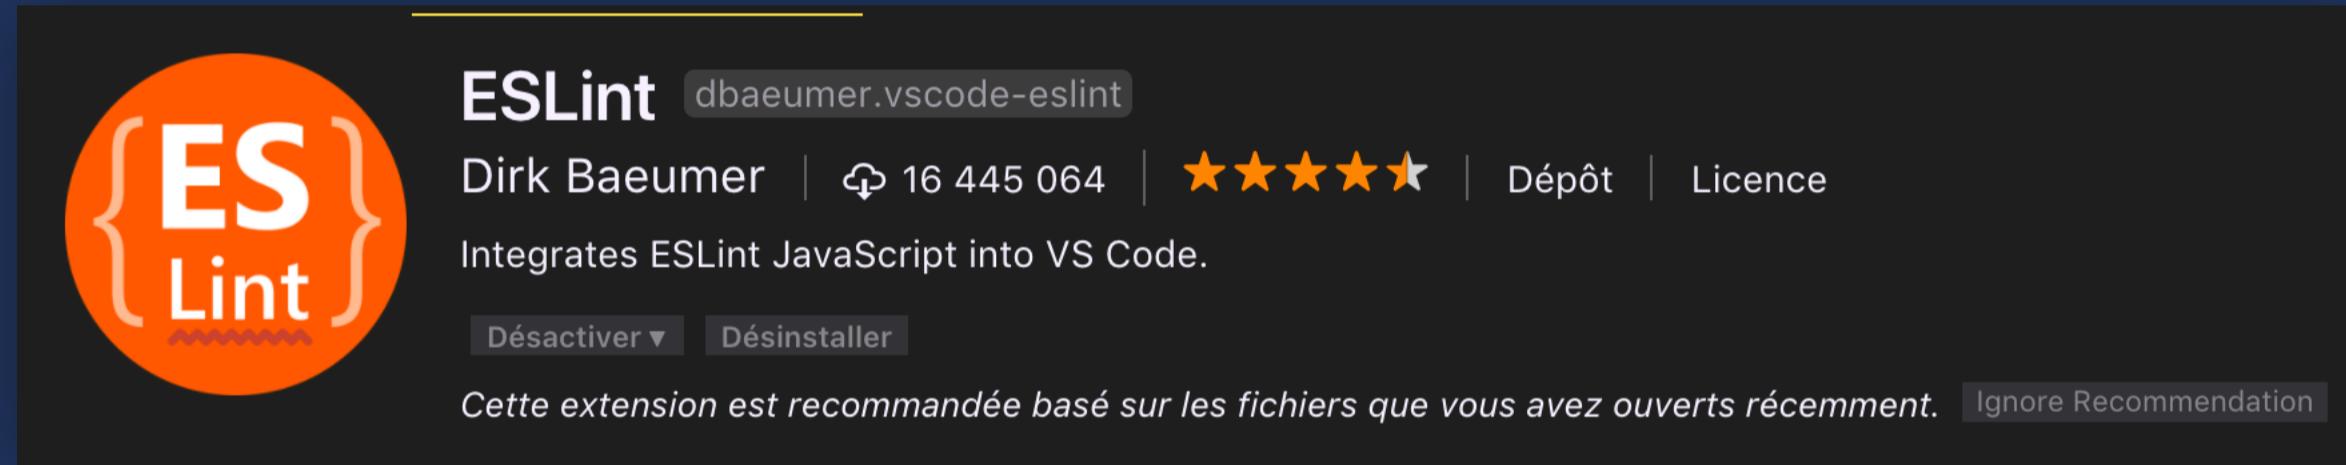

The screenshot shows the ESLint extension page in the Visual Studio Code Marketplace. The extension icon is a red circle containing the text '{ES} Lint'. The title is 'ESLint' with the identifier 'dbaeumer.vscode-eslint'. It shows 16 445 064 installs and a 5-star rating. The description reads 'Integrates ESLint JavaScript into VS Code.' There are buttons for 'Désactiver ▾' and 'Désinstaller'. A note at the bottom states 'Cette extension est recommandée basé sur les fichiers que vous avez ouverts récemment.' with a 'Ignore Recommendation' link.

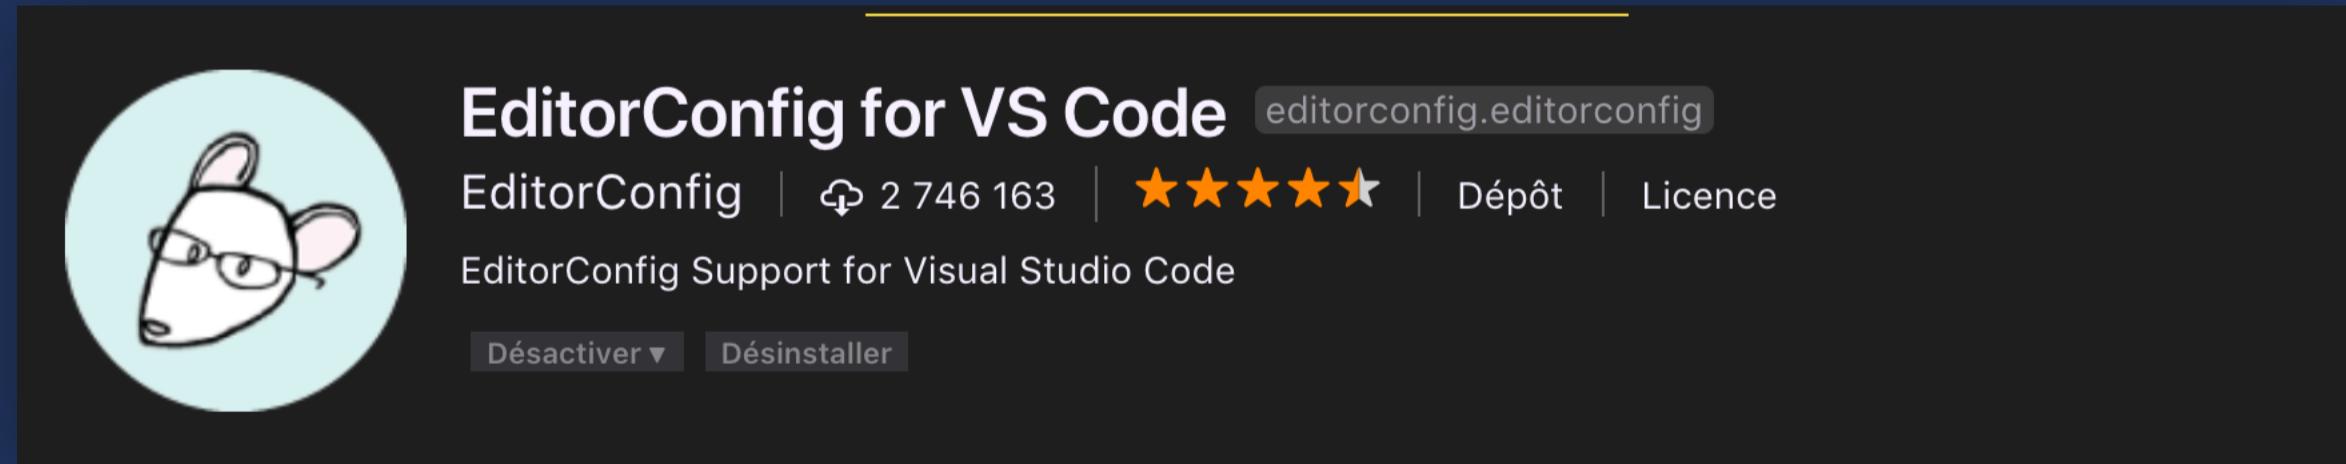

The screenshot shows the EditorConfig for VS Code extension page in the Visual Studio Code Marketplace. The extension icon is a white mouse wearing glasses. The title is 'EditorConfig for VS Code' with the identifier 'editorconfig.editorconfig'. It shows 2 746 163 installs and a 5-star rating. The description reads 'EditorConfig Support for Visual Studio Code.' There are buttons for 'Désactiver ▾' and 'Désinstaller'.

Visual Studio Code

Plugins



Local History xyz.local-history

xyz | 97 721 | ★★★★☆ | Dépôt

Save files into local history

Désactiver ▾ Désinstaller



Project Manager alefragnani.project-manager

Alessandro Fragnani | 2 535 197 | ★★★★☆ | Dépôt | Licence

Easily switch between projects

Désactiver ▾ Désinstaller



Git History donjayamanne.githistory

Don Jayamanne | 4 338 622 | ★★★★☆ | Dépôt | Licence

View git log, file history, compare branches or commits

Désactiver ▾ Désinstaller

Cette extension est recommandée basé sur les fichiers que vous avez ouverts récemment. [Ignore Recommendation](#)

Visual Studio Code

Plugins



Clipboard History

Anjali | 10 783 | ★★★★★ | Dépôt | Licence

Keep a history of your copied items and re-paste if needed

Désactiver ▾ Désinstaller



Auto Rename Tag

Jun Han | 1 242 175 | ★★★★★ | Dépôt

Auto rename paired HTML/XML tag

Désactiver ▾ Désinstaller



Git Blame

Wade Anderson | 1 213 595 | ★★★★★ | Dépôt | Licence

See git blame information in the status bar.

Désactiver ▾ Désinstaller



Debugger for Chrome

Microsoft | 15 718 909 | ★★★★★ | Dépôt | Licence

Debug your JavaScript code in the Chrome browser, or any other target that supports the Chrome Debugger

Désactiver ▾ Désinstaller

Cette extension est recommandée basé sur les fichiers que vous avez ouverts récemment.

Ignore Recommendation

Visual Studio Code

Plugins




Bracket Pair Colorizer 2 coenraads.bracket-pair-colorizer-2

CoenraadS | ⚡ 86 863 | ★★★★★ | Dépôt | Licence

A customizable extension for colorizing matching brackets

[Désactiver ▾](#) [Désinstaller](#)

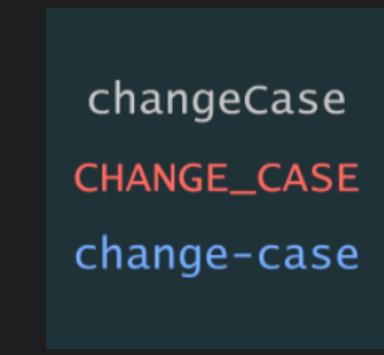

change-case wmaurer.change-case



wmaurer | ⚡ 112 945 | ★★★★★ | Dépôt | Licence

Quickly change the case (camelCase, CONSTANT_CASE, snake_case, etc) of the current selection or current word.

[Désactiver ▾](#) [Désinstaller](#)

Visual Studio Code

Plugins

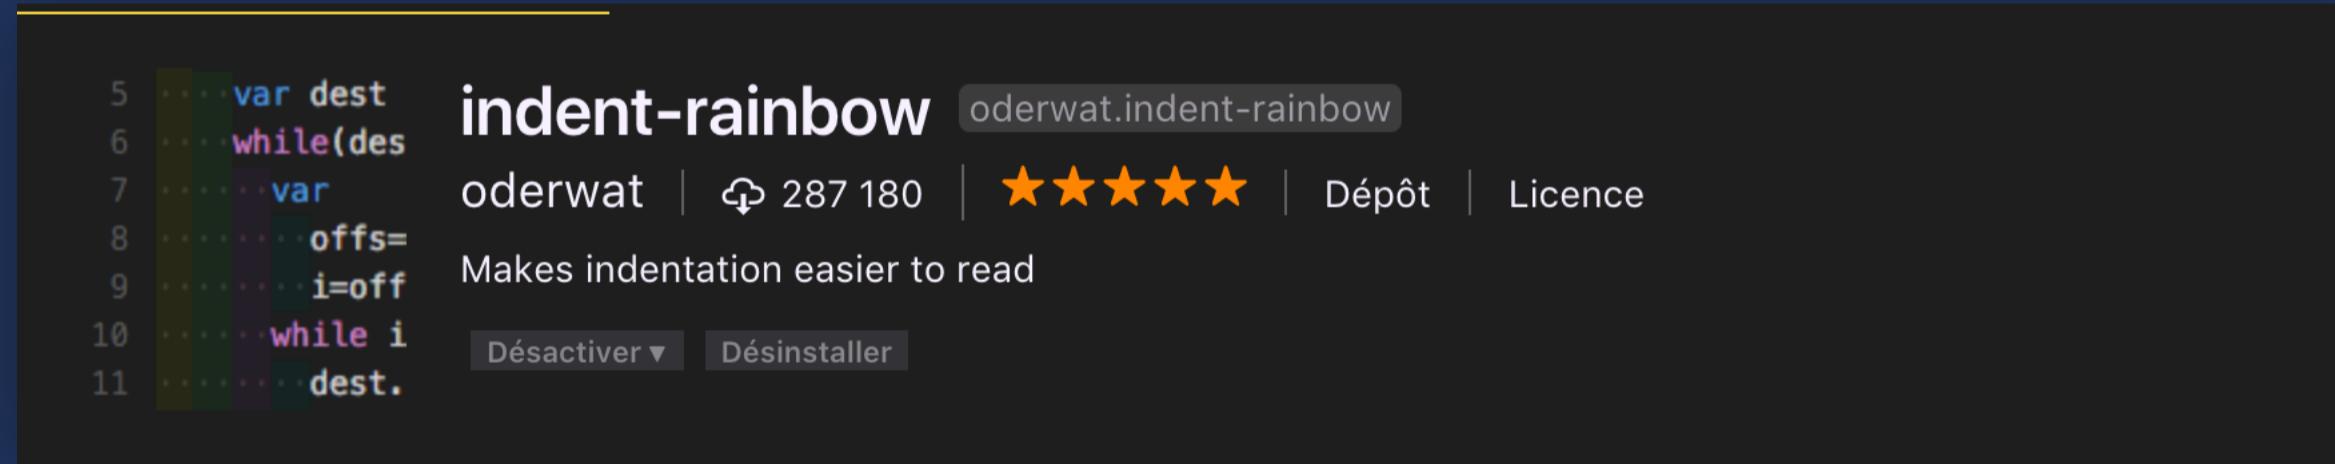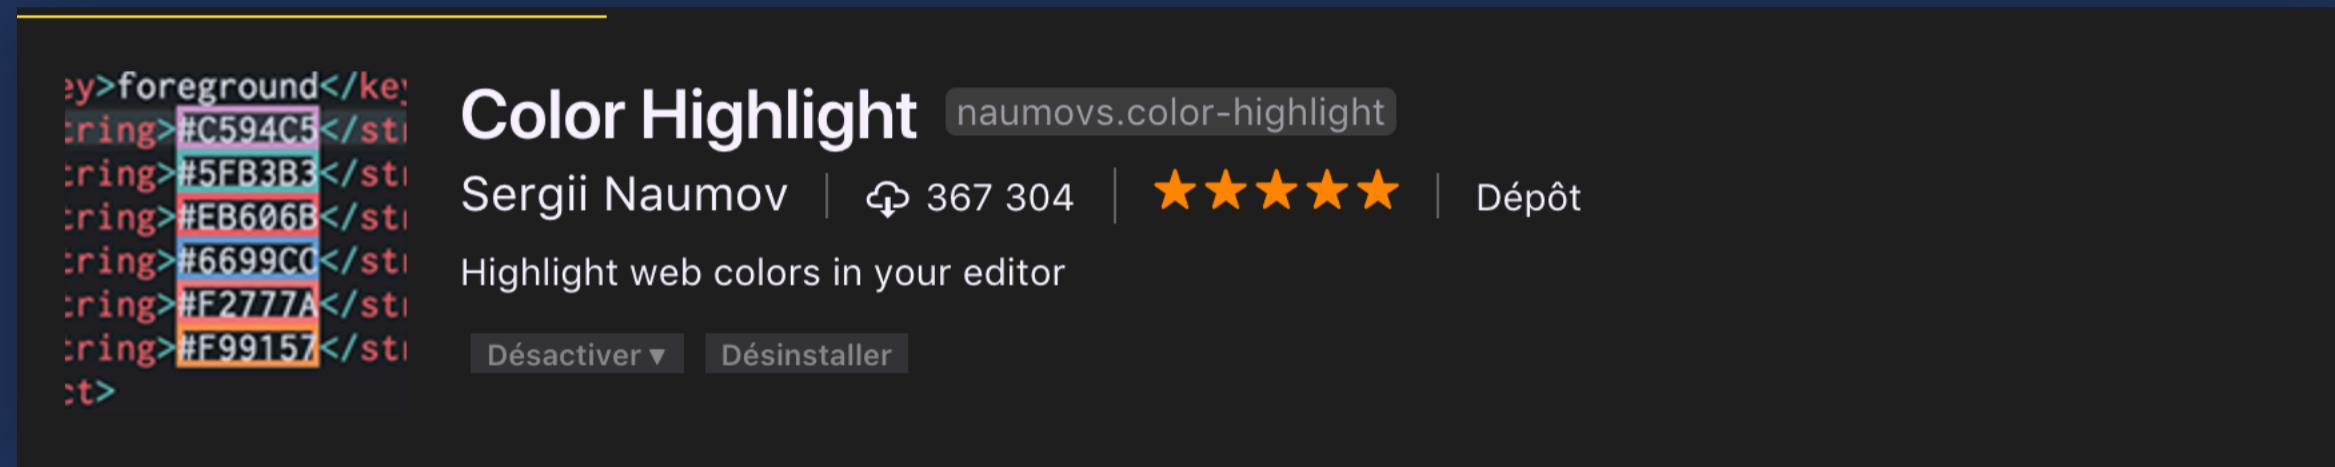

Veille

Veille

Medium

Medium



[HOME](#) [2069](#) [CULTURE](#) [TECH](#) [STARTUPS](#) [SELF](#) [POLITICS](#) [DESIGN](#) [HEALTH](#) [SCIENCE](#) [POPULAR](#) [COLLECTIONS](#) [MORE](#)



As a Designer, I Refuse to Call People 'Users'

In an industry that touches so many lives, accurate terminology is essential

Adam Lefton in User Friendly
Jan 15 · 5 min read ★



Why I Can't Quit Amazon

Even if I wish I could

Tessa Love
Jan 16 · 5 min read ★



There's a Better Way to Vent Your Frustration

Anna Goldfarb
Jan 23 · 6 min read ★



How to Stick With Your New Year's Resolution After the Excitement's...

Rae Nudson
Jan 25 · 7 min read ★



If You Only Read a Few Books in 2019, Read These

A reading list for becoming a better citi...

Ryan Holiday
Jan 22 · 12 min read ★

[SEE ALL FEATURED >](#)

TECHNOLOGY

Instagram Meme Accounts Are Pretty Now

Teen girls are using a new format to express themselves and forge connections online



New from



Veille

thenews.im

DESIGNER NEWS	PRODUCT HUNT	HACKER NEWS
<p>1 I was inspired by "10 year challenge" and res... 29 points by Valentyna Havruliuk • 6 comments</p>	<p>1 Paper Run 95 points by vimbabwe • 1 comment</p>	<p>1 Software ideas are born: step-by-step guide ... 54 points by maxchurilov • 7 comments</p>
<p>2 A simple notes app that lives in your browser... 4 points by Mininx ★ • No comments</p>	<p>2 SuperPay 76 points by Che Sampat • 6 comments</p>	<p>2 Battery Killers: Water Heaters Have Evolved i... 12 points by camtarn • 7 comments</p>
<p>3 Opening Old Design Files from a Shared Fol... 15 points by Pablo Stanley • No comments</p>	<p>3 Hackero 67 points by simon_frey_eu • 3 comments</p>	<p>3 Lapis: web framework for Lua and Moonscript 24 points by galfarragem • 2 comments</p>
<p>4 Designing Up Bank's Vertical Debit Card and... 37 points by Daniel Wearne • 12 comments</p>	<p>4 Flick 94 points by Andreas Asprou • 1 comment</p>	<p>4 Fermentation and Daily Life 61 points by colinprince • 11 comments</p>
<p>5 Moose Photo Creator: A Tool to Create Realis... 4 points by Marina Yalanska • 4 comments</p>	<p>5 Pocket Operator Modular System 38 points by razkarmi • 1 comment</p>	<p>5 Verilog sources for Western Digital's open so... 246 points by obl • 61 comments</p>
<p>6 2018 - The Year of Overflow 7 points by anna w • No comments</p>	<p>6 People. Places. Things. 37 points by Andrew Hicks • 1 comment</p>	<p>6 How Hacker News Stays Interesting 129 points by zwischenzug • 42 comments</p>
<p>7 What Parallax Lacks</p>	<p>7 StreamElements</p>	<p>7 Game Loop</p>

Veille

CSS Tricks

The screenshot shows the CSS-Tricks website interface. At the top, there's a navigation bar with links for Articles, Videos, Almanac, Snippets, Newsletter, Jobs, and Guides. A search bar contains the placeholder "e.g. flexbox". The main content area features a "Fresh Article" from January 25, 2019, titled "Need to Test API Endpoints? Two Quick Ways to Do It." by Chris Coyier. The article preview discusses using Jasmine for JavaScript testing and mentions a developer changing API endpoints. A "Read article" button is visible at the bottom.

Fresh Article January 25, 2019

Need to Test API Endpoints? Two Quick Ways to Do It.

Author Chris Coyier Comments Start the Conversation →

Here's a possibility! Perhaps you are testing your JavaScript with a framework like [Jasmine](#). That's nice because you can write lots of tests to cover your application, get a nice little UI to see the output, and even integrate it with build and deploy tools to make your ongoing development work safer.

Now, perhaps there is this zany developer on your team who keeps changing API endpoints on you — quite literally breaking things in the process. You decide ... [Read article](#)

Veille

Sites web

#421 — JANUARY 25, 2019

READ ON THE WEB

JavaScript Weekly

#272 — JANUARY 24, 2019

READ ON THE WEB

Node Weekly

#122 — JANUARY 23, 2019


READ ON THE WEB

react status

#375 — JANUARY 23, 2019

READ ON THE WEB

Frontend Focus

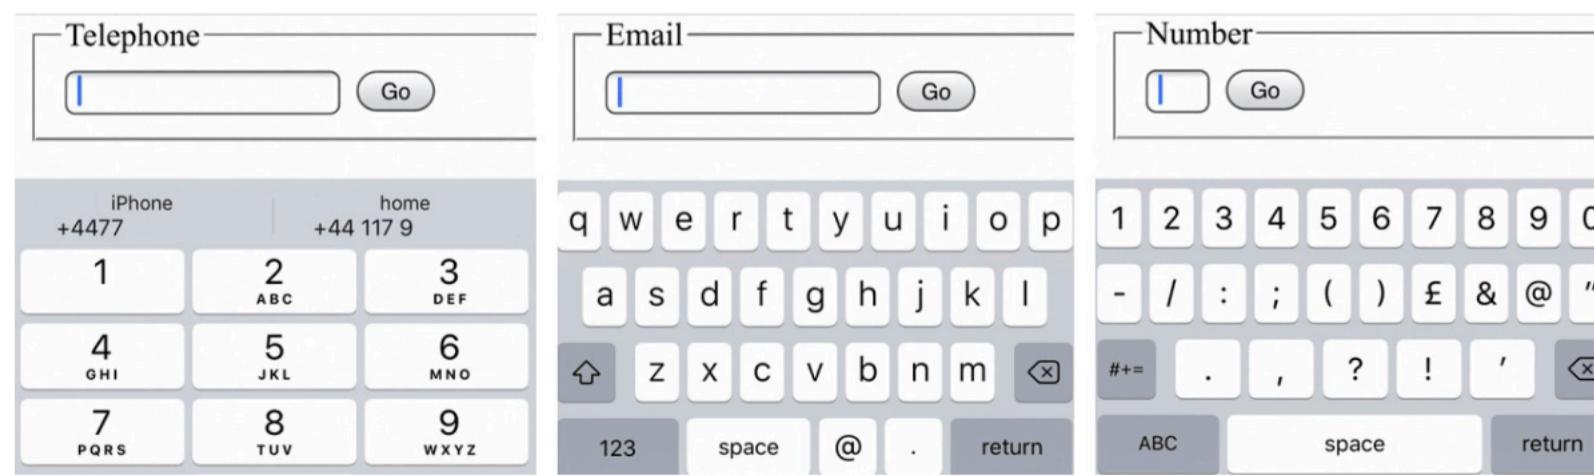

[HTML5's Input Types: Where Are They Now? — HTML5](#)

introduced 13 new types of form input (think things like `type="color"`), adding significantly to the number of different fields we could add to our forms. But what

<https://javascriptweekly.com>

<http://nodeweekly.com/>

<http://react.statuscode.com/>

<https://frontendfoc.us/>

Merci ! 😊

A close-up, monochromatic blue-toned photograph of a bear's face. The bear has dark, shaggy fur. Its eyes are closed or heavily shadowed, and its nose is prominent. The lighting highlights the texture of the fur and the contours of the face.

@DecampsRenan

@_BearStudio