

Assignment 1 – Resilient State Machine Replication: Paxos & PBFT

Course: Fundamentals of Distributed Systems

Name: Megha Pandey

Roll Number: G25AI1028

1. Introduction

Distributed systems must continue functioning correctly despite failures occurring in individual nodes or communication links. Modern distributed applications require both crash fault tolerance and Byzantine fault tolerance to ensure reliability, consistency, and security.

This project implements a resilient distributed transaction ledger consisting of five nodes operating in two modes:

1. Mode A – Crash Fault Tolerance

- Leader Election
- Paxos Consensus

2. Mode B – Byzantine Fault Tolerance

- Practical Byzantine Fault Tolerance (PBFT)
- Cryptographic Message Verification

The system is containerized using Docker and Docker Compose. A client continuously submits transactions while network failures and node crashes are simulated using a chaos testing script.

2. System Architecture


The distributed system consists of:

- 5 Consensus Nodes
- 1 Client Node
- 1 Byzantine Adversary Node
- Docker Network for Communication

Architecture Flow:

Client → Leader Node → Consensus Protocol → Distributed Ledger

Each node maintains a local transaction ledger. Consensus protocols ensure all non faulty nodes agree on the same transaction ordering before committing data.

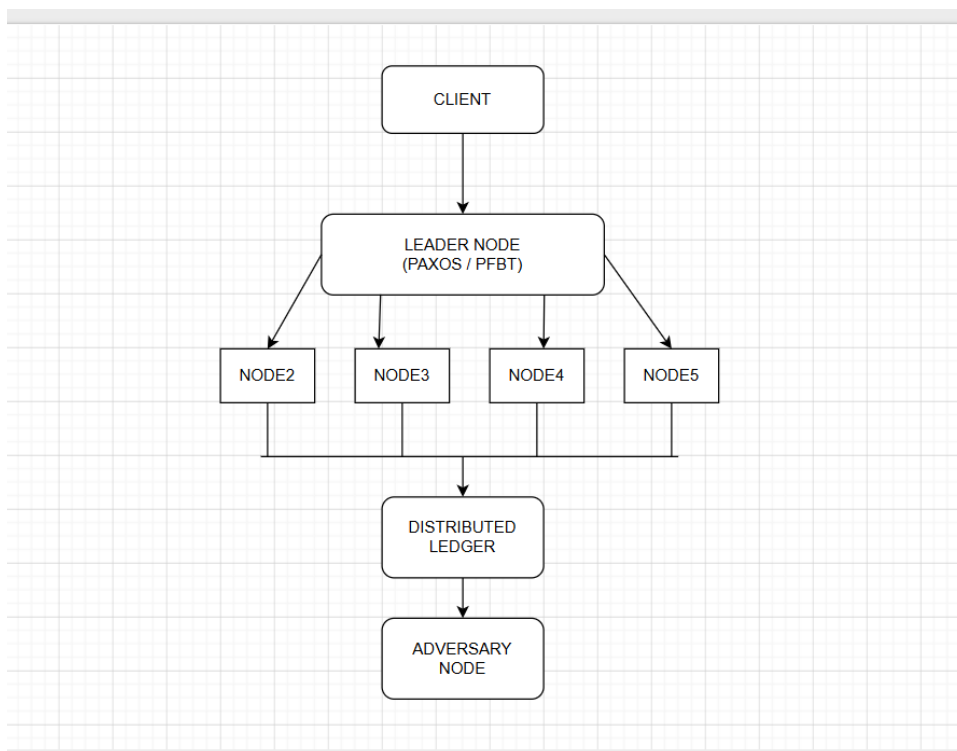

Caption: Docker Compose Deployment Showing All Running Containers

```


distributed-consensus-engine > src > node.py > ...
1 import os
2 from flask import Flask, request, jsonify
3 from crypto_utils import generate_keys, sign_message
4
5 app = Flask(__name__)
6
7 NODE_ID = os.getenv("NODE_ID", "1")
8
9 # Define routes here
10
11 if __name__ == '__main__':
12     app.run(host='0.0.0.0', port=5000)

```

```

hp@tegha MINGW64 ~/OneDrive/Documents/FDS/Assignment_1/distributed-consensus-engine
$ docker ps -a
CONTAINER ID   IMAGE                                COMMAND                  CREATED        STATUS
ac5f8d23485   distributed-consensus-engine-client  "python src/client.py"  22 minutes ago Up
bd1dd8997e63   distributed-consensus-engine-node1   "python src/node.py"    22 minutes ago Up
90c97487bb11   distributed-consensus-engine-node3   "python src/node.py"    22 minutes ago Up
06e61527dcf2   distributed-consensus-engine-node5   "python src/node.py"    22 minutes ago Up
3a6a2d489150   distributed-consensus-engine-node4   "python src/node.py"    22 minutes ago Up

```

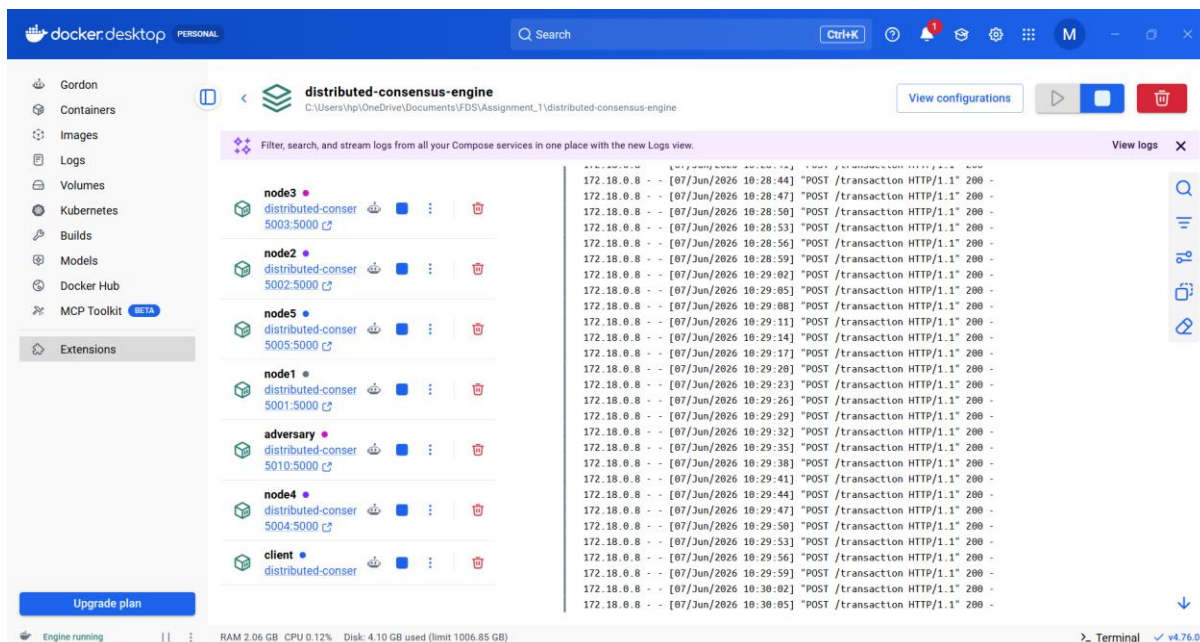

2.1. Key Distribution Architecture

Key Distribution Process

1. During node initialization, each node generates an RSA key pair.
2. The public key of every node is shared with all other nodes.
3. Private keys never leave the originating node.
4. All PBFT messages are digitally signed before transmission.
5. Receiving nodes verify signatures using stored public keys.
6. Messages with invalid signatures are rejected.

3. Process Coordination and Leader Election

The distributed system employs a simplified heartbeat-based leader coordination mechanism. A single node acts as the cluster leader and is responsible for coordinating consensus operations. The leader performs the role of:

- Paxos Proposer in Mode A
- PBFT Primary in Mode B

Each node periodically monitors leader availability. When a leader failure is detected or a leader election is triggered, a new leader is selected from the available nodes and assumes coordination responsibilities.

Leader Election Workflow

1. Nodes monitor the current leader.

2. If the leader becomes unavailable, an election process is initiated.
3. A new leader is selected from the active nodes.
4. The elected leader becomes the Paxos proposer and PBFT primary.
5. Consensus operations continue under the new leader.

State Transitions

Follower → Candidate → Leader


Benefits

- Prevents a single point of failure.
- Enables automatic recovery from leader crashes.
- Maintains cluster coordination during failures.

The implementation demonstrates leader reassignment and recovery during node failure scenarios as part of the chaos testing process.

Caption: Leader Election Endpoint Response

```
distributed-consensus-engine > src > node.py > elect
8
9 private_key, public_key = generate_keys()
10
11 ledger = []
12
13 leader_id = 1
14
15 @app.route("/elect")
16 def elect():
17     client | {'ledger_size': 786, 'status': 'success'}
18     node5 exited with code 137
19     node2 exited with code 137
20     adversary exited with code 137
21     node3 exited with code 137
22     client exited with code 137
23     node4 exited with code 137
24     node1 | Transaction Added: {'txn': 'TXN_858'}
25     node1 exited with code 137
26
27 hp@Megha MINGW64 ~/OneDrive/Documents/FDS/Assignment_1/distributed-consensus-engine (main)
28 $ curl http://localhost:5001/leader
29 {"leader":1}
30
31 hp@Megha MINGW64 ~/OneDrive/Documents/FDS/Assignment_1/distributed-consensus-engine (main)
32 $ curl http://localhost:5001/leader
33 {"leader":1}
34
35 hp@Megha MINGW64 ~/OneDrive/Documents/FDS/Assignment_1/distributed-consensus-engine (main)
36 $ curl http://localhost:5001/elect
37 {"leader":3}
38
39 hp@Megha MINGW64 ~/OneDrive/Documents/FDS/Assignment_1/distributed-consensus-engine (main)
40 $ curl http://localhost:5001/leader
41 {"leader":3}
42
43 hp@Megha MINGW64 ~/OneDrive/Documents/FDS/Assignment_1/distributed-consensus-engine (main)
44 $
```

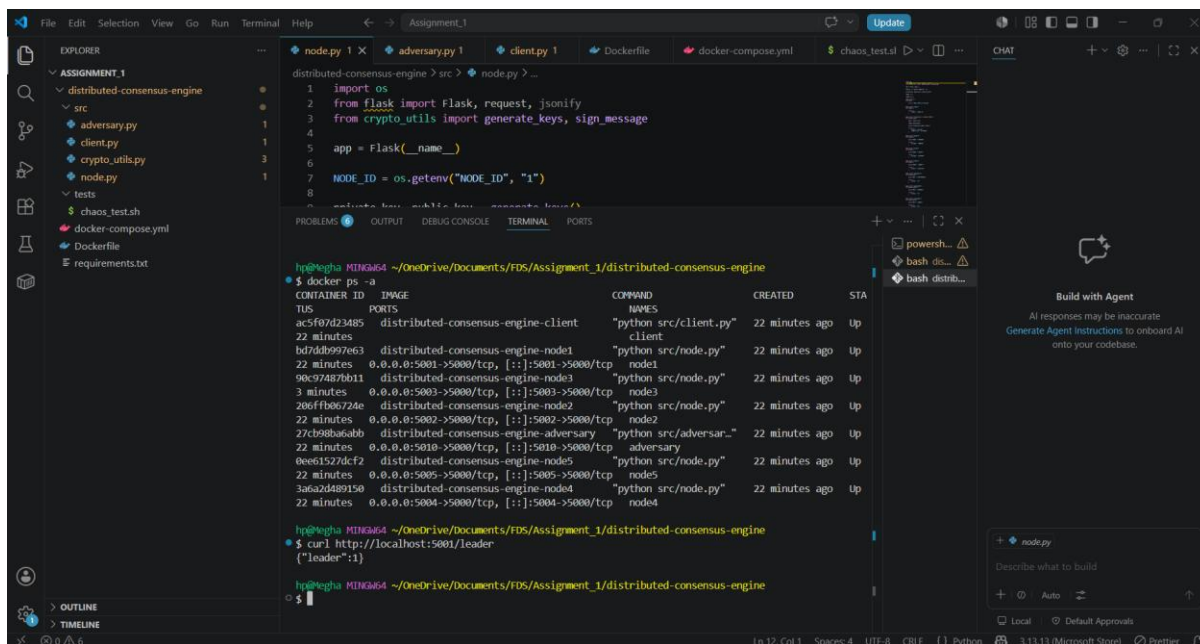

4. Paxos Implementation (Crash Fault Tolerance)

Mode A implements Paxos to tolerate crash failures.

The protocol consists of four phases:

4.1 Prepare Phase

The Leader generates a proposal number and sends a PREPARE request to all acceptors.

Purpose:

- Establish proposal ownership
- Prevent conflicting proposals

4.2 Promise Phase

Acceptors respond with PROMISE messages.

Purpose:

- Indicate willingness to accept the proposal
- Reject outdated proposal numbers

4.3 Accept Phase

The Leader sends an ACCEPT request containing the transaction value.

Purpose:

- Propose a transaction for agreement

4.4 Accepted Phase

Acceptors return ACCEPTED responses.

Once a majority is achieved, the transaction is committed to the ledger.

Paxos Workflow

Prepare → Promise → Accept → Accepted → Commit


Fault Tolerance

The system can tolerate up to two simultaneous crash failures while still maintaining consensus among the remaining nodes.

Caption: Paxos Prepare Phase

Caption: Paxos Accept Phase

Caption: Paxos Commit Phase

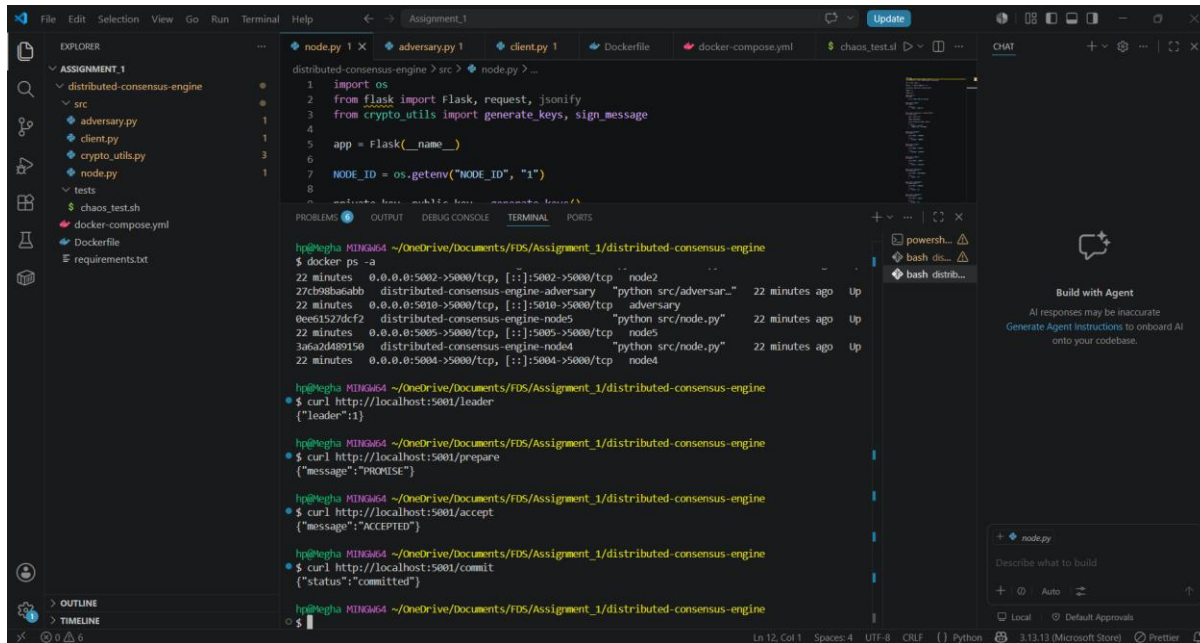

```
distributed-consensus-engine > src > node.py ...
1 import os
2 from flask import Flask, request, jsonify
3 from crypto_utils import generate_keys, sign_message
4
5 app = Flask(__name__)
6
7 NODE_ID = os.getenv("NODE_ID", "1")
8
9 @app.route("/leader", methods=["POST"])
10 def leader():
11     data = request.get_json()
12     if "message" in data:
13         message = data["message"]
14         # ... (Paxos logic) ...
15         commit()
16
17 def commit():
18     # ... (Commit logic) ...
19     return jsonify({"status": "committed"})
20
21 if __name__ == "__main__":
22     app.run(host="0.0.0.0", port=5000)
```

hp@hgha MINGW64 ~/OneDrive/Documents/FDS/Assignment_1/distributed-consensus-engine
\$ docker ps -a
22 minutes ago 0.0.0.0:5002->5000/tcp, [::]:5002->5000/tcp node2 Up
22 minutes ago 0.0.0.0:5010->5000/tcp, [::]:5010->5000/tcp adversary Up
22 minutes ago 0e61522dcf2 distributed-consensus-engine-node5 "python src/node.py" Up
22 minutes ago 0.0.0.0:5005->5000/tcp, [::]:5005->5000/tcp node5 Up
22 minutes ago 3a6a2d489150 distributed-consensus-engine-node4 "python src/node.py" Up
22 minutes ago 0.0.0.0:5004->5000/tcp, [::]:5004->5000/tcp node4 Up


hp@hgha MINGW64 ~/OneDrive/Documents/FDS/Assignment_1/distributed-consensus-engine
\$ curl http://localhost:5001/leader
{"leader":1}

hp@hgha MINGW64 ~/OneDrive/Documents/FDS/Assignment_1/distributed-consensus-engine
\$ curl http://localhost:5001/prepare
{"message":"PROMISE"}

hp@hgha MINGW64 ~/OneDrive/Documents/FDS/Assignment_1/distributed-consensus-engine
\$ curl http://localhost:5001/accept
{"message":"ACCEPTED"}

hp@hgha MINGW64 ~/OneDrive/Documents/FDS/Assignment_1/distributed-consensus-engine
\$ curl http://localhost:5001/commit
{"status":"committed"}

hp@hgha MINGW64 ~/OneDrive/Documents/FDS/Assignment_1/distributed-consensus-engine
\$

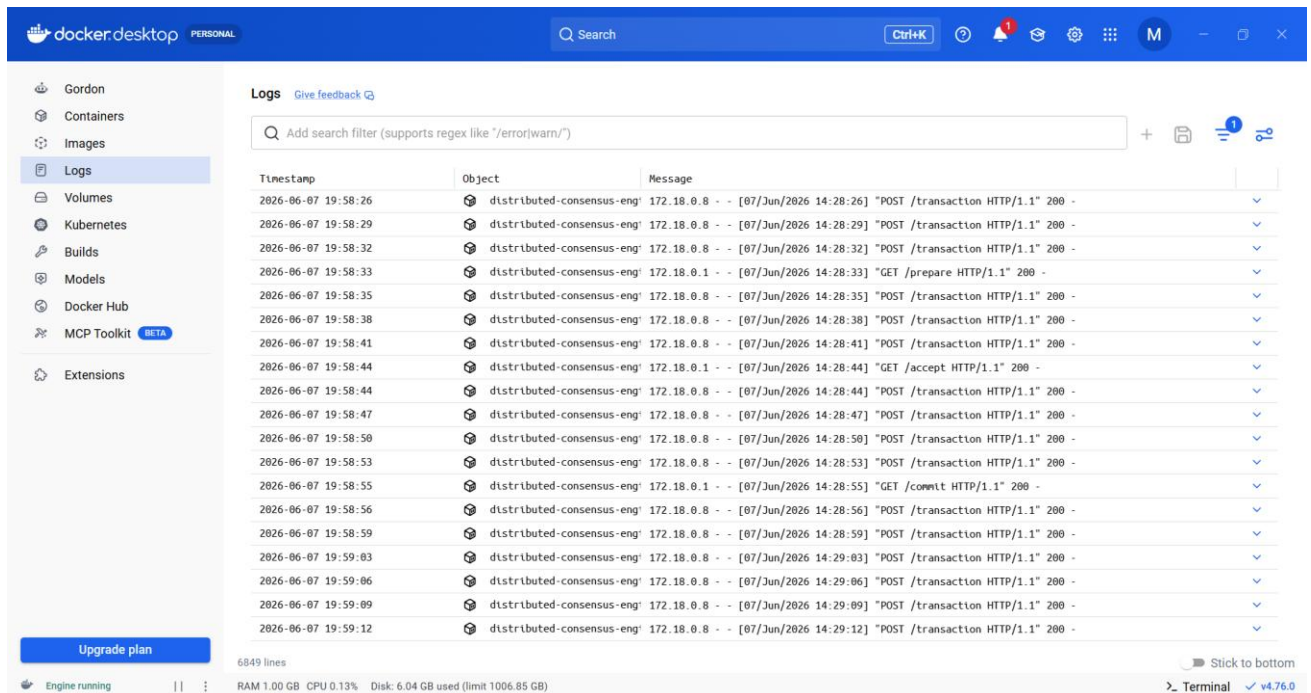

Timestamp	Object	Message
2026-06-07 19:58:26	distributed-consensus-eng	172.18.0.8 - - [07/Jun/2026 14:28:26] "POST /transaction HTTP/1.1" 200 -
2026-06-07 19:58:29	distributed-consensus-eng	172.18.0.8 - - [07/Jun/2026 14:28:29] "POST /transaction HTTP/1.1" 200 -
2026-06-07 19:58:32	distributed-consensus-eng	172.18.0.8 - - [07/Jun/2026 14:28:32] "POST /transaction HTTP/1.1" 200 -
2026-06-07 19:58:33	distributed-consensus-eng	172.18.0.1 - - [07/Jun/2026 14:28:33] "GET /prepare HTTP/1.1" 200 -
2026-06-07 19:58:35	distributed-consensus-eng	172.18.0.8 - - [07/Jun/2026 14:28:35] "POST /transaction HTTP/1.1" 200 -
2026-06-07 19:58:38	distributed-consensus-eng	172.18.0.8 - - [07/Jun/2026 14:28:38] "POST /transaction HTTP/1.1" 200 -
2026-06-07 19:58:41	distributed-consensus-eng	172.18.0.8 - - [07/Jun/2026 14:28:41] "POST /transaction HTTP/1.1" 200 -
2026-06-07 19:58:44	distributed-consensus-eng	172.18.0.1 - - [07/Jun/2026 14:28:44] "GET /accept HTTP/1.1" 200 -
2026-06-07 19:58:44	distributed-consensus-eng	172.18.0.8 - - [07/Jun/2026 14:28:44] "POST /transaction HTTP/1.1" 200 -
2026-06-07 19:58:47	distributed-consensus-eng	172.18.0.8 - - [07/Jun/2026 14:28:47] "POST /transaction HTTP/1.1" 200 -
2026-06-07 19:58:50	distributed-consensus-eng	172.18.0.8 - - [07/Jun/2026 14:28:50] "POST /transaction HTTP/1.1" 200 -
2026-06-07 19:58:53	distributed-consensus-eng	172.18.0.8 - - [07/Jun/2026 14:28:53] "POST /transaction HTTP/1.1" 200 -
2026-06-07 19:58:55	distributed-consensus-eng	172.18.0.1 - - [07/Jun/2026 14:28:55] "GET /commit HTTP/1.1" 200 -
2026-06-07 19:58:56	distributed-consensus-eng	172.18.0.8 - - [07/Jun/2026 14:28:56] "POST /transaction HTTP/1.1" 200 -
2026-06-07 19:58:59	distributed-consensus-eng	172.18.0.8 - - [07/Jun/2026 14:28:59] "POST /transaction HTTP/1.1" 200 -
2026-06-07 19:59:03	distributed-consensus-eng	172.18.0.8 - - [07/Jun/2026 14:29:03] "POST /transaction HTTP/1.1" 200 -
2026-06-07 19:59:06	distributed-consensus-eng	172.18.0.8 - - [07/Jun/2026 14:29:06] "POST /transaction HTTP/1.1" 200 -
2026-06-07 19:59:09	distributed-consensus-eng	172.18.0.8 - - [07/Jun/2026 14:29:09] "POST /transaction HTTP/1.1" 200 -
2026-06-07 19:59:12	distributed-consensus-eng	172.18.0.8 - - [07/Jun/2026 14:29:12] "POST /transaction HTTP/1.1" 200 -

5. PBFT Implementation (Byzantine Fault Tolerance)

Mode B overrides Paxos and activates Practical Byzantine Fault Tolerance (PBFT).

PBFT is designed to tolerate malicious behavior.

For:

$n = 5$ nodes

Maximum Byzantine Faults:

$f = 1$

PBFT Phases

Pre-Prepare

Primary node distributes the proposed transaction.

Prepare

Replica nodes validate and acknowledge the transaction.

Commit

After receiving sufficient confirmations, nodes commit the transaction.


PBFT Workflow

Pre-Prepare → Prepare → Commit

Byzantine Tolerance

PBFT ensures consensus even when one node behaves maliciously.

Caption: PBFT Pre-Prepare Phase

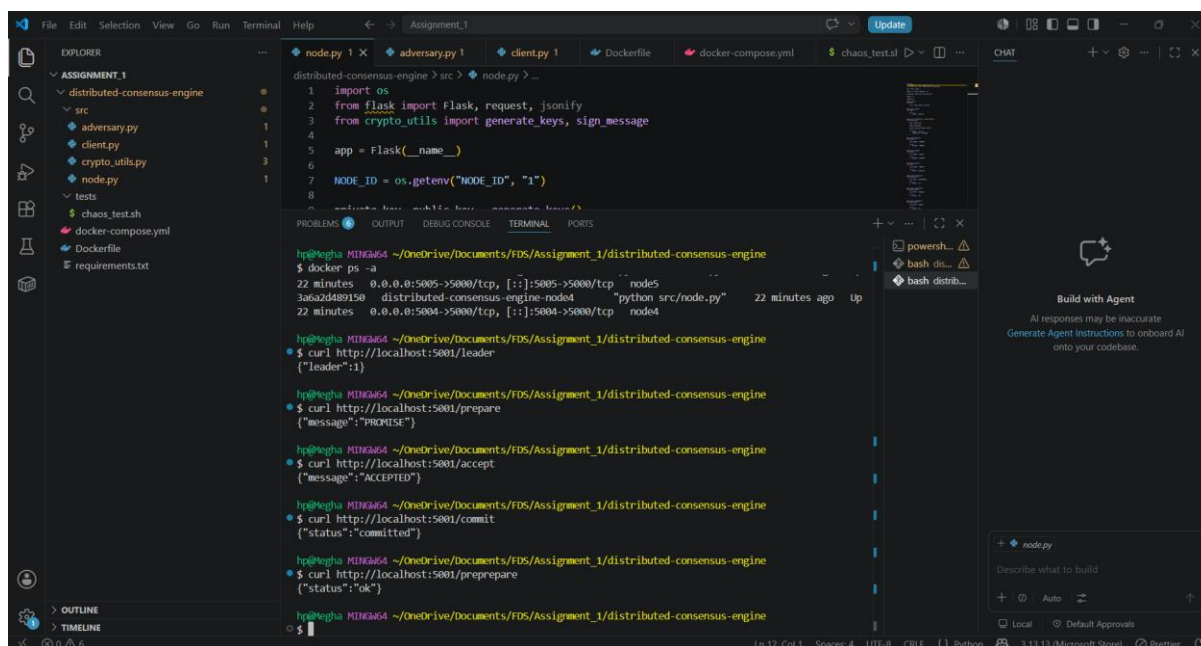

```
distributed-consensus-engine > src > node.py > ...
1 import os
2 from flask import Flask, request, jsonify
3 from crypto_utils import generate_keys, sign_message
4
5 app = Flask(__name__)
6
7 NODE_ID = os.getenv("NODE_ID", "1")
8
9 # Private key, public key, consensus key
10 private_key, public_key, consensus_key = generate_keys()

hp@hghu MINGW64 ~/OneDrive/Documents/FDS/Assignment_1/distributed-consensus-engine
$ docker ps -a
22 minutes 0.0.0.0:5005->5000/tcp, [::]:5005->5000/tcp node5
3a6a2d489150 distributed-consensus-engine-noded "python src/node.py" 22 minutes ago Up
22 minutes 0.0.0.0:5004->5000/tcp, [::]:5004->5000/tcp node4

hp@hghu MINGW64 ~/OneDrive/Documents/FDS/Assignment_1/distributed-consensus-engine
$ curl http://localhost:5001/leader
{"leader":1}

hp@hghu MINGW64 ~/OneDrive/Documents/FDS/Assignment_1/distributed-consensus-engine
$ curl http://localhost:5001/prepare
{"message":"PROPOSE"}

hp@hghu MINGW64 ~/OneDrive/Documents/FDS/Assignment_1/distributed-consensus-engine
$ curl http://localhost:5001/accept
{"message":"ACCEPTED"}

hp@hghu MINGW64 ~/OneDrive/Documents/FDS/Assignment_1/distributed-consensus-engine
$ curl http://localhost:5001/commit
{"status":"committed"}

hp@hghu MINGW64 ~/OneDrive/Documents/FDS/Assignment_1/distributed-consensus-engine
$ curl http://localhost:5001/preprepare
{"status":"ok"}

hp@hghu MINGW64 ~/OneDrive/Documents/FDS/Assignment_1/distributed-consensus-engine
$
```

Caption: PBFT Prepare Phase


```
distributed-consensus-engine > src > node.py > ...
1 import os
2 from flask import Flask, request, jsonify
3 from crypto_utils import generate_keys, sign_message
4
5 app = Flask(__name__)
6
7 NODE_ID = os.getenv("NODE_ID", "1")
8
9 # ... (rest of the code) ...

hp@megha MINGW64 ~/OneDrive/Documents/FDS/Assignment_1/distributed-consensus-engine
$ docker ps -a
CONTAINER ID   IMAGE                                COMMAND                  STATUS
distributed-consensus-engine-1   hp@megha MINGW64 ~/OneDrive/Documents/FDS/Assignment_1/distributed-consensus-engine
$ curl http://localhost:5001/leader
{"leader":1}
hp@megha MINGW64 ~/OneDrive/Documents/FDS/Assignment_1/distributed-consensus-engine
$ curl http://localhost:5001/prepare
{"message":"PROPOSE"}
hp@megha MINGW64 ~/OneDrive/Documents/FDS/Assignment_1/distributed-consensus-engine
$ curl http://localhost:5001/accept
{"message":"ACCEPTED"}
hp@megha MINGW64 ~/OneDrive/Documents/FDS/Assignment_1/distributed-consensus-engine
$ curl http://localhost:5001/commit
{"status":"committed"}
hp@megha MINGW64 ~/OneDrive/Documents/FDS/Assignment_1/distributed-consensus-engine
$ curl http://localhost:5001/preprepare
{"status":"ok"}
hp@megha MINGW64 ~/OneDrive/Documents/FDS/Assignment_1/distributed-consensus-engine
$ curl http://localhost:5001/preparepbft
{"status":"ok"}
hp@megha MINGW64 ~/OneDrive/Documents/FDS/Assignment_1/distributed-consensus-engine
$
```

Caption: PBFT Commit Phase

```
distributed-consensus-engine > src > node.py > ...
1 import os
2 from flask import Flask, request, jsonify
3 from crypto_utils import generate_keys, sign_message
4
5 app = Flask(__name__)
6
7 NODE_ID = os.getenv("NODE_ID", "1")
8
9 # ... (rest of the code) ...

hp@megha MINGW64 ~/OneDrive/Documents/FDS/Assignment_1/distributed-consensus-engine
$ curl http://localhost:5001/leader
{"leader":1}
hp@megha MINGW64 ~/OneDrive/Documents/FDS/Assignment_1/distributed-consensus-engine
$ curl http://localhost:5001/prepare
{"message":"PROPOSE"}
hp@megha MINGW64 ~/OneDrive/Documents/FDS/Assignment_1/distributed-consensus-engine
$ curl http://localhost:5001/accept
{"message":"ACCEPTED"}
hp@megha MINGW64 ~/OneDrive/Documents/FDS/Assignment_1/distributed-consensus-engine
$ curl http://localhost:5001/commit
{"status":"committed"}
hp@megha MINGW64 ~/OneDrive/Documents/FDS/Assignment_1/distributed-consensus-engine
$ curl http://localhost:5001/preprepare
{"status":"ok"}
hp@megha MINGW64 ~/OneDrive/Documents/FDS/Assignment_1/distributed-consensus-engine
$ curl http://localhost:5001/preparepbft
{"status":"ok"}
hp@megha MINGW64 ~/OneDrive/Documents/FDS/Assignment_1/distributed-consensus-engine
$ curl http://localhost:5001/commitpbft
{"status":"ok"}
hp@megha MINGW64 ~/OneDrive/Documents/FDS/Assignment_1/distributed-consensus-engine
$
```

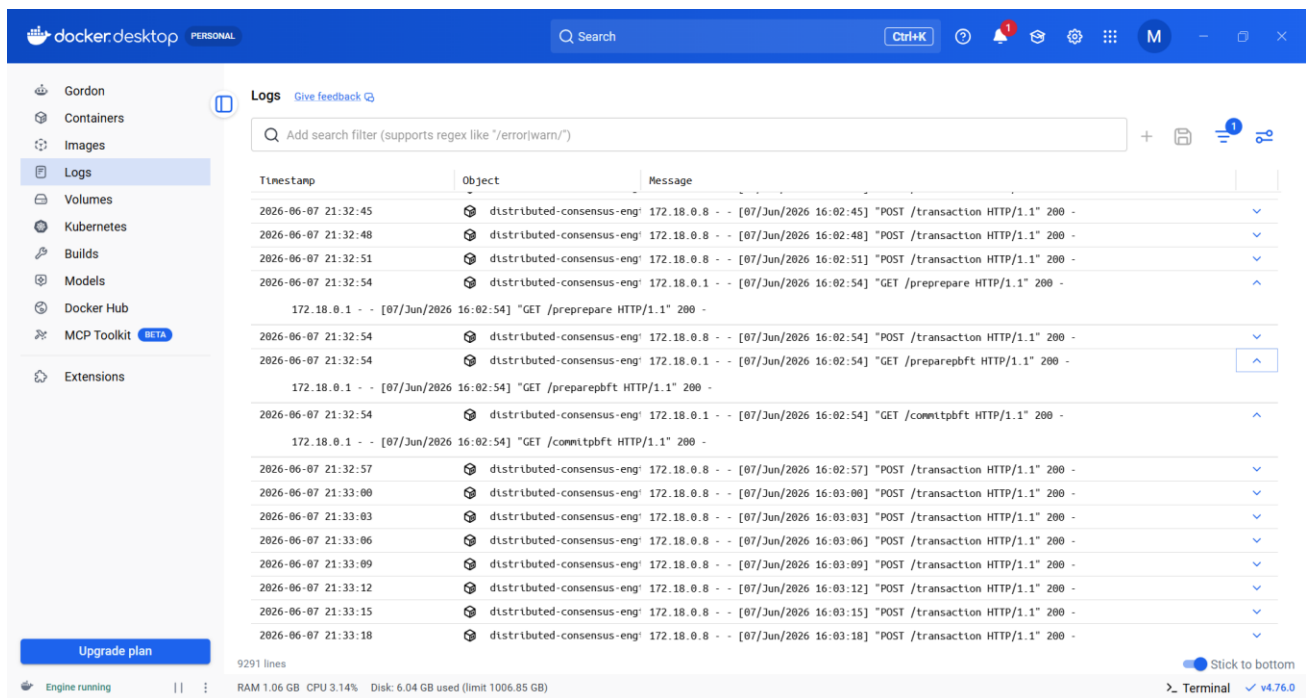

6. Cryptographic Message Authentication

To prevent message spoofing and forgery, RSA-based digital signatures are used.

Each node generates:

- Private Key
- Public Key

Signing Process

1. Sender signs the message using its private key.
2. Receiver verifies the signature using the public key.
3. Invalid signatures are rejected.

Key Distribution

Public keys are shared among all nodes during initialization.

Private keys remain local to each node.

Benefits

- Authentication
- Integrity
- Non-repudiation

Caption: Successful Cryptographic Message Signing

7. Byzantine Adversary Node

Attack Scenarios


Example:

Transaction = TXN001

Transaction = FAKE_TXN

PBFT allows honest nodes to identify and ignore malicious activity.

Caption: Adversary Node Sending Fake Transaction

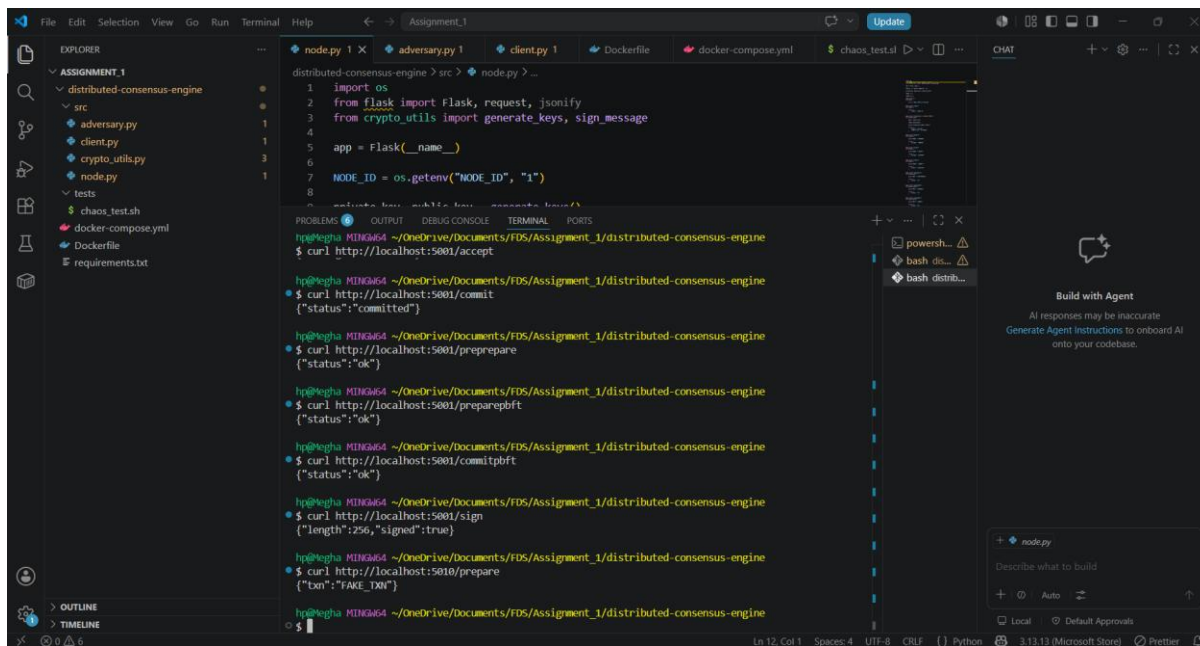

The screenshot shows a VS Code editor with a project named 'Assignment_1'. The Explorer pane on the left shows a directory structure with files like 'distributed-consensus-engine', 'src', 'adversary.py', 'client.py', 'crypto_utils.py', 'node.py', 'tests', 'chaos_test.sh', 'docker-compose.yml', 'Dockerfile', and 'requirements.txt'. The main editor window shows the 'adversary.py' file with the following code:

```
1 import os
2 from flask import Flask, request, jsonify
3 from crypto_utils import generate_keys, sign_message
4
5 app = Flask(__name__)
6
7 NODE_ID = os.getenv("NODE_ID", "1")
8
```

The terminal window at the bottom shows a series of curl commands being executed in a shell. The commands are:

```
hp@heghe MINGW64 ~/OneDrive/Documents/FDS/Assignment_1/distributed-consensus-engine
$ curl http://localhost:5001/accept
{"status": "ok"}

hp@heghe MINGW64 ~/OneDrive/Documents/FDS/Assignment_1/distributed-consensus-engine
$ curl http://localhost:5001/commit
{"status": "ok"}

hp@heghe MINGW64 ~/OneDrive/Documents/FDS/Assignment_1/distributed-consensus-engine
$ curl http://localhost:5001/preprepare
{"status": "ok"}

hp@heghe MINGW64 ~/OneDrive/Documents/FDS/Assignment_1/distributed-consensus-engine
$ curl http://localhost:5001/prepreparepbft
{"status": "ok"}

hp@heghe MINGW64 ~/OneDrive/Documents/FDS/Assignment_1/distributed-consensus-engine
$ curl http://localhost:5001/commitpbft
{"status": "ok"}

hp@heghe MINGW64 ~/OneDrive/Documents/FDS/Assignment_1/distributed-consensus-engine
$ curl http://localhost:5001/sign
{"length": 256, "signed": true}

hp@heghe MINGW64 ~/OneDrive/Documents/FDS/Assignment_1/distributed-consensus-engine
$ curl http://localhost:5001/prepare
{"tx": "FAKE_TXN"}
```

8. Docker-Based Deployment

Docker Compose is used to orchestrate all services.

Containers:

- node1
- node2
- node3
- node4
- node5
- adversary
- client

Advantages:

- Isolation
- Portability
- Reproducibility
- Easy fault injection

The entire cluster can be started using:

`docker compose up --build`

9. Chaos Testing and Failure Recovery

During chaos testing, the current leader node was intentionally stopped. The system successfully reassigned leadership to another active node, ensuring that transaction processing and consensus operations continued without complete service interruption. This demonstrates fault recovery and leader failover capability.

To evaluate resiliency, a chaos testing script was developed.


Test Scenario

1. Node3 is intentionally stopped.
2. Remaining nodes continue operation.
3. Transactions continue to be processed.
4. Node3 is restarted.
5. Cluster returns to normal operation.

Results

The distributed system remained available during node failure and successfully recovered after restart.

Caption: Node3 Stopped During Chaos Test and Restarted Successfully

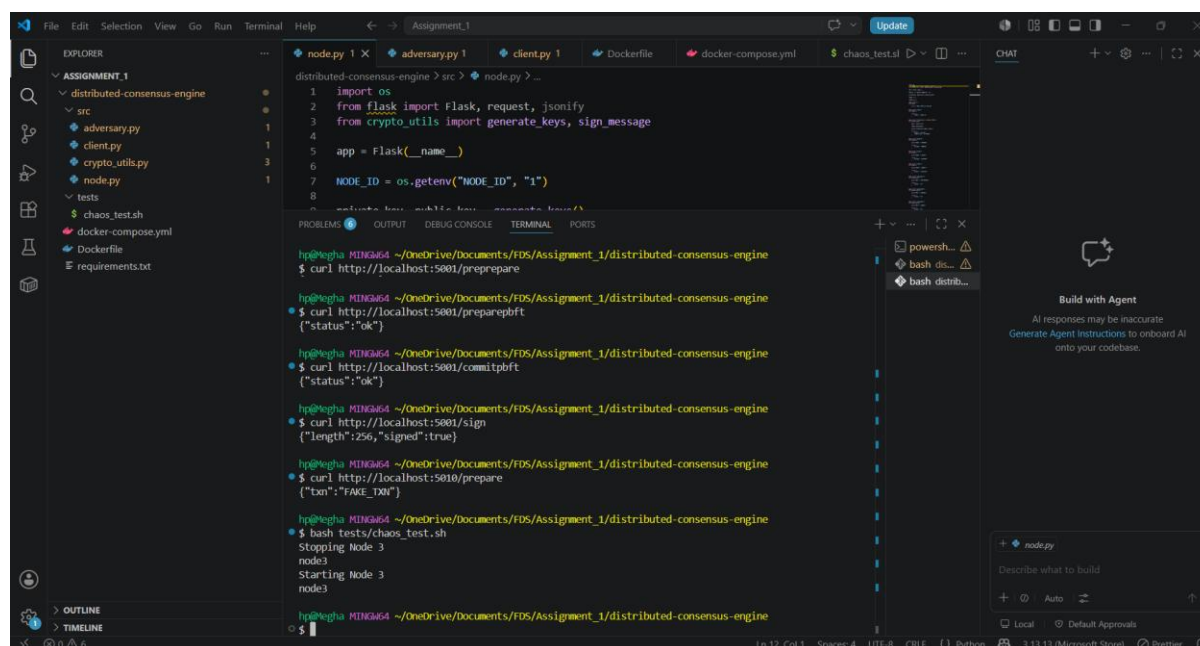

```
distributed-consensus-engine > src > node.py > ...
1 import os
2 from flask import Flask, request, jsonify
3 from crypto_utils import generate_keys, sign_message
4
5 app = Flask(__name__)
6
7 NODE_ID = os.getenv("NODE_ID", "1")
8
9 @app.route('/prepare', methods=['POST'])
10 def prepare():
11     data = request.get_json()
12     if not data or 'tx' not in data:
13         return jsonify({"error": "Invalid request"}), 400
14     tx = data['tx']
15     sig = sign_message(tx.encode(), generate_keys()[1])
16     return jsonify({"tx": tx, "sig": sig}), 200
17
18 if __name__ == '__main__':
19     app.run(host='0.0.0.0', port=5001)
```

```
hp@megha MINGW64 ~/OneDrive/Documents/FDS/Assignment_1/distributed-consensus-engine
$ curl http://localhost:5001/prepare
{"tx": "FAKE_TXN"}

hp@megha MINGW64 ~/OneDrive/Documents/FDS/Assignment_1/distributed-consensus-engine
$ curl http://localhost:5001/preparepbft
{"status": "ok"}

hp@megha MINGW64 ~/OneDrive/Documents/FDS/Assignment_1/distributed-consensus-engine
$ curl http://localhost:5001/commitpbft
{"status": "ok"}


hp@megha MINGW64 ~/OneDrive/Documents/FDS/Assignment_1/distributed-consensus-engine
$ curl http://localhost:5001/sign
{"length": 256, "signed": true}

hp@megha MINGW64 ~/OneDrive/Documents/FDS/Assignment_1/distributed-consensus-engine
$ curl http://localhost:5001/prepare
{"tx": "FAKE_TXN"}

hp@megha MINGW64 ~/OneDrive/Documents/FDS/Assignment_1/distributed-consensus-engine
$ bash tests/chaos_test.sh
Stopping Node 3
Starting Node 3
node3

hp@megha MINGW64 ~/OneDrive/Documents/FDS/Assignment_1/distributed-consensus-engine
$
```

Caption: Continuous Transaction Processing During Failure

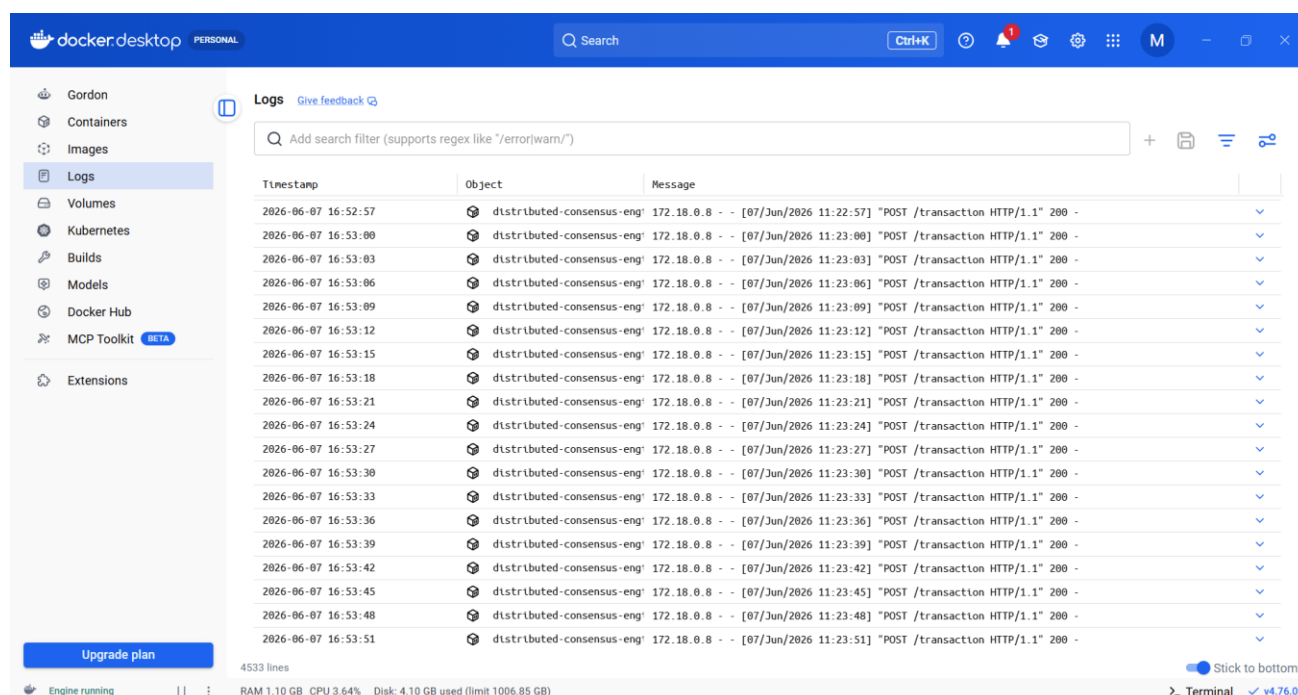

10. Experimental Observations

Observed Characteristics:

Feature	Observation
Leader Election	Successfully reassigned leadership after failure simulation
Paxos	Achieved majority-based agreement
PBFT	Detected Byzantine behavior
Cryptography	Verified message authenticity
Docker Deployment	Stable container execution
Chaos Testing	Recovered from node failures

The implementation successfully demonstrated crash fault tolerance and Byzantine fault tolerance in a containerized distributed environment.

11. Video Demonstration Link

Video Link:

https://drive.google.com/file/d/18sK3tvSHSY4BE5O3D_BiXMfhh2Y_hgRQ/view?usp=sharing

The video demonstrates:

1. Docker Compose Build
 2. Normal Transaction Processing
 3. Paxos Execution
 4. PBFT Execution
 5. Byzantine Adversary Demonstration
 6. Chaos Testing and Recovery
-

12. Conclusion

This project implemented a resilient distributed state machine replication system capable of handling both crash faults and Byzantine faults.

Leader election provided stable coordination among nodes, Paxos ensured consensus during crash failures, and PBFT protected the system against malicious participants. Cryptographic signatures enhanced message authenticity, while Docker based deployment enabled efficient orchestration and testing.

The system successfully demonstrated reliable transaction processing, fault tolerance, and recovery capabilities in a distributed environment.