

Enterprise Data Dictionary — Veridian Unified Data Platform

Document Reference: VCH-PC-2026-DD | Author: Samuel Enyi (Lead Database Architect)


PROJECT CONCORD: VERIDIAN UNIFIED DATA PLATFORM

Master Enterprise Data Dictionary (All 43 Entities)

Document Reference: VCH-PC-2026-DD
Version: 1.0 (Final Enterprise Release)
Author: Samuel Enyi (Lead Database Architect & SQL Engineer)
Database Engine: PostgreSQL 15 (Supabase Managed Engine)
Target Defense Date: Friday, 14 August 2026 @ 9:00 AM Prompt

1. Executive Overview & Schema Organization

The **Veridian Unified Data Platform** follows a **Core Hub & Divisional Modules** architecture. The platform consists of **6 distinct logical schemas** housing **43 primary operational entities** (and associated analytical views):

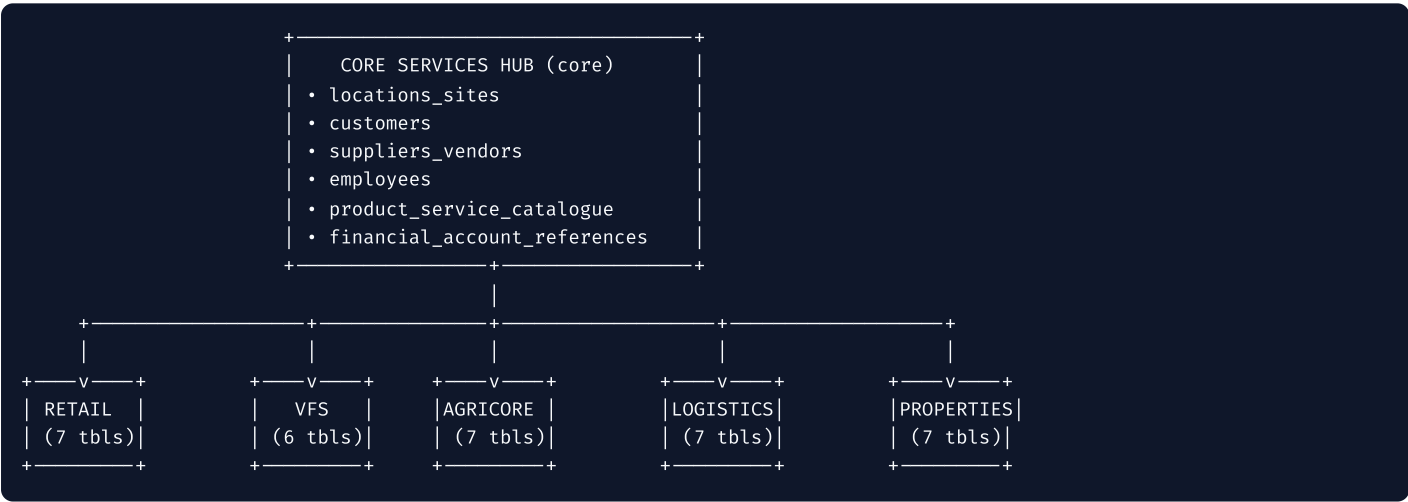

2. Core Services Hub (core Schema — 6 Shared Entities)

2.1 core.locations_sites

- Purpose:** Single source of truth for all physical and operational sites across Nigeria (NG), Ghana (GH), and Kenya (KE).
- Referenced By:** retail.stores , agricore.farms , agricore.processing_runs , logistics.shipments , logistics.routes , logistics.warehouses , properties.properties .

Column Name	Data Type	Constraints	Description / Business Rules
location_id	VARCHAR(30)	PRIMARY KEY	Unique location identifier (e.g., LOC-NG-LOS-001).
site_name	VARCHAR(150)	NOT NULL	Descriptive name of the site (e.g., Ikeja Hypermarket Premises).
site_type	VARCHAR(50)	NOT NULL , CHECK	Type of facility: 'STORE' , 'WAREHOUSE' , 'FARM' , 'PROPERTY' , 'OFFICE' .
address	TEXT	NOT NULL	Physical street address.
city	VARCHAR(100)	NOT NULL	City or municipality (e.g., Lagos , Kano , Accra).
country_code	VARCHAR(5)	NOT NULL , CHECK	ISO 2-letter country code: 'NG' , 'GH' , 'KE' .
latitude	DECIMAL(9,6)	Nullable	Geolocation latitude coordinate.
longitude	DECIMAL(9,6)	Nullable	Geolocation longitude coordinate.
created_at	TIMESTAMPTZ	DEFAULT NOW()	Record creation timestamp.

2.2 core.customers

- **Purpose:** Unified identity master for all individual customers interacting with Meridian Retail and Veridian Financial Services.
- **Referenced By:** retail.pos_transactions , retail.loyalty_accounts , vfs.wallet_accounts , vfs.loans , vfs.kyc_records , core.financial_account_references .

Column Name	Data Type	Constraints	Description / Business Rules
customer_id	VARCHAR(30)	PRIMARY KEY	Global customer ID (e.g., CUST-100452).
full_name	VARCHAR(150)	NOT NULL	Legal full name of the individual customer.
date_of_birth	DATE	NOT NULL	Date of birth for KYC and age verification.
primary_contact	VARCHAR(50)	NOT NULL	Phone number or primary email address.
registered_country	VARCHAR(5)	NOT NULL , CHECK	Registration country: 'NG' , 'GH' , 'KE' .
consent_retail_loyalty	BOOLEAN	DEFAULT TRUE	Consent flag for retail marketing & loyalty program.
consent_vfs_credit_sharing	BOOLEAN	DEFAULT FALSE	Consent flag permitting VFS credit assessment access.
created_date	TIMESTAMPTZ	DEFAULT NOW()	Customer registration timestamp.

2.3 core.suppliers_vendors

- **Purpose:** Shared master registry for external suppliers, vendor partners, and AgriCore smallholder farmers.
- **Referenced By:** agricore.farmers , agricore.farms , retail.supplier_deliveries , vfs.loans .

Column Name	Data Type	Constraints	Description / Business Rules
supplier_id	VARCHAR(30)	PRIMARY KEY	Global supplier identifier (e.g., SUPP-AGRI-0012).
legal_name	VARCHAR(150)	NOT NULL	Legal business name or farmer full name.
supplier_type	VARCHAR(50)	NOT NULL , CHECK	Classification: 'FARMER' , 'WHOLESALE_VENDOR' , 'SERVICE_PROVIDER' .
primary_division_id	VARCHAR(30)	NOT NULL , CHECK	Primary division relationship: 'AGRICORE' , 'RETAIL' , 'LOGISTICS' , 'VFS' , 'PROPERTIES' .
onboarding_date	DATE	NOT NULL	Date supplier was onboarded.
status	VARCHAR(30)	DEFAULT 'ACTIVE' , CHECK	Account status: 'ACTIVE' , 'SUSPENDED' , 'INACTIVE' .

2.4 core.employees

- **Purpose:** Group-wide employee registry across all 5 operating divisions and executive leadership.
- **Referenced By:** retail.stores (manager), agricore.harvest_batches (agent), agricore.quality_grades (inspector), logistics.drivers (driver employee).

Column Name	Data Type	Constraints	Description / Business Rules
employee_id	VARCHAR(30)	PRIMARY KEY	Unique staff ID (e.g., EMP-10023).
full_name	VARCHAR(150)	NOT NULL	Employee full name.
division_id	VARCHAR(30)	NOT NULL , CHECK	Operating division: 'RETAIL' , 'LOGISTICS' , 'AGRICORE' , 'VFS' , 'PROPERTIES' , 'EXECUTIVE' .
role_title	VARCHAR(100)	NOT NULL	Job designation (e.g., Store Manager , Field Agent).
employment_status	VARCHAR(30)	DEFAULT 'ACTIVE' , CHECK	Status: 'ACTIVE' , 'ON_LEAVE' , 'TERMINATED' .
hire_date	DATE	NOT NULL	Official date of employment.
reports_to	VARCHAR(30)	FK → core.employees	Manager's employee ID (Self-referential hierarchy).

2.5 core.product_service_catalogue

- **Purpose:** Master product and service master list sold through Meridian Retail or produced by AgriCore.
- **Referenced By:** retail.transaction_line_items , retail.inventory_stock_levels , retail.promotions , agricore.harvest_batches .

Column Name	Data Type	Constraints	Description / Business Rules
product_id	VARCHAR(30)	PRIMARY KEY	Unique product SKU code (e.g., PROD-GRN-001).
product_name	VARCHAR(150)	NOT NULL	Commercial name (e.g., Yellow Maize Grain 50kg).
category	VARCHAR(50)	NOT NULL , CHECK	Category: 'FRESH_PRODUCE' , 'GRAINS' , 'PACKAGED_GOODS' , 'BEVERAGES' , 'SERVICES' .
unit_of_measure	VARCHAR(20)	NOT NULL , CHECK	Standard unit: 'KG' , 'TON' , 'BAG' , 'CARTON' , 'LITRE' , 'UNIT' .
primary_division_id	VARCHAR(30)	NOT NULL , CHECK	Originating division: 'AGRICORE' , 'RETAIL' .
is_active	BOOLEAN	DEFAULT TRUE	Active sellable status.

2.6 core.financial_account_references

- **Purpose:** Controlled, non-sensitive reference linking customers and suppliers to VFS financial product records without exposing banking details.
- **Referenced By:** vfs.wallet_accounts .

Column Name	Data Type	Constraints	Description / Business Rules
account_ref_id	VARCHAR(30)	PRIMARY KEY	Reference code (e.g., FAR-WLT-90021).
customer_id	VARCHAR(30)	NOT NULL , FK → core.customers	Link to customer identity.
account_type	VARCHAR(30)	NOT NULL , CHECK	Product type: 'SAVINGS' , 'WALLET' , 'LOAN' .
account_status	VARCHAR(30)	DEFAULT 'ACTIVE' , CHECK	Status: 'ACTIVE' , 'DORMANT' , 'CLOSED' .
opened_date	DATE	NOT NULL	Account opening date.

3. Meridian Retail & Consumer Module (retail Schema — 7 Entities)

3.1 retail.stores

Column Name	Data Type	Constraints	Description
store_id	VARCHAR(30)	PRIMARY KEY	Unique branch identifier (e.g., STR-LOS-01).
location_id	VARCHAR(30)	NOT NULL , FK → core.locations_sites	Physical site mapping.
store_format	VARCHAR(50)	NOT NULL , CHECK	'HYPERMARKET' , 'SUPERMARKET' , 'EXPRESS' , 'ONLINE_FULFILLMENT' .
opening_date	DATE	NOT NULL	Branch opening date.
manager_employee_id	VARCHAR(30)	FK → core.employees	Assigned store manager.
property_id	VARCHAR(30)	FK → properties.properties	Premises lease mapping.

3.2 retail.pos_transactions

Column Name	Data Type	Constraints	Description
transaction_id	VARCHAR(40)	PRIMARY KEY	Point-of-sale receipt ID.
store_id	VARCHAR(30)	NOT NULL , FK → retail.stores	Store where transaction occurred.
customer_id	VARCHAR(30)	FK → core.customers	Transacting customer (if loyalty/identified).
transaction_date	TIMESTAMPZ	NOT NULL , DEFAULT NOW()	Date and time of sale.
total_amount	DECIMAL(18,2)	NOT NULL , CHECK (> 0)	Total bill value in local currency (NGN).
payment_method	VARCHAR(30)	NOT NULL , CHECK	'CASH' , 'VFS_WALLET' , 'DEBIT_CARD' , 'POS' .

3.3 retail.transaction_line_items

Column Name	Data Type	Constraints	Description
line_item_id	VARCHAR(40)	PRIMARY KEY	Unique line item UUID/ID.
transaction_id	VARCHAR(40)	NOT NULL , FK → retail.pos_transactions	Header transaction reference.
product_id	VARCHAR(30)	NOT NULL , FK → core.product_service_catalogue	Product purchased.
quantity	INT	NOT NULL , CHECK (> 0)	Units purchased.
unit_price	DECIMAL(18,2)	NOT NULL , CHECK (> 0)	Unit selling price.

3.4 retail.inventory_stock_levels

Column Name	Data Type	Constraints	Description
stock_id	VARCHAR(40)	PRIMARY KEY	Stock record ID.
store_id	VARCHAR(30)	NOT NULL , FK → retail.stores	Store location.
product_id	VARCHAR(30)	NOT NULL , FK → core.product_service_catalogue	Product SKU.
quantity_on_hand	INT	NOT NULL , CHECK (≥ 0)	Current stock count.
last_counted_date	TIMESTAMPZ	DEFAULT NOW()	Last physical audit date.

3.5 retail.promotions

Column Name	Data Type	Constraints	Description
promotion_id	VARCHAR(30)	PRIMARY KEY	Promo code ID.
product_id	VARCHAR(30)	NOT NULL , FK → core.product_service_catalogue	Discounted product.
discount_type	VARCHAR(30)	NOT NULL , CHECK	'PERCENTAGE' , 'FIXED_AMOUNT' , 'BUY_1_GET_1' .
discount_value	DECIMAL(18,2)	NOT NULL , CHECK (> 0)	Discount rate/amount.
start_date	DATE	NOT NULL	Promo start date.
end_date	DATE	NOT NULL , CHECK (end_date ≥ start_date)	Promo end date.

3.6 retail.loyalty_accounts

Column Name	Data Type	Constraints	Description
loyalty_id	VARCHAR(30)	PRIMARY KEY	Loyalty card ID.
customer_id	VARCHAR(30)	NOT NULL , FK → core.customers	Member customer ID.
tier	VARCHAR(20)	DEFAULT 'BRONZE' , CHECK	'BRONZE' , 'SILVER' , 'GOLD' , 'PLATINUM' .
points_balance	INT	DEFAULT 0 , CHECK (≥ 0)	Accumulated reward points.
enrolment_date	DATE	NOT NULL , DEFAULT CURRENT_DATE	Date joined loyalty program.

3.7 retail.supplier_deliveries

Column Name	Data Type	Constraints	Description
delivery_id	VARCHAR(40)	PRIMARY KEY	Inbound delivery manifest ID.
supplier_id	VARCHAR(30)	NOT NULL , FK → core.suppliers_vendors	Supplier (AgriCore or Wholesale).
store_id	VARCHAR(30)	NOT NULL , FK → retail.stores	Destination retail store.
expected_date	DATE	NOT NULL	Scheduled delivery date.
received_date	DATE	Nullable	Actual receipt date.
status	VARCHAR(30)	DEFAULT 'SCHEDULED' , CHECK	'SCHEDULED' , 'RECEIVED' , 'DELAYED' , 'SHORTFALL' , 'CANCELLED' .

4. Veridian Financial Services Module (vfs Schema — 6 Entities)

4.1 vfs.wallet_accounts

Column Name	Data Type	Constraints	Description
wallet_id	VARCHAR(30)	PRIMARY KEY	Digital wallet account ID.
customer_id	VARCHAR(30)	NOT NULL , FK → core.customers	Wallet holder.
account_ref_id	VARCHAR(30)	FK → core.financial_account_references	Core hub account ref.
balance	DECIMAL(18,2)	DEFAULT 0.00 , CHECK (≥ 0)	Current wallet funds (NGN).
status	VARCHAR(30)	DEFAULT 'ACTIVE' , CHECK	'ACTIVE' , 'BLOCKED' , 'SUSPENDED' .

4.2 vfs.wallet_transactions

Column Name	Data Type	Constraints	Description
wallet_txn_id	VARCHAR(40)	PRIMARY KEY	Transaction ledger entry ID.
wallet_id	VARCHAR(30)	NOT NULL , FK → vfs.wallet_accounts	Source wallet.
counterparty_type	VARCHAR(50)	NOT NULL , CHECK	'MERIDIAN_RETAIL_POS' , 'AGRICORE_PAYOUT' , 'TRANSFER' , 'DEPOSIT' , 'WITHDRAWAL' .
amount	DECIMAL(18,2)	NOT NULL , CHECK (> 0)	Transaction value.
transaction_date	TIMESTAMPZ	DEFAULT NOW()	Execution timestamp.

4.3 vfs.loans

Column Name	Data Type	Constraints	Description
loan_id	VARCHAR(30)	PRIMARY KEY	Unique credit facility ID.
borrower_customer_id	VARCHAR(30)	FK → core.customers	Borrower (if individual customer).
borrower_supplier_id	VARCHAR(30)	FK → core.suppliers_vendors	Borrower (if farmer/supplier).
principal_amount	DECIMAL(18,2)	NOT NULL , CHECK (> 0)	Approved principal loan amount.
interest_rate	DECIMAL(5,2)	NOT NULL , CHECK (> 0)	Annual percentage interest rate.
status	VARCHAR(30)	DEFAULT 'ACTIVE' , CHECK	'APPLIED' , 'DISBURSED' , 'ACTIVE' , 'PAID_OFF' , 'DEFAULTED' .

4.4 vfs.loan_repayments

Column Name	Data Type	Constraints	Description
repayment_id	VARCHAR(40)	PRIMARY KEY	Repayment schedule entry ID.
loan_id	VARCHAR(30)	NOT NULL , FK → vfs.loans	Master loan ID.
due_date	DATE	NOT NULL	Scheduled repayment date.
amount_due	DECIMAL(18,2)	NOT NULL , CHECK (> 0)	Required installment amount.
paid_amount	DECIMAL(18,2)	DEFAULT 0.00 , CHECK (≥ 0)	Actual amount paid.
paid_date	DATE	Nullable	Payment receipt date.

4.5 vfs.kyc_records

Column Name	Data Type	Constraints	Description
kyc_id	VARCHAR(30)	PRIMARY KEY	Compliance verification ID.
customer_id	VARCHAR(30)	NOT NULL , FK → core.customers	Customer verified.
verification_level	VARCHAR(20)	NOT NULL , CHECK	Regulatory tier: 'TIER_1' , 'TIER_2' , 'TIER_3' .
verified_date	DATE	NOT NULL , DEFAULT CURRENT_DATE	Approval date.

4.6 vfs.merchant_settlements

Column Name	Data Type	Constraints	Description
settlement_id	VARCHAR(40)	PRIMARY KEY	Daily/weekly settlement batch ID.
division_id	VARCHAR(30)	NOT NULL , CHECK	Recipient division: 'RETAIL' , 'LOGISTICS' , 'AGRICORE' .
settlement_date	DATE	NOT NULL	Settlement date.
total_amount	DECIMAL(18,2)	NOT NULL , CHECK (> 0)	Total net payout amount.

5. AgriCore Agribusiness Module (agricore Schema — 7 Entities)

5.1 agricore.farms

Column Name	Data Type	Constraints	Description
farm_id	VARCHAR(30)	PRIMARY KEY	Farm plot ID (e.g., FRM-KAD-001).
supplier_id	VARCHAR(30)	NOT NULL , FK → core.suppliers_vendors	Registered farmer/owner ID.
location_id	VARCHAR(30)	NOT NULL , FK → core.locations_sites	Geographical location mapping.
size_hectares	DECIMAL(8,2)	NOT NULL , CHECK (> 0)	Plot area in hectares.
primary_crop	VARCHAR(50)	NOT NULL	Dominant crop (e.g., Maize , Plantain , Cowpea).

5.2 agricore.farmers

Column Name	Data Type	Constraints	Description
farmer_id	VARCHAR(30)	PRIMARY KEY	Farmer profile ID.
supplier_id	VARCHAR(30)	NOT NULL , FK → core.suppliers_vendors	Shared supplier core entity.
registration_date	DATE	NOT NULL	Date registered with AgriCore.
cooperative_name	VARCHAR(150)	Nullable	Farmer cooperative association name.

5.3 agricore.harvest_batches

Column Name	Data Type	Constraints	Description
harvest_id	VARCHAR(30)	PRIMARY KEY	Harvest batch collection ID.
farm_id	VARCHAR(30)	NOT NULL , FK → agricore.farms	Source farm.
product_id	VARCHAR(30)	NOT NULL , FK → core.product_service_catalogue	Harvested commodity SKU.
harvest_date	DATE	NOT NULL	Collection date.
volume_kg	DECIMAL(12,2)	NOT NULL , CHECK (> 0)	Gross harvested volume (kg).
field_agent_employee_id	VARCHAR(30)	FK → core.employees	AgriCore field collection agent.

5.4 `agricore.processing_runs`

Column Name	Data Type	Constraints	Description
<code>run_id</code>	<code>VARCHAR(30)</code>	PRIMARY KEY	Facility processing batch ID.
<code>harvest_id</code>	<code>VARCHAR(30)</code>	NOT NULL , FK → <code>agricore.harvest_batches</code>	Input harvest batch.
<code>facility_location_id</code>	<code>VARCHAR(30)</code>	NOT NULL , FK → <code>core.locations_sites</code>	Processing plant location.
<code>run_date</code>	<code>DATE</code>	NOT NULL	Processing date.
<code>output_volume_kg</code>	<code>DECIMAL(12,2)</code>	NOT NULL , CHECK (≥ 0)	Net processed output (kg).

5.5 `agricore.quality_grades`

Column Name	Data Type	Constraints	Description
<code>grade_id</code>	<code>VARCHAR(30)</code>	PRIMARY KEY	Quality inspection record ID.
<code>run_id</code>	<code>VARCHAR(30)</code>	NOT NULL , FK → <code>agricore.processing_runs</code>	Processing run inspected.
<code>grade_level</code>	<code>VARCHAR(20)</code>	NOT NULL , CHECK	Quality grade: 'GRADE_A' , 'GRADE_B' , 'GRADE_C' , 'REJECTED' .
<code>moisture_content</code>	<code>DECIMAL(5,2)</code>	Nullable	Moisture percentage measure.
<code>inspector_employee_id</code>	<code>VARCHAR(30)</code>	FK → <code>core.employees</code>	QA inspector employee ID.

5.6 `agricore.wholesale_shipments`

Column Name	Data Type	Constraints	Description
<code>wholesale_id</code>	<code>VARCHAR(30)</code>	PRIMARY KEY	Wholesale dispatch ID.
<code>run_id</code>	<code>VARCHAR(30)</code>	NOT NULL , FK → <code>agricore.processing_runs</code>	Source processed batch.
<code>destination_type</code>	<code>VARCHAR(30)</code>	NOT NULL , CHECK	'MERIDIAN_RETAIL_STORE' , 'THIRD_PARTY_CLIENT' .
<code>destination_id</code>	<code>VARCHAR(30)</code>	NOT NULL	Target store/client ID.
<code>shipment_id</code>	<code>VARCHAR(40)</code>	FK → <code>logistics.shipments</code>	Transport shipment link.

5.7 `agricore.farmer_loans_reference`

Column Name	Data Type	Constraints	Description
<code>reference_id</code>	<code>VARCHAR(30)</code>	PRIMARY KEY	Cross-divisional reference ID.
<code>farmer_id</code>	<code>VARCHAR(30)</code>	NOT NULL , FK → <code>agricore.farmers</code>	AgriCore farmer ID.
<code>loan_id</code>	<code>VARCHAR(30)</code>	NOT NULL , FK → <code>vfs.loans</code>	VFS loan ID.
<code>visible_summary_status</code>	<code>VARCHAR(50)</code>	NOT NULL	Consent-filtered loan summary status.

6. Concord Logistics Module (`logistics` Schema — 7 Entities)

6.1 `logistics.vehicles`

Column Name	Data Type	Constraints	Description
<code>vehicle_id</code>	<code>VARCHAR(30)</code>	PRIMARY KEY	Fleet vehicle ID (e.g., <code>VEH-TRK-012</code>).
<code>registration_number</code>	<code>VARCHAR(30)</code>	UNIQUE , NOT NULL	Official license plate number.
<code>vehicle_type</code>	<code>VARCHAR(50)</code>	NOT NULL , CHECK	'LAST_MILE_VAN' , 'HAULAGE_TRUCK' , 'REFRIGERATED_TRUCK' .
<code>capacity_kg</code>	<code>INT</code>	NOT NULL , CHECK (> 0)	Payload weight limit (kg).
<code>status</code>	<code>VARCHAR(30)</code>	DEFAULT 'AVAILABLE' , CHECK	Fleet status: 'AVAILABLE' , 'IN_TRANSIT' , 'MAINTENANCE' .

6.2 `logistics.drivers`

Column Name	Data Type	Constraints	Description
<code>driver_id</code>	<code>VARCHAR(30)</code>	PRIMARY KEY	Driver profile ID.
<code>employee_id</code>	<code>VARCHAR(30)</code>	NOT NULL , FK → <code>core.employees</code>	Driver employee record.
<code>licence_number</code>	<code>VARCHAR(50)</code>	UNIQUE , NOT NULL	Commercial driver license number.
<code>licence_expiry</code>	<code>DATE</code>	NOT NULL	Driver license expiration date.

6.3 `logistics.shipments`

Column Name	Data Type	Constraints	Description
<code>shipment_id</code>	<code>VARCHAR(40)</code>	PRIMARY KEY	Master freight shipment ID.
<code>origin_location_id</code>	<code>VARCHAR(30)</code>	NOT NULL , FK → <code>core.locations_sites</code>	Pickup location.
<code>destination_location_id</code>	<code>VARCHAR(30)</code>	NOT NULL , FK → <code>core.locations_sites</code>	Drop-off location.
<code>client_type</code>	<code>VARCHAR(50)</code>	NOT NULL , CHECK	'INTERNAL_AGRICORE' , 'INTERNAL_RETAIL' , 'THIRD_PARTY_COMMERCIAL' .
<code>status</code>	<code>VARCHAR(30)</code>	DEFAULT 'SCHEDULED' , CHECK	'SCHEDULED' , 'IN_TRANSIT' , 'DELIVERED' , 'DELAYED' , 'CANCELLED' .

6.4 `logistics.shipment_legs`

Column Name	Data Type	Constraints	Description
<code>leg_id</code>	<code>VARCHAR(40)</code>	PRIMARY KEY	Multi-leg route segment ID.
<code>shipment_id</code>	<code>VARCHAR(40)</code>	NOT NULL , FK → <code>logistics.shipments</code>	Master shipment ID.
<code>vehicle_id</code>	<code>VARCHAR(30)</code>	NOT NULL , FK → <code>logistics.vehicles</code>	Assigned vehicle.
<code>driver_id</code>	<code>VARCHAR(30)</code>	NOT NULL , FK → <code>logistics.drivers</code>	Assigned driver.
<code>departure_time</code>	<code>TIMESTAMP TZ</code>	Nullable	Actual departure timestamp.
<code>arrival_time</code>	<code>TIMESTAMP TZ</code>	Nullable	Actual arrival timestamp.

6.5 logistics.routes

Column Name	Data Type	Constraints	Description
route_id	VARCHAR(30)	PRIMARY KEY	Standard transit corridor ID.
route_name	VARCHAR(150)	NOT NULL	Corridor name (e.g., Kano to Lagos Haulage).
origin_location_id	VARCHAR(30)	NOT NULL , FK → core.locations_sites	Origin site.
destination_location_id	VARCHAR(30)	NOT NULL , FK → core.locations_sites	Destination site.
distance_km	DECIMAL(8,2)	NOT NULL , CHECK (> 0)	Route distance in kilometers.

6.6 logistics.warehouses

Column Name	Data Type	Constraints	Description
warehouse_id	VARCHAR(30)	PRIMARY KEY	Logistics depot ID.
location_id	VARCHAR(30)	NOT NULL , FK → core.locations_sites	Physical location ID.
capacity_units	INT	NOT NULL , CHECK (> 0)	Pallet/unit storage capacity.
leased_from_property_id	VARCHAR(30)	FK → properties.properties	Veridian Properties lease reference.

6.7 logistics.maintenance_logs

Column Name	Data Type	Constraints	Description
maintenance_id	VARCHAR(40)	PRIMARY KEY	Fleet repair log entry ID.
vehicle_id	VARCHAR(30)	NOT NULL , FK → logistics.vehicles	Serviced vehicle.
service_date	DATE	NOT NULL	Maintenance date.
cost	DECIMAL(18,2)	NOT NULL , CHECK (≥ 0)	Repair cost in NGN.
description	TEXT	Nullable	Maintenance work summary.

7. Veridian Properties Module (properties Schema — 7 Entities)

7.1 properties.properties

Column Name	Data Type	Constraints	Description
property_id	VARCHAR(30)	PRIMARY KEY	Real estate asset ID (e.g., PROP-LOS-004).
location_id	VARCHAR(30)	NOT NULL , FK → core.locations_sites	Site location mapping.
property_type	VARCHAR(50)	NOT NULL , CHECK	'RETAIL_STORE_PREMISES' , 'LOGISTICS_WAREHOUSE' , 'AGRI_FACILITY' , 'COMMERCIAL_OFFICE' .
size_sqm	DECIMAL(10,2)	NOT NULL , CHECK (> 0)	Total floor area in square meters.
ownership_status	VARCHAR(30)	NOT NULL , CHECK	'OWNED_FREEHOLD' , 'LEASED_FROM_LANDLORD' .

7.2 properties.tenants

Column Name	Data Type	Constraints	Description
tenant_id	VARCHAR(30)	PRIMARY KEY	Occupant tenant ID.
tenant_type	VARCHAR(30)	NOT NULL , CHECK	'INTERNAL_DIVISION' , 'EXTERNAL_COMMERCIAL_TENANT' .
division_id	VARCHAR(30)	Nullable, CHECK	Internal division: 'RETAIL' , 'LOGISTICS' , 'AGRICORE' , 'VFS' .
external_tenant_name	VARCHAR(150)	Nullable	Commercial client company name.

7.3 properties.leases

Column Name	Data Type	Constraints	Description
lease_id	VARCHAR(30)	PRIMARY KEY	Property lease contract ID.
property_id	VARCHAR(30)	NOT NULL , FK → properties.properties	Leased property asset.
tenant_id	VARCHAR(30)	NOT NULL , FK → properties.tenants	Tenant contract holder.
start_date	DATE	NOT NULL	Lease commencement date.
end_date	DATE	NOT NULL	Lease expiration date (CHECK end_date > start_date).
monthly_rent	DECIMAL(18,2)	NOT NULL , CHECK (> 0)	Monthly rental fee in NGN.

7.4 properties.maintenance_requests

Column Name	Data Type	Constraints	Description
request_id	VARCHAR(40)	PRIMARY KEY	Property defect/repair request ID.
property_id	VARCHAR(30)	NOT NULL , FK → properties.properties	Target property asset.
requested_date	DATE	NOT NULL , DEFAULT CURRENT_DATE	Date ticket opened.
category	VARCHAR(50)	NOT NULL	Defect category (e.g., Roofing , HVAC , Electrical).
status	VARCHAR(30)	DEFAULT 'OPEN' , CHECK	'OPEN' , 'IN_PROGRESS' , 'RESOLVED' .
resolved_date	DATE	Nullable	Ticket resolution date.

7.5 properties.property_valuations

Column Name	Data Type	Constraints	Description
valuation_id	VARCHAR(40)	PRIMARY KEY	Portfolio audit valuation ID.
property_id	VARCHAR(30)	NOT NULL , FK → properties.properties	Valued asset ID.
valuation_date	DATE	NOT NULL	Valuation audit date.
assessed_value	DECIMAL(18,2)	NOT NULL , CHECK (> 0)	Assessed market value in NGN.

7.6 properties.utility_accounts

Column Name	Data Type	Constraints	Description
utility_id	VARCHAR(30)	PRIMARY KEY	Utility account mapping ID.
property_id	VARCHAR(30)	NOT NULL , FK → properties.properties	Property premises.
utility_type	VARCHAR(30)	NOT NULL , CHECK	'ELECTRICITY' , 'WATER' , 'WASTE_MANAGEMENT' .
provider_name	VARCHAR(100)	NOT NULL	Utility provider name (e.g., IKEDC , LWC).
account_number	VARCHAR(50)	NOT NULL	Meter / account number.

7.7 properties.facility_assets

Column Name	Data Type	Constraints	Description
asset_id	VARCHAR(40)	PRIMARY KEY	Capital equipment ID.
property_id	VARCHAR(30)	NOT NULL , FK → properties.properties	Property location.
asset_type	VARCHAR(50)	NOT NULL	Asset classification (e.g., Generator 500kVA , Chiller Unit).
installed_date	DATE	NOT NULL	Installation date.
condition_rating	VARCHAR(30)	CHECK	Condition: 'EXCELLENT' , 'GOOD' , 'FAIR' , 'NEEDS_REPLACEMENT' .

8. Summary of Key Analytical Views Exposed for BI

View Name	Schema	Base Tables Joined	Key Purpose / Scenario Addressed
v_agricore_retail_supply_alert	public	retail.supplier_deliveries , agricore.harvest_batches , core.product_service_catalogue , retail.stores	Scenario 1 (Ngozi): Provides store managers advance supply shortfall warnings.
v_farmer_credit_assessment	public	agricore.farmers , agricore.harvest_batches , vfs.loans , core.customers , core.suppliers_vendors	Scenario 2 (Chinedu): Consent-based multi-year farmer harvest history for credit scoring.
v_logistics_warehouse_leases	public	logistics.warehouses , properties.properties , properties.leases , properties.tenants	Scenario 3 (Funmi): Real-time warehouse lease status and double-billing prevention.
v_consolidated_group_revenue	public	retail.pos_transactions , logistics.shipments , vfs.wallet_transactions , agricore.wholesale_shipments , properties.leases	Scenario 4 (Adaeze): Same-day cross-divisional revenue consolidation for executive oversight.

Architected and Structured by Samuel Enyi, Lead Database Architect & SQL Engineer.