
Amazon Lex creates a runtime role with permission to upload to Amazon CloudWatch Logs. AWSServiceRoleForLexV2Bots_OEFJR6MT7OR Children's Online Privacy Protection Act (COPPA) Info Is use of your bot subject to the Children's Online Privacy Protection Act (COPPA) [2]? Yes O No Idle session timeout You can configure how long a session is maintained when the user does not provide any input and the session is idle. Amazon Lex retains context information until a session ends. Session timeout minute(s) 5 ₩ By default, session duration is 5 minutes, but you can specify any duration between 1 and 1440 minutes (24 hours).

► Advanced settings - optional Info

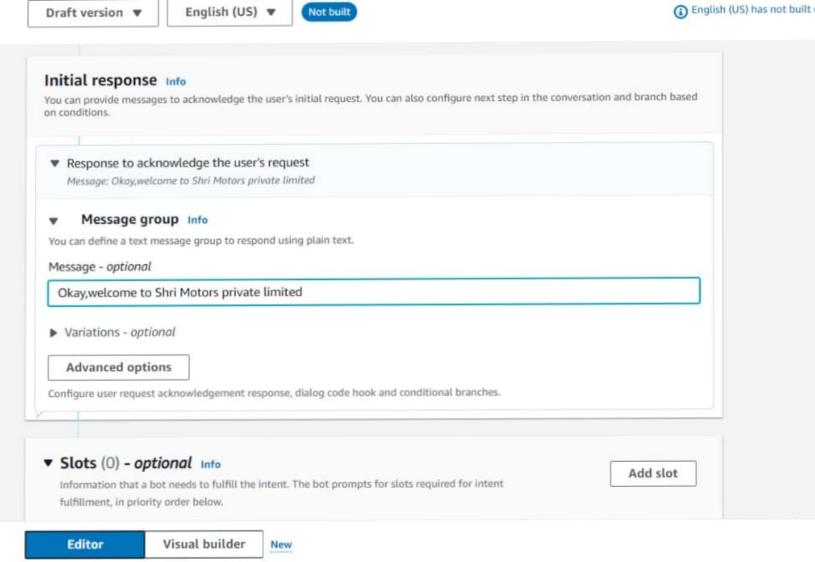

ntime role with permission to upload to Amazon CloudWatch Logs.
LexV2Bots_0EFJR6MT7OR
ne Privacy Protection Act (COPPA) Info
ject to the Children's Online Privacy Protection Act (COPPA) ?

Runtime role

Session timeout

Configure bot settings Info

Creation method

Create a blank bot

Create a basic bot with no preconfigured languages, intents, and slot types. Start with an example

An example bot has preconfigured languages, intents, and slot types. You can change these settings. Start with transcripts

Automatically generate intents from conversation transcripts that you upload. Only English (US) language is available when starting with a transcript.

Bot configuration

Bot name

Bookcar


Maximum 100 characters. Valid characters: A-Z, a-z, 0-9, -, _

Description - optional


This description appears on bot list page. It can help you identify the purpose of your bot.


Identify the best car and helps the customer to receive the same so that they can get a good service.

Maximum 200 characters.

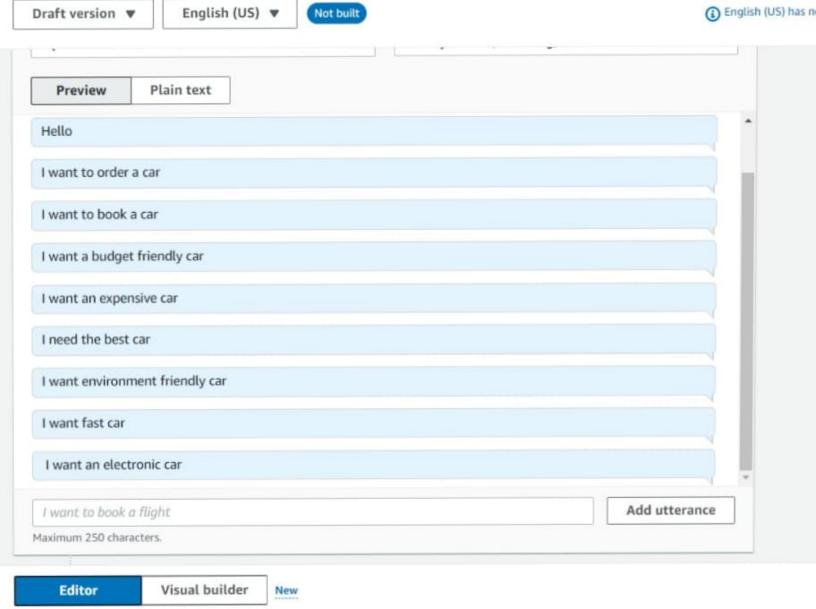



Slot type values			
Modify the list of values used to train th	e machine learning model to recog	nize values for a slot.	
Q Search slot type values			
CARD	car	d X Tab or ; for new value	×
CASH	cas	h X Tab or ; for new value	×
DD	dd	X Tab or ; for new value	×
UPI	upi	X Tab or ; for new value	×
Value	Tab or ; for nev	v value	Add value

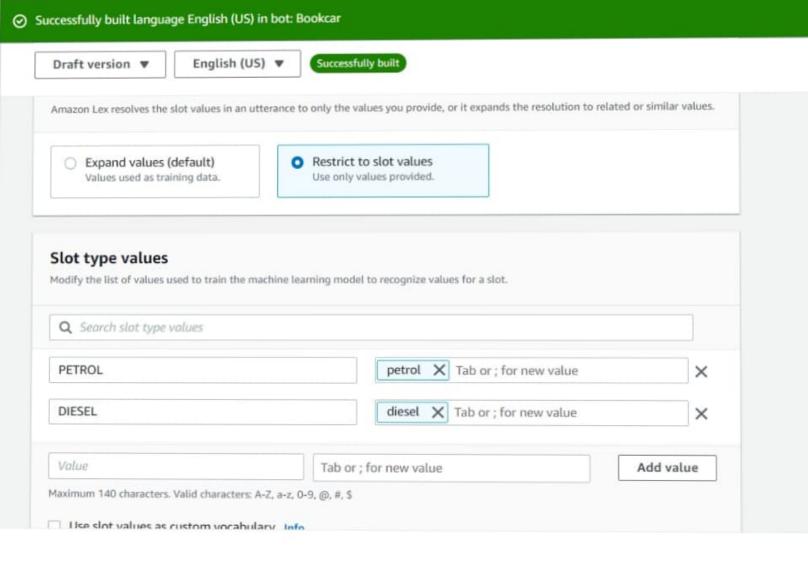


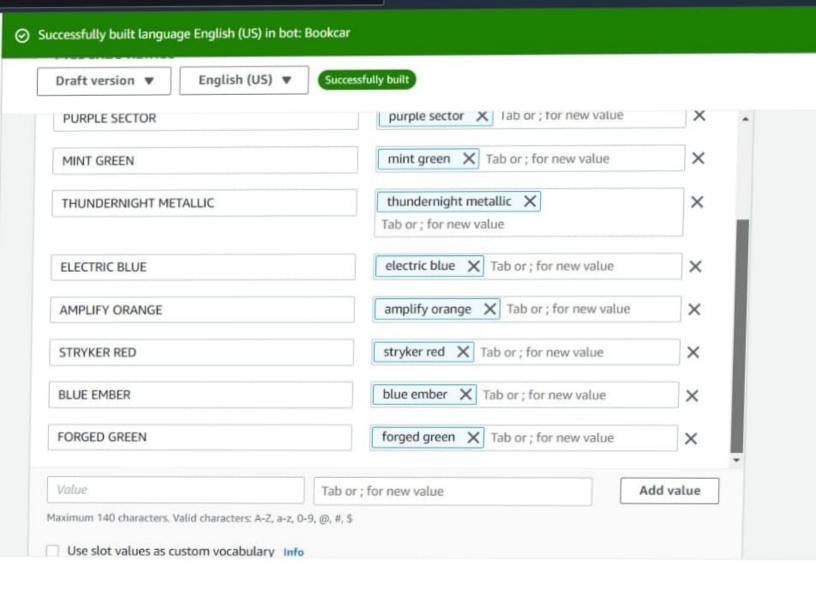


Successfully built language English (US) in bot: Bookcar

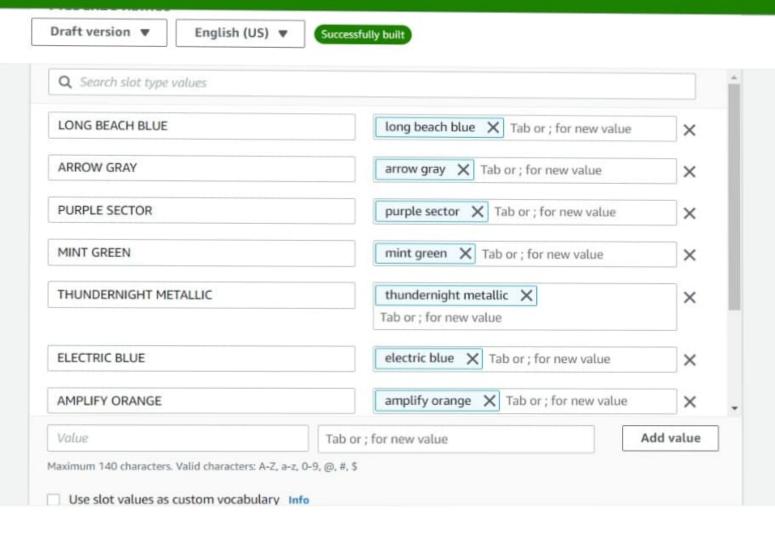


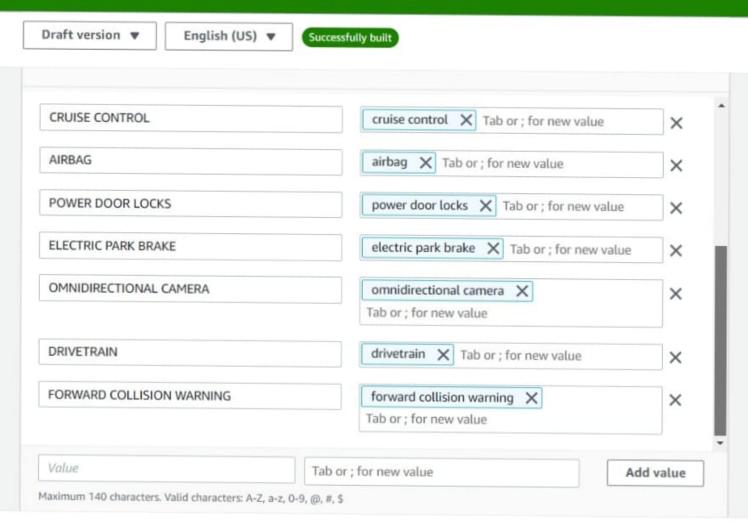


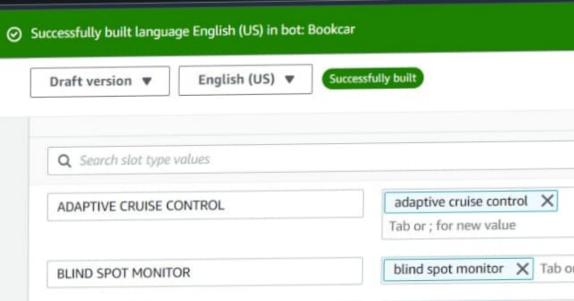


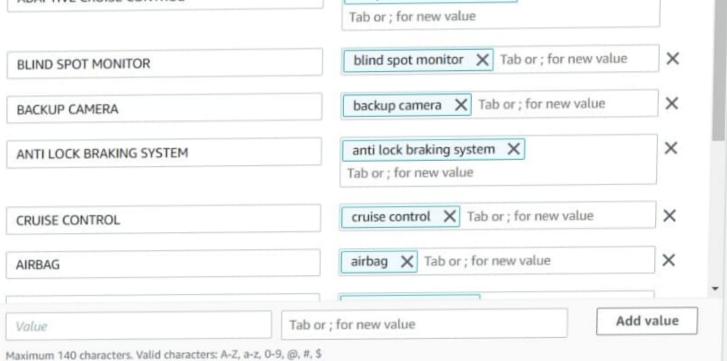

X

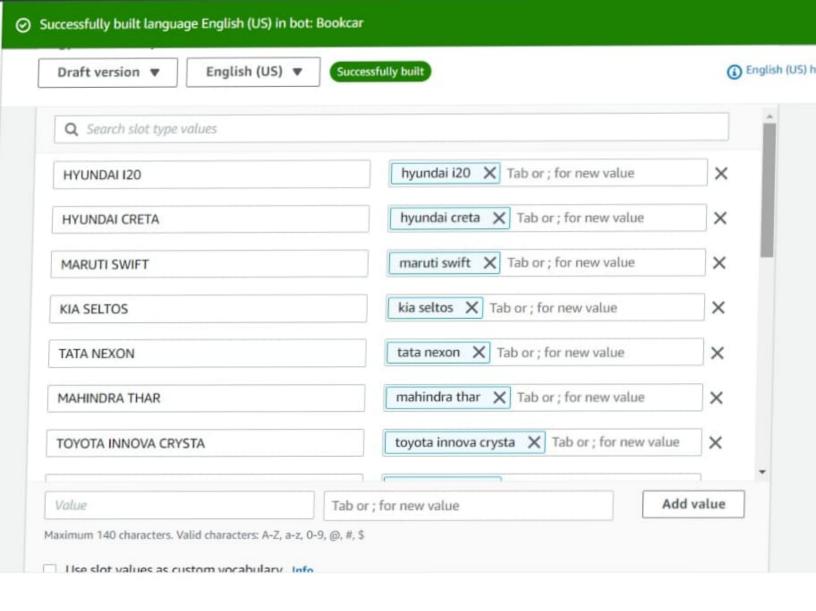

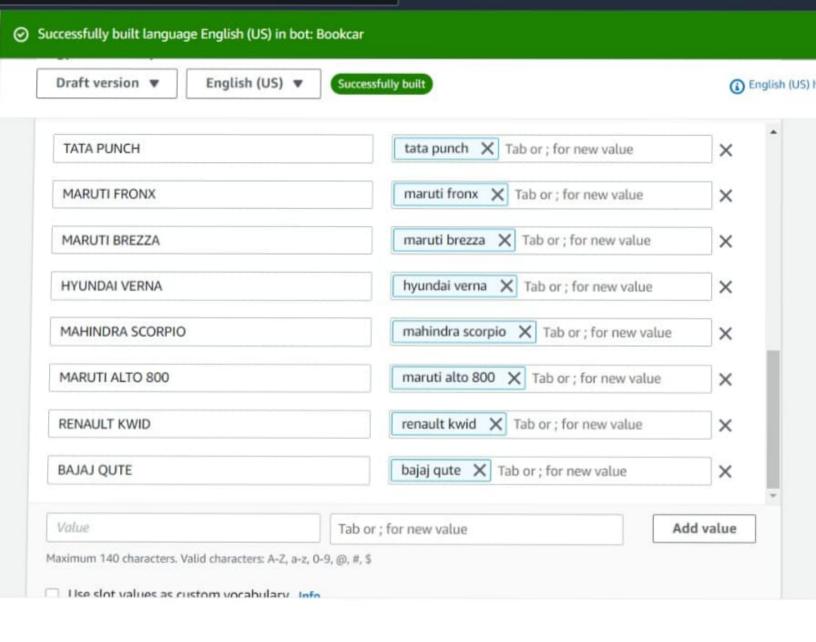

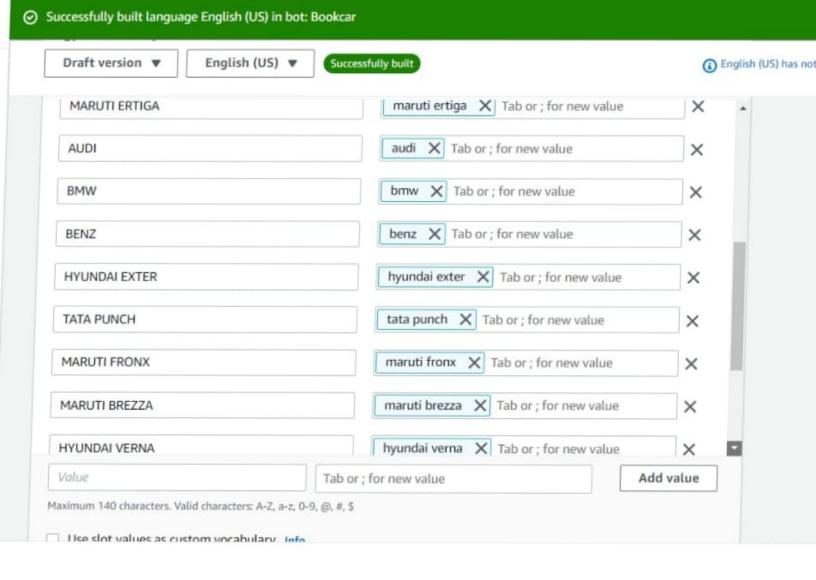



English (US) ▼ Successfully built Draft version ▼ Modify the list of values used to train the machine learning model to recognize values for a slot. Q Search slot type values 16-23 aug X Tab or; for new value 16-23 AUG × 23-31 aug X Tab or; for new value × 23-31 AUG 1-8 sept X Tab or; for new value X 1-8 SEPT 8-15 sept X Tab or; for new value 8-15 SEPT X 15-22 sept X Tab or; for new value 15-22 SEPT X 22-30 sept X Tab or; for new value 22-30 SEPT X Add value Value Tab or; for new value Maximum 140 characters. Valid characters: A-Z, a-z, 0-9, @, #, \$ Use slot values as custom vocabulary Info

Lien clot values as custom uncabulary. Info

Draft version ▼ English (US) ▼ Successfully built

Stot type values

Modify the list of values used to train the machine learning model to recogn

Q Search slot type values		
1-5 LAKH	1-5 lakh X Tab or ; for new value)
5-10 LAKH	5-10 lakh X Tab or; for new value	>
10-15 LAKH	10-15 lakh X Tab or ; for new value	>
15-20 LAKH	15-20 lakh X Tab or ; for new value	>
20-35 LAKH	20-35 lakh X Tab or ; for new value	>
35-50 LAKH	35-50 lakh X Tab or ; for new value	>
35-50 LAKH		

