Language-code selection: historical expansion and final pipeline

A How the target list expanded

Historical build sequence: each stage retains earlier rows and adds languages absent from prior sources.

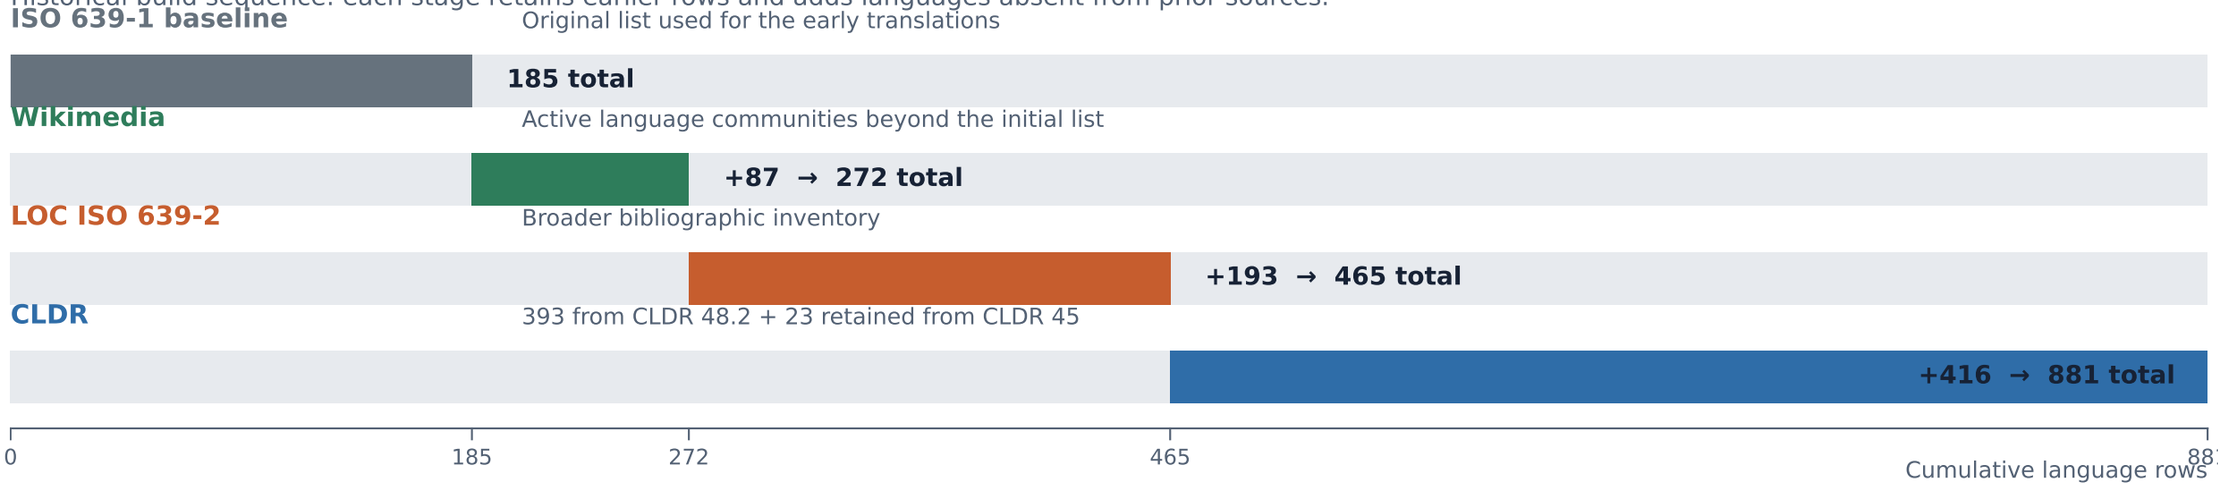

B What the final pipeline uses

Row-defining sources establish the 881-language target set; later sources add names, families, identifiers, and service metadata.

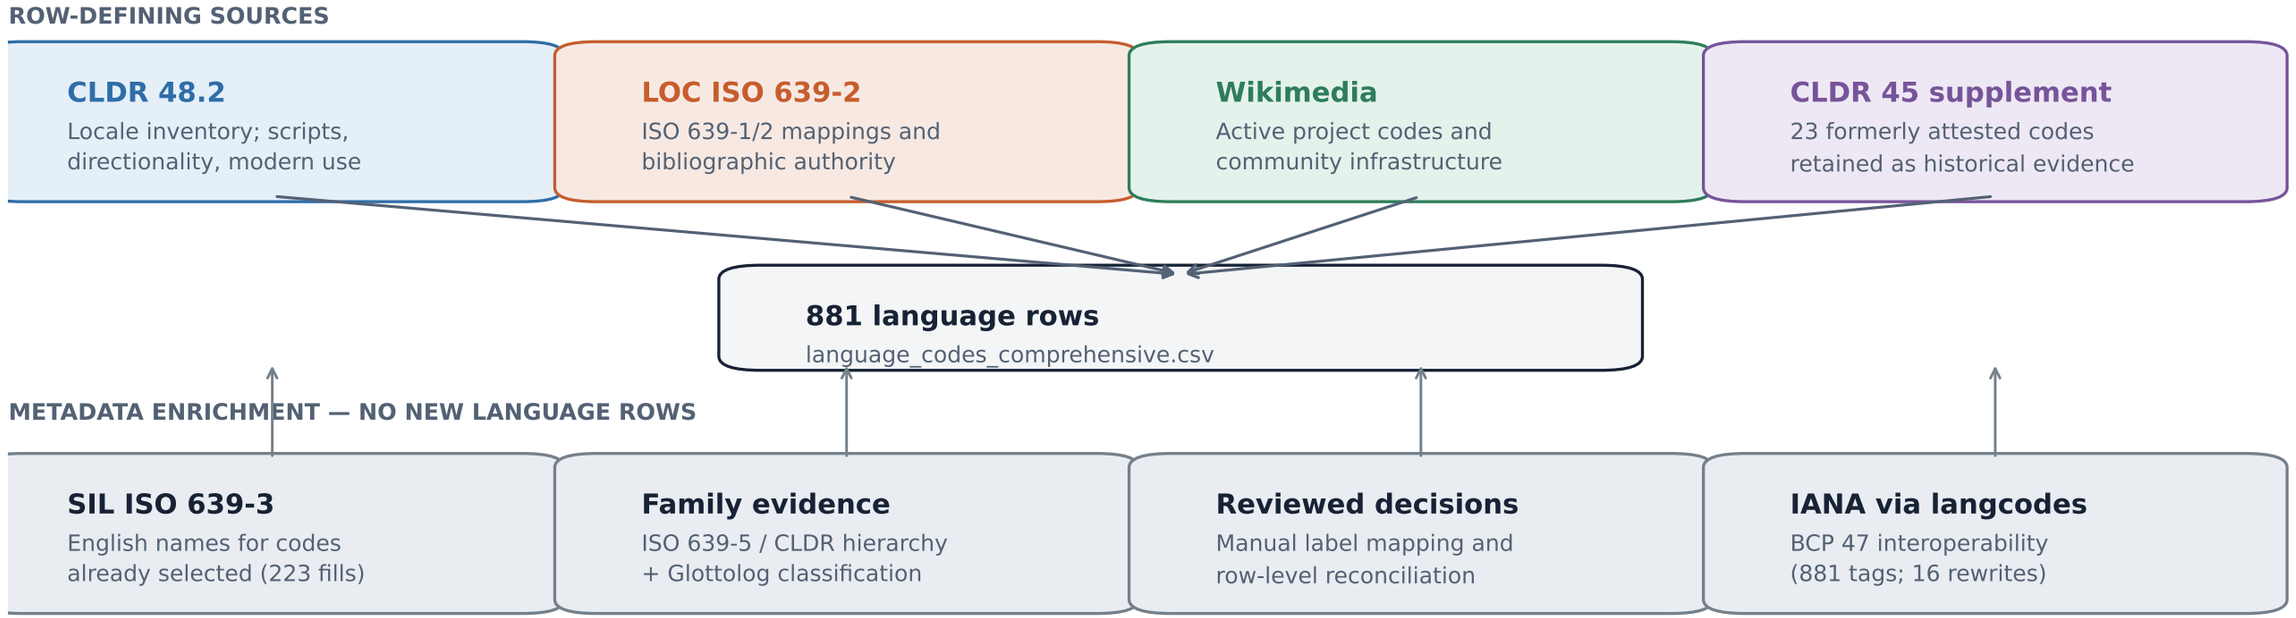

Service-support flags are attached downstream for analysis; they do not determine which languages enter the target set.