

E225 Series Industrial PC



Features

- Intel® Alder Lake-N N50/ N97/ N200/ i3-N305
- Single channel DDR5-4800 up to 16GB
- 2 independent display via DP and HDMI
- 3 LAN (2 x Intel i210-AT, 1 x Intel i226-V)
- 1 RS-232/422/485, 1 RS-232 (Optional)
- 2 USB 3.0, 2 USB 2.0
- Support UPS, 4G or 5G, Wi-Fi expansion
- DC 9-36V
- Dimensions: 172 x 125 x 50mm(L x W x H)
- CE/FCC Class B, ESD 8KV/15KV
- Windows 10/11, centos 8, ubuntu 20.04/22.04


Specifications

Item	Sub-Items	Descriptions				
Processor System	CPU	Intel® Alder Lake-N N50, N97, N200, i3-N305				
	TDP	15W MAX				
	BIOS	AMI 128Mbit SPI Flash				
Memory	Technology	Single channel DDR5 4800MT/s				
	Max. Capacity	16 GB				
	Controller	Intel Gen12 UHD Graphics Engines (SoC integrated)				
Display	Graphic Features	DX12, Open GL 4.6, Vulkan 1.2				
External I/O	DP	1 x DP 1.4 up to 4096 x 2160 @ 60Hz				
	HDMI	1 x HDMI 2.0b up to 4096 x 2160@60Hz				
	Ethernet	2 x Intel i210-AT GbE LAN, 1 x Intel i226-V 2.5GbE LAN				
	СОМ	COM1: RS-232/422/485, COM2: RS-232				
	USB	2 x USB2.0, 2 x USB3.0				
	Power DC Jack	Phoenix 4pin				
	M.2 E-Key	1 x M.2 2230 Support Wi-Fi				
	M.2 B-Key	1 x M.2 3052 Support 4G/5G				
Expansion	M.2 M-Key	1 x M.2 2280 SATA3.0				
	Internal USB2.0	2 x Internal USB2.0 (Pin out)				
	SIM	1 x Nano SIM				
LED	LED Lights	Power status, HDD R/W,USER1,USER2				
Power	Supply Voltage	DC 9-36V ± 10%				
	Max. Consumption	Max 60W				
	Power Management	AT/ATX				
	Watch Dog	Timer Output System reset, Programmable counter from 1 ~ 255 minutes/ seconds				
Feature	TPM	TPM 2.0 (optional)				
Environment	Operational Temperature	0 ~ 60 °C (32~140°F)				
	Storage Temperature	-40° C ~ 85° C (-40~185° F)				
	Relative Humidity (Operating)	95% @ 40 °C (non-condensing)				
	Relative Humidity (Storage)	95% @ 60 °C (non-condensing)				
Dhysical sharestoristics	Dimensions	172 x 125 x 50mm (L x W x H)				
Physical characteristics	Installation	Wall-mounting/Din Rail				
Certification	EMC	CE, FCC				
OS Support	OS Support Windows 10/11, centos 8, ubuntu 20.04/22.04					






Dimensions

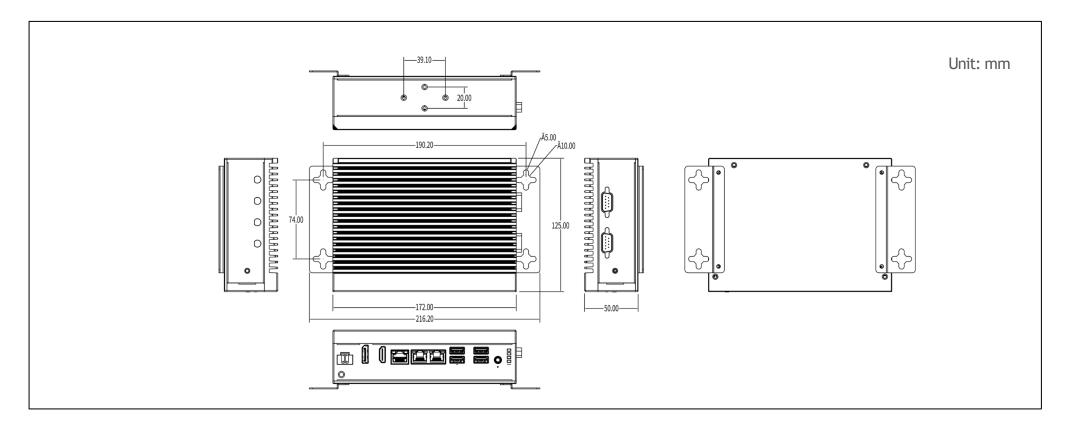

Interface

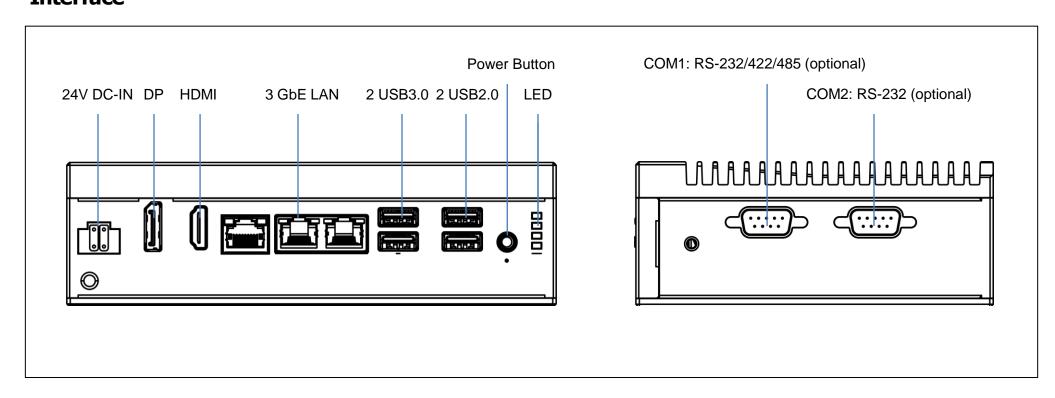

Ordering Information

Part Number	CPU	TDP	Max. Frequency	Core	Thread	LAN	USB 3.0	USB 2.0	СОМ	UPS	4G/5G	Wi-Fi
E225-01	N50	6W	3.40 GHz	2	/	3	2	2	2 (Optional)	Optional	Optional	Optional
E225-02	N97	12W	3.60 GHz	4	/	3	2	2	2 (Optional)	Optional	Optional	Optional
E225-03	N200	6W	3.70 GHz	4	4	3	2	2	2 (Optional)	Optional	Optional	Optional
E225-04	i3-N305	15W	3.80GHz	8	8	3	2	2	2 (Optional)	Optional	Optional	Optional