





Performance

Values are estimated and may vary. The [performance score is calculated](#) directly from these metrics. [See calculator.](#)

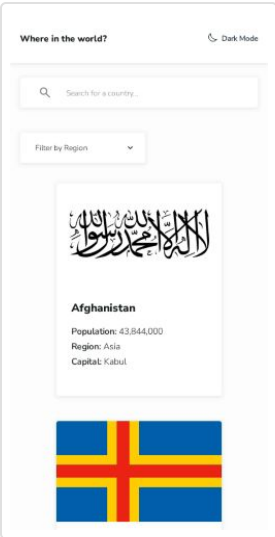

METRICS		Expand view
 First Contentful Paint	1.3 s	 Largest Contentful Paint
 Total Blocking Time	250 ms	 Cumulative Layout Shift
 Speed Index		

6.0 s

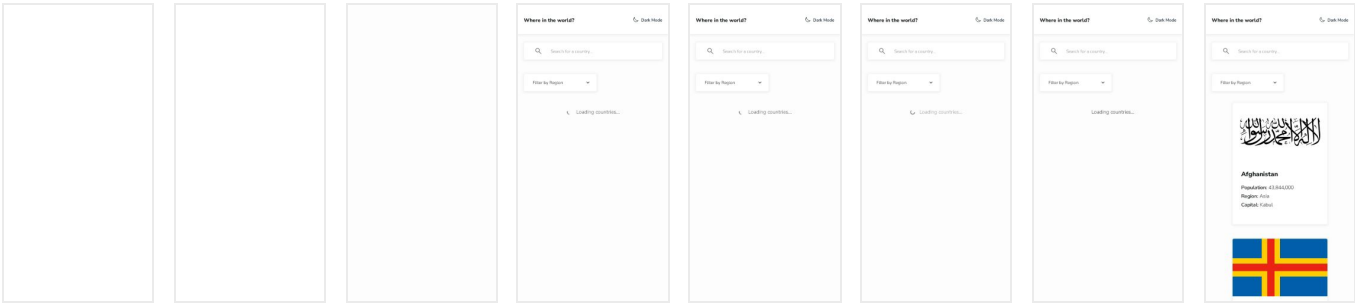

Show audits relevant to: All FCP LCP TBT

INSIGHTS

▲ Render blocking requests — Est savings of 660 ms

Requests are blocking the page's initial render, which may delay LCP. [Deferring or inlining](#) can move these network requests out of the critical path. LCP FCP Unscored

URL	Transfer Size	Duration
netlify.app 1st Party	5.4 KiB	420 ms
/assets/index-C8JJYw3i.css (where-in-the-world-fm-jiro.netlify.app)	5.4 KiB	420 ms

▲ Forced reflow

A forced reflow occurs when JavaScript queries geometric properties (such as `offsetWidth`) after styles have been invalidated by a change to the DOM state. This can result in poor performance. Learn more about [forced reflows](#) and possible mitigations. Unscored


Source	Total reflow time
[unattributed]	72 ms

▲ Network dependency tree

[Avoid chaining critical requests](#) by reducing the length of chains, reducing the download size of resources, or deferring the download of unnecessary resources to improve page load. LCP Unscored

Maximum critical path latency: **3,086 ms**

Initial Navigation



/assets/index-CNCUPHnf.js (where-in-the-world-fm-jiro.netlify.app) - 1,763 ms, 90.61 KiB

/v3.1/all?fields=name,capital,region,population,flags,cca3 (restcountries.com) - 3,086 ms, 142.21 KiB

Preconnected origins

[preconnect](#) hints help the browser establish a connection earlier in the page load, saving time when the first request for that origin is made. The following are the origins that the page preconnected to.

Origin	Source
https://restcountries.com/	head > link <link rel="preconnect" href="https://restcountries.com">

Preconnect candidates

Add [preconnect](#) hints to your most important origins, but try to use no more than 4.

No additional origins are good candidates for preconnecting

■ Use efficient cache lifetimes — Est savings of 18 KiB


A long cache lifetime can speed up repeat visits to your page. [Learn more about caching.](#) LCP FCP
Unscored

Request	Cache TTL	Transfer Size
wikimedia.org		18 KiB
...5c/Flag_of_the_Taliban.svg (upload.wikimedia.org)	None	18 KiB

○ LCP breakdown

Each [subpart has specific improvement strategies](#). Ideally, most of the LCP time should be spent on loading the resources, not within delays. LCP Unscored

Subpart	Duration
Time to first byte	0 ms
Element render delay	1,820 ms



Where in the world?
<h1 class="font-(family-name:--FF) text-[clamp(0.875rem,-1rem+3.90625vw,1.5rem)] font...">

3rd parties



3rd party code can significantly impact load performance. [Reduce and defer loading of 3rd party code](#) to prioritize your page's content. Unscored

3rd party	Transfer size	Main thread time
restcountries.com	142 KiB	0 ms
/v3.1/all?fields=name,capital,region,population,flags,cca3 (restcountries.com)	142 KiB	0 ms
flagcdn.com	1,485 KiB	0 ms
/ec.svg (flagcdn.com)	85 KiB	0 ms
/om.svg (flagcdn.com)	73 KiB	0 ms
/bo.svg (flagcdn.com)	70 KiB	0 ms
/sv.svg (flagcdn.com)	65 KiB	0 ms
/mx.svg (flagcdn.com)	60 KiB	0 ms
/mp.svg (flagcdn.com)	58 KiB	0 ms
/es.svg (flagcdn.com)	47 KiB	0 ms
/do.svg (flagcdn.com)	47 KiB	0 ms
/me.svg (flagcdn.com)	46 KiB	0 ms
/fk.svg (flagcdn.com)	41 KiB	0 ms
/sm.svg (flagcdn.com)	39 KiB	0 ms
/hr.svg (flagcdn.com)	35 KiB	0 ms
/bz.svg (flagcdn.com)	32 KiB	0 ms
/pm.svg (flagcdn.com)	30 KiB	0 ms
/va.svg (flagcdn.com)	29 KiB	0 ms
/je.svg (flagcdn.com)	28 KiB	0 ms
/ht.svg (flagcdn.com)	26 KiB	0 ms
/gt.svg (flagcdn.com)	25 KiB	0 ms
/ad.svg (flagcdn.com)	22 KiB	0 ms
/cr.svg (flagcdn.com)	22 KiB	0 ms
/gs.svg (flagcdn.com)	21 KiB	0 ms
/sh.svg (flagcdn.com)	21 KiB	0 ms
/as.svg (flagcdn.com)	20 KiB	0 ms
/fj.svg (flagcdn.com)	18 KiB	0 ms
/bt.svg (flagcdn.com)	16 KiB	0 ms

3rd party	Transfer size	Main thread time
/yt.svg (flagcdn.com)	15 KiB	0 ms
/bl.svg (flagcdn.com)	15 KiB	0 ms
/tm.svg (flagcdn.com)	15 KiB	0 ms
/md.svg (flagcdn.com)	14 KiB	0 ms
/rs.svg (flagcdn.com)	13 KiB	0 ms
/bm.svg (flagcdn.com)	12 KiB	0 ms
/sa.svg (flagcdn.com)	12 KiB	0 ms
/ky.svg (flagcdn.com)	11 KiB	0 ms
/cy.svg (flagcdn.com)	11 KiB	0 ms
/py.svg (flagcdn.com)	11 KiB	0 ms
/ni.svg (flagcdn.com)	11 KiB	0 ms
/sx.svg (flagcdn.com)	10 KiB	0 ms
/bn.svg (flagcdn.com)	10 KiB	0 ms
/lk.svg (flagcdn.com)	10 KiB	0 ms
/eg.svg (flagcdn.com)	9 KiB	0 ms
/mt.svg (flagcdn.com)	8 KiB	0 ms
/lb.svg (flagcdn.com)	8 KiB	0 ms
/nf.svg (flagcdn.com)	8 KiB	0 ms
/vi.svg (flagcdn.com)	7 KiB	0 ms
/vg.svg (flagcdn.com)	7 KiB	0 ms
/pn.svg (flagcdn.com)	7 KiB	0 ms
/gp.svg (flagcdn.com)	7 KiB	0 ms
/li.svg (flagcdn.com)	6 KiB	0 ms
/io.svg (flagcdn.com)	6 KiB	0 ms
/pt.svg (flagcdn.com)	6 KiB	0 ms
/gu.svg (flagcdn.com)	6 KiB	0 ms
/kz.svg (flagcdn.com)	5 KiB	0 ms
/ms.svg (flagcdn.com)	5 KiB	0 ms
/kh.svg (flagcdn.com)	5 KiB	0 ms
/al.svg (flagcdn.com)	4 KiB	0 ms
/kg.svg (flagcdn.com)	4 KiB	0 ms
/sz.svg (flagcdn.com)	4 KiB	0 ms

3rd party	Transfer size	Main thread time
/tc.svg (flagcdn.com)	4 KiB	0 ms
/pf.svg (flagcdn.com)	3 KiB	0 ms
/gq.svg (flagcdn.com)	3 KiB	0 ms
/zm.svg (flagcdn.com)	3 KiB	0 ms
/im.svg (flagcdn.com)	3 KiB	0 ms
/cc.svg (flagcdn.com)	3 KiB	0 ms
/aq.svg (flagcdn.com)	3 KiB	0 ms
/cx.svg (flagcdn.com)	3 KiB	0 ms
/uy.svg (flagcdn.com)	3 KiB	0 ms
/gi.svg (flagcdn.com)	3 KiB	0 ms
/xk.svg (flagcdn.com)	3 KiB	0 ms
/er.svg (flagcdn.com)	2 KiB	0 ms
/ar.svg (flagcdn.com)	2 KiB	0 ms
/dm.svg (flagcdn.com)	2 KiB	0 ms
/ki.svg (flagcdn.com)	2 KiB	0 ms
/ug.svg (flagcdn.com)	2 KiB	0 ms
/mz.svg (flagcdn.com)	2 KiB	0 ms
/pg.svg (flagcdn.com)	2 KiB	0 ms
/vu.svg (flagcdn.com)	2 KiB	0 ms
/br.svg (flagcdn.com)	2 KiB	0 ms
/ao.svg (flagcdn.com)	2 KiB	0 ms
/ai.svg (flagcdn.com)	2 KiB	0 ms
/by.svg (flagcdn.com)	2 KiB	0 ms
/zw.svg (flagcdn.com)	2 KiB	0 ms
/tj.svg (flagcdn.com)	2 KiB	0 ms
/nc.svg (flagcdn.com)	2 KiB	0 ms
/tf.svg (flagcdn.com)	1 KiB	0 ms
/mn.svg (flagcdn.com)	1 KiB	0 ms
/ls.svg (flagcdn.com)	1 KiB	0 ms
/mo.svg (flagcdn.com)	1 KiB	0 ms
/iq.svg (flagcdn.com)	1 KiB	0 ms
/ir.svg (flagcdn.com)	1 KiB	0 ms

3rd party	Transfer size	Main thread time
/au.svg (flagcdn.com)	1 KiB	0 ms
/hm.svg (flagcdn.com)	1 KiB	0 ms
/si.svg (flagcdn.com)	1 KiB	0 ms
/tk.svg (flagcdn.com)	1 KiB	0 ms
/nz.svg (flagcdn.com)	1 KiB	0 ms
/sk.svg (flagcdn.com)	1 KiB	0 ms
/gd.svg (flagcdn.com)	1 KiB	0 ms
/ve.svg (flagcdn.com)	1 KiB	0 ms
/ke.svg (flagcdn.com)	1 KiB	0 ms
/tv.svg (flagcdn.com)	1 KiB	0 ms
/rw.svg (flagcdn.com)	1 KiB	0 ms
/np.svg (flagcdn.com)	1 KiB	0 ms
/nu.svg (flagcdn.com)	1 KiB	0 ms
/ck.svg (flagcdn.com)	1 KiB	0 ms
/ph.svg (flagcdn.com)	1 KiB	0 ms
/kr.svg (flagcdn.com)	1 KiB	0 ms
/cv.svg (flagcdn.com)	1 KiB	0 ms
/bb.svg (flagcdn.com)	1 KiB	0 ms
/hk.svg (flagcdn.com)	1 KiB	0 ms
/na.svg (flagcdn.com)	1 KiB	0 ms
/mh.svg (flagcdn.com)	1 KiB	0 ms
/uz.svg (flagcdn.com)	1 KiB	0 ms
/et.svg (flagcdn.com)	1 KiB	0 ms
/mw.svg (flagcdn.com)	1 KiB	0 ms
/sb.svg (flagcdn.com)	1 KiB	0 ms
/ca.svg (flagcdn.com)	1 KiB	0 ms
/bi.svg (flagcdn.com)	1 KiB	0 ms
/um.svg (flagcdn.com)	1 KiB	0 ms
/us.svg (flagcdn.com)	1 KiB	0 ms
/my.svg (flagcdn.com)	1 KiB	0 ms
/lr.svg (flagcdn.com)	1 KiB	0 ms
/in.svg (flagcdn.com)	1 KiB	0 ms

3rd party	Transfer size	Main thread time
/kn.svg (flagcdn.com)	1 KiB	0 ms
/ws.svg (flagcdn.com)	1 KiB	0 ms
/cn.svg (flagcdn.com)	1 KiB	0 ms
/km.svg (flagcdn.com)	1 KiB	0 ms
/za.svg (flagcdn.com)	1 KiB	0 ms
/nr.svg (flagcdn.com)	1 KiB	0 ms
/sg.svg (flagcdn.com)	1 KiB	0 ms
/ag.svg (flagcdn.com)	1 KiB	0 ms
/bq.svg (flagcdn.com)	1 KiB	0 ms
/fm.svg (flagcdn.com)	1 KiB	0 ms
/gw.svg (flagcdn.com)	1 KiB	0 ms
/eh.svg (flagcdn.com)	1 KiB	0 ms
/ge.svg (flagcdn.com)	1 KiB	0 ms
/mm.svg (flagcdn.com)	1 KiB	0 ms
/cl.svg (flagcdn.com)	1 KiB	0 ms
/bf.svg (flagcdn.com)	1 KiB	0 ms
/gb.svg (flagcdn.com)	1 KiB	0 ms
/ba.svg (flagcdn.com)	1 KiB	0 ms
/pk.svg (flagcdn.com)	1 KiB	0 ms
/az.svg (flagcdn.com)	1 KiB	0 ms
/wf.svg (flagcdn.com)	1 KiB	0 ms
/tz.svg (flagcdn.com)	1 KiB	0 ms
/hn.svg (flagcdn.com)	1 KiB	0 ms
/tw.svg (flagcdn.com)	1 KiB	0 ms
/tg.svg (flagcdn.com)	1 KiB	0 ms
/gy.svg (flagcdn.com)	1 KiB	0 ms
/jo.svg (flagcdn.com)	1 KiB	0 ms
/aw.svg (flagcdn.com)	1 KiB	0 ms
/st.svg (flagcdn.com)	1 KiB	0 ms
/dj.svg (flagcdn.com)	1 KiB	0 ms
/mk.svg (flagcdn.com)	1 KiB	0 ms
/ss.svg (flagcdn.com)	1 KiB	0 ms

3rd party	Transfer size	Main thread time
/kp.svg (flagcdn.com)	1 KiB	0 ms
/mr.svg (flagcdn.com)	1 KiB	0 ms
/ly.svg (flagcdn.com)	1 KiB	0 ms
/cd.svg (flagcdn.com)	1 KiB	0 ms
/sr.svg (flagcdn.com)	1 KiB	0 ms
/gg.svg (flagcdn.com)	1 KiB	0 ms
/cu.svg (flagcdn.com)	1 KiB	0 ms
/il.svg (flagcdn.com)	1 KiB	0 ms
/cf.svg (flagcdn.com)	1 KiB	0 ms
/tr.svg (flagcdn.com)	1 KiB	0 ms
/pr.svg (flagcdn.com)	1 KiB	0 ms
/tl.svg (flagcdn.com)	1 KiB	0 ms
/vc.svg (flagcdn.com)	1 KiB	0 ms
/tn.svg (flagcdn.com)	1 KiB	0 ms
/dz.svg (flagcdn.com)	1 KiB	0 ms
/cw.svg (flagcdn.com)	1 KiB	0 ms
/ma.svg (flagcdn.com)	1 KiB	0 ms
/cm.svg (flagcdn.com)	1 KiB	0 ms
/jm.svg (flagcdn.com)	1 KiB	0 ms
/pa.svg (flagcdn.com)	1 KiB	0 ms
/re.svg (flagcdn.com)	1 KiB	0 ms
/sy.svg (flagcdn.com)	1 KiB	0 ms
/so.svg (flagcdn.com)	1 KiB	0 ms
/qa.svg (flagcdn.com)	1 KiB	0 ms
/fo.svg (flagcdn.com)	1 KiB	0 ms
/ax.svg (flagcdn.com)	1 KiB	0 ms
/sc.svg (flagcdn.com)	1 KiB	0 ms
/gf.svg (flagcdn.com)	1 KiB	0 ms
/lc.svg (flagcdn.com)	1 KiB	0 ms
/bv.svg (flagcdn.com)	1 KiB	0 ms
/la.svg (flagcdn.com)	1 KiB	0 ms
/sj.svg (flagcdn.com)	1 KiB	0 ms

3rd party	Transfer size	Main thread time
/gr.svg (flagcdn.com)	1 KiB	0 ms
/ch.svg (flagcdn.com)	1 KiB	0 ms
/to.svg (flagcdn.com)	1 KiB	0 ms
/tt.svg (flagcdn.com)	1 KiB	0 ms
/no.svg (flagcdn.com)	1 KiB	0 ms
/is.svg (flagcdn.com)	1 KiB	0 ms
/mv.svg (flagcdn.com)	1 KiB	0 ms
/ps.svg (flagcdn.com)	1 KiB	0 ms
/gm.svg (flagcdn.com)	1 KiB	0 ms
/gh.svg (flagcdn.com)	1 KiB	0 ms
/kw.svg (flagcdn.com)	1 KiB	0 ms
/sn.svg (flagcdn.com)	1 KiB	0 ms
/ae.svg (flagcdn.com)	1 KiB	0 ms
/ne.svg (flagcdn.com)	1 KiB	0 ms
/fi.svg (flagcdn.com)	1 KiB	0 ms
/gl.svg (flagcdn.com)	1 KiB	0 ms
/se.svg (flagcdn.com)	1 KiB	0 ms
/vn.svg (flagcdn.com)	1 KiB	0 ms
/bh.svg (flagcdn.com)	1 KiB	0 ms
/bw.svg (flagcdn.com)	1 KiB	0 ms
/nl.svg (flagcdn.com)	1 KiB	0 ms
/bs.svg (flagcdn.com)	1 KiB	0 ms
/it.svg (flagcdn.com)	1 KiB	0 ms
/dk.svg (flagcdn.com)	1 KiB	0 ms
/sd.svg (flagcdn.com)	1 KiB	0 ms
/cz.svg (flagcdn.com)	1 KiB	0 ms
/bg.svg (flagcdn.com)	1 KiB	0 ms
/ru.svg (flagcdn.com)	1 KiB	0 ms
/sl.svg (flagcdn.com)	1 KiB	0 ms
/lu.svg (flagcdn.com)	1 KiB	0 ms
/ro.svg (flagcdn.com)	1 KiB	0 ms
/cg.svg (flagcdn.com)	1 KiB	0 ms

3rd party	Transfer size	Main thread time
/bd.svg (flagcdn.com)	1 KiB	0 ms
/gn.svg (flagcdn.com)	1 KiB	0 ms
/jp.svg (flagcdn.com)	1 KiB	0 ms
/mq.svg (flagcdn.com)	1 KiB	0 ms
/ie.svg (flagcdn.com)	1 KiB	0 ms
/ee.svg (flagcdn.com)	1 KiB	0 ms
/pe.svg (flagcdn.com)	1 KiB	0 ms
/ng.svg (flagcdn.com)	1 KiB	0 ms
/th.svg (flagcdn.com)	1 KiB	0 ms
/de.svg (flagcdn.com)	1 KiB	0 ms
/pw.svg (flagcdn.com)	1 KiB	0 ms
/mf.svg (flagcdn.com)	1 KiB	0 ms
/co.svg (flagcdn.com)	1 KiB	0 ms
/pl.svg (flagcdn.com)	1 KiB	0 ms
/am.svg (flagcdn.com)	1 KiB	0 ms
/td.svg (flagcdn.com)	1 KiB	0 ms
/be.svg (flagcdn.com)	1 KiB	0 ms
/fr.svg (flagcdn.com)	1 KiB	0 ms
/ga.svg (flagcdn.com)	1 KiB	0 ms
/mu.svg (flagcdn.com)	1 KiB	0 ms
/ye.svg (flagcdn.com)	1 KiB	0 ms
/bj.svg (flagcdn.com)	1 KiB	0 ms
/ua.svg (flagcdn.com)	1 KiB	0 ms
/hu.svg (flagcdn.com)	1 KiB	0 ms
/lv.svg (flagcdn.com)	1 KiB	0 ms
/ml.svg (flagcdn.com)	1 KiB	0 ms
/mg.svg (flagcdn.com)	1 KiB	0 ms
/mc.svg (flagcdn.com)	1 KiB	0 ms
/ci.svg (flagcdn.com)	1 KiB	0 ms
/lt.svg (flagcdn.com)	1 KiB	0 ms
/at.svg (flagcdn.com)	1 KiB	0 ms
/id.svg (flagcdn.com)	1 KiB	0 ms

3rd party

Transfer size

Main thread time

wikimedia.org

18 KiB

0 ms

...5c/Flag_of_the_Taliban.svg (upload.wikimedia.org)

18 KiB

0 ms

These insights are also available in the Chrome DevTools Performance Panel - [record a trace](#) to view more detailed information.

DIAGNOSTICS

 Minimize main-thread work — 2.3 s

Consider reducing the time spent parsing, compiling and executing JS. You may find delivering smaller JS payloads helps with this. [Learn how to minimize main-thread work](#) TBT Unscored

Category	Time Spent
Other	1,454 ms
Script Evaluation	352 ms
Style & Layout	333 ms
Rendering	167 ms
Script Parsing & Compilation	19 ms
Parse HTML & CSS	13 ms

 Reduce unused JavaScript — Est savings of 40 KiB

Reduce unused JavaScript and defer loading scripts until they are required to decrease bytes consumed by network activity. [Learn how to reduce unused JavaScript](#). LCP FCP Unscored

URL	Transfer Size	Est Savings
netlify.app 1st Party	90.1 KiB	40.0 KiB
/assets/index-CNCUPHnf.js (where-in-the-world-fm-jiro.netlify.app)	90.1 KiB	40.0 KiB

 Avoid long main-thread tasks — 3 long tasks found

Lists the longest tasks on the main thread, useful for identifying worst contributors to input delay.

[Learn how to avoid long main-thread tasks](#) TBT Unscored

URL	Start Time	Duration
netlify.app 1st Party		477 ms
/assets/index-CNCUPHnf.js (where-in-the-world-fm-jiro.netlify.app)	1,826 ms	284 ms
https://where-in-the-world-fm-jiro.netlify.app	946 ms	119 ms
/assets/index-CNCUPHnf.js (where-in-the-world-fm-jiro.netlify.app)	2,110 ms	74 ms

More information about the performance of your application. These numbers don't [directly affect](#) the Performance score.

PASSED AUDITS (18)

Hide

● Layout shift culprits

^

Layout shifts occur when elements move absent any user interaction. [Investigate the causes of layout shifts](#), such as elements being added, removed, or their fonts changing as the page loads. CLS

Unscored

● Document request latency

^

Your first network request is the most important. [Reduce its latency](#) by avoiding redirects, ensuring a fast server response, and enabling text compression. LCP FCP Unscored

- ✓ Applies text compression
- ✓ Server responds quickly (observed 1 ms)
- ✓ Avoids redirects

● Optimize DOM size

^

A large DOM can increase the duration of style calculations and layout reflows, impacting page responsiveness. A large DOM will also increase memory usage. [Learn how to avoid an excessive DOM size](#). Unscored

Statistic	Element	Value
Total elements		3,025
DOM depth	Afghanistan Population: 43,84	Population: 9

Statistic	Element	Value
	Region: Asia Capital: Kabul Afghanistan Population: 43,844,000 Region: Asia Capital: Kabul Åland	
Most children	Island... <ul class="mx-auto grid max-w-160 grid-cols-1 justify-items-center gap-y-10 sm:grid-c...">	250

Duplicated JavaScript

^

Remove large, [duplicate JavaScript modules](#) from bundles to reduce unnecessary bytes consumed by network activity. LCP FCP Unscored

Font display

^

Consider setting [font-display](#) to swap or optional to ensure text is consistently visible. swap can be further optimized to mitigate layout shifts with [font metric overrides](#). Unscored

Improve image delivery

^

Reducing the download time of images can improve the perceived load time of the page and LCP. [Learn more about optimizing image size](#) LCP FCP Unscored

INP breakdown

^

Start investigating [how to improve INP](#) by looking at the longest subpart. Unscored

LCP request discovery

^

[Optimize LCP](#) by making the LCP image discoverable from the HTML immediately, and avoiding lazy-loading Unscored

Legacy JavaScript

^

Polyfills and transforms enable older browsers to use new JavaScript features. However, many aren't necessary for modern browsers. Consider modifying your JavaScript build process to not transpile [Baseline](#) features, unless you know you must support older browsers. [Learn why most sites can deploy ES6+ code without transpiling](#) LCP FCP Unscored

● Optimize viewport for mobile



Tap interactions may be [delayed by up to 300 ms](#) if the viewport is not optimized for mobile. Unscored

head > meta

```
<meta name="viewport" content="width=device-width, initial-scale=1.0">
```

● Minify CSS



Minifying CSS files can reduce network payload sizes. [Learn how to minify CSS](#). LCP FCP Unscored

● Minify JavaScript



Minifying JavaScript files can reduce payload sizes and script parse time. [Learn how to minify JavaScript](#). LCP FCP Unscored

● Reduce unused CSS



Reduce unused rules from stylesheets and defer CSS not used for above-the-fold content to decrease bytes consumed by network activity. [Learn how to reduce unused CSS](#). LCP FCP Unscored

● Avoids enormous network payloads — Total size was 1,785 KiB



Large network payloads cost users real money and are highly correlated with long load times. [Learn how to reduce payload sizes](#). Unscored

☒ Show 3rd-party resources (9)

URL	Transfer Size
flagcdn.com	503.8 KiB
/ec.svg (flagcdn.com)	84.7 KiB
/om.svg (flagcdn.com)	73.0 KiB
/bo.svg (flagcdn.com)	69.7 KiB
/sv.svg (flagcdn.com)	65.2 KiB
/mx.svg (flagcdn.com)	59.7 KiB

URL	Transfer Size
/mp.svg (flagcdn.com)	57.5 KiB
/es.svg (flagcdn.com)	47.1 KiB
/do.svg (flagcdn.com)	46.8 KiB
restcountries.com	142.2 KiB
/v3.1/all?fields=name,capital,region,population,flags,cca3 (restcountries.com)	142.2 KiB
netlify.app 1st Party	90.6 KiB
/assets/index-CNCUPHnf.js (where-in-the-world-fm-jiro.netlify.app)	90.6 KiB

User Timing marks and measures

Consider instrumenting your app with the User Timing API to measure your app's real-world performance during key user experiences. [Learn more about User Timing marks.](#)

Unscored

JavaScript execution time — 0.4 s

Consider reducing the time spent parsing, compiling, and executing JS. You may find delivering smaller JS payloads helps with this. [Learn how to reduce Javascript execution time.](#)

TBT

Unscored

URL	Total CPU Time	Script Evaluation	Script Parse
Unattributable	1,476 ms	9 ms	0 ms
Unattributable	1,476 ms	9 ms	0 ms
netlify.app 1st Party	859 ms	342 ms	19 ms
/assets/index-CNCUPHnf.js (where-in-the-world-fm-jiro.netlify.app)	486 ms	340 ms	19 ms
https://where-in-the-world-fm-jiro.netlify.app	373 ms	2 ms	0 ms

Avoid non-composited animations

Animations which are not composited can be janky and increase CLS. [Learn how to avoid non-composited animations](#)

CLS

Unscored

● Image elements have explicit [width](#) and [height](#)



Set an explicit width and height on image elements to reduce layout shifts and improve CLS. [Learn how to set image dimensions](#) CLS Unscored



Accessibility

These checks highlight opportunities to [improve the accessibility of your web app](#). Automatic detection can only detect a subset of issues and does not guarantee the accessibility of your web app, so [manual testing](#) is also encouraged.


NAMES AND LABELS

▲ Skip links are not focusable.



Including a skip link can help users skip to the main content to save time. [Learn more about skip links](#).

Failing Elements



Go directly to the main content of the page.
`<a class="sr-only" href="#main">`

These are opportunities to improve the semantics of the controls in your application. This may enhance the experience for users of assistive technology, like a screen reader.

ADDITIONAL ITEMS TO MANUALLY CHECK (10)

Hide

☐ Interactive controls are keyboard focusable ^

Custom interactive controls are keyboard focusable and display a focus indicator. [Learn how to make custom controls focusable](#). Unscored

☐ Interactive elements indicate their purpose and state ^

Interactive elements, such as links and buttons, should indicate their state and be distinguishable from non-interactive elements. [Learn how to decorate interactive elements with affordance hints](#). Unscored

☐ The page has a logical tab order ^

Tabbing through the page follows the visual layout. Users cannot focus elements that are offscreen. [Learn more about logical tab ordering](#). Unscored

☐ Visual order on the page follows DOM order ^

DOM order matches the visual order, improving navigation for assistive technology. [Learn more about DOM and visual ordering](#). Unscored

☐ User focus is not accidentally trapped in a region ^

A user can tab into and out of any control or region without accidentally trapping their focus. [Learn how to avoid focus traps](#). Unscored

☐ The user's focus is directed to new content added to the page ^

If new content, such as a dialog, is added to the page, the user's focus is directed to it. [Learn how to direct focus to new content](#). Unscored

☐ HTML5 landmark elements are used to improve navigation ^

Landmark elements (<main>, <nav>, etc.) are used to improve the keyboard navigation of the page for assistive technology. [Learn more about landmark elements](#). Unscored

☐ Offscreen content is hidden from assistive technology ^

Offscreen content is hidden with display: none or aria-hidden=true. [Learn how to properly hide offscreen content](#). Unscored

☐ Custom controls have associated labels ^

Custom interactive controls have associated labels, provided by aria-label or aria-labelledby. [Learn more about custom controls and labels.](#) Unscored

 Custom controls have ARIA roles

Custom interactive controls have appropriate ARIA roles. [Learn how to add roles to custom controls.](#) Unscored

These items address areas which an automated testing tool cannot cover. Learn more in our guide on [conducting an accessibility review](#).

PASSED AUDITS (21)

Hide

 [aria-*] attributes match their roles

Each ARIA role supports a specific subset of aria-* attributes. Mismatching these invalidates the aria-* attributes. [Learn how to match ARIA attributes to their roles.](#)

 [aria-hidden="true"] is not present on the document <body>

Assistive technologies, like screen readers, work inconsistently when aria-hidden="true" is set on the document <body>. [Learn how aria-hidden affects the document body.](#)

 [aria-*] attributes have valid values

Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid values. [Learn more about valid values for ARIA attributes.](#)

 [aria-*] attributes are valid and not misspelled

Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid names. [Learn more about valid ARIA attributes.](#)

 Buttons have an accessible name

When a button doesn't have an accessible name, screen readers announce it as "button", making it

unusable for users who rely on screen readers. [Learn how to make buttons more accessible.](#)

● Image elements have `[alt]` attributes ^

Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. [Learn more about the alt attribute.](#)

● Form elements have associated labels ^

Labels ensure that form controls are announced properly by assistive technologies, like screen readers. [Learn more about form element labels.](#)

● `[user-scalable="no"]` is not used in the `<meta name="viewport">` element and the `[maximum-scale]` attribute is not less than 5. ^

Disabling zooming is problematic for users with low vision who rely on screen magnification to properly see the contents of a web page. [Learn more about the viewport meta tag.](#)

● ARIA attributes are used as specified for the element's role ^

Some ARIA attributes are only allowed on an element under certain conditions. [Learn more about conditional ARIA attributes.](#)

● `[aria-hidden="true"]` elements do not contain focusable descendents ^

Focusable descendents within an `[aria-hidden="true"]` element prevent those interactive elements from being available to users of assistive technologies like screen readers. [Learn how aria-hidden affects focusable elements.](#)

● Elements use only permitted ARIA attributes ^

Using ARIA attributes in roles where they are prohibited can mean that important information is not communicated to users of assistive technologies. [Learn more about prohibited ARIA roles.](#)

 Background and foreground colors have a sufficient contrast ratio

Low-contrast text is difficult or impossible for many users to read. [Learn how to provide sufficient color contrast.](#)

 Document has a `<title>` element

The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. [Learn more about document titles.](#)

 `<html>` element has a `[lang]` attribute

If a page doesn't specify a `lang` attribute, a screen reader assumes that the page is in the default language that the user chose when setting up the screen reader. If the page isn't actually in the default language, then the screen reader might not announce the page's text correctly. [Learn more about the `lang` attribute.](#)

 `<html>` element has a valid value for its `[lang]` attribute

Specifying a valid [BCP 47 language](#) helps screen readers announce text properly. [Learn how to use the `lang` attribute.](#)

 Links have a discernible name

Link text (and alternate text for images, when used as links) that is discernible, unique, and focusable improves the navigation experience for screen reader users. [Learn how to make links accessible.](#)

 Lists contain only `<li>` elements and script supporting elements (`<script>` and `<template>`).

Screen readers have a specific way of announcing lists. Ensuring proper list structure aids screen reader output. [Learn more about proper list structure.](#)

 List items (`<li>`) are contained within `<ul>`, `<ol>` or `<menu>` parent elements

Screen readers require list items () to be contained within a parent , or <menu> to be announced properly. [Learn more about proper list structure.](#)

● Touch targets have sufficient size and spacing. ^

Touch targets with sufficient size and spacing help users who may have difficulty targeting small controls to activate the targets. [Learn more about touch targets.](#)

● Heading elements appear in a sequentially-descending order ^

Properly ordered headings that do not skip levels convey the semantic structure of the page, making it easier to navigate and understand when using assistive technologies. [Learn more about heading order.](#)

● Document has a main landmark. ^

One main landmark helps screen reader users navigate a web page. [Learn more about landmarks.](#)

NOT APPLICABLE (38)

Hide

○ [accesskey] values are unique ^

Access keys let users quickly focus a part of the page. For proper navigation, each access key must be unique. [Learn more about access keys.](#) Unscored

○ button, link, and menuitem elements have accessible names ^

When an element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn how to make command elements more accessible.](#) Unscored

○ Deprecated ARIA roles were not used ^

Deprecated ARIA roles may not be processed correctly by assistive technology. [Learn more about deprecated ARIA roles.](#) Unscored

- Elements with `role="dialog"` or `role="alertdialog"` have accessible names. ^

ARIA dialog elements without accessible names may prevent screen readers users from discerning the purpose of these elements. [Learn how to make ARIA dialog elements more accessible.](#) Unscored

- ARIA input fields have accessible names ^

When an input field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn more about input field labels.](#) Unscored

- ARIA `meter` elements have accessible names ^

When a meter element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn how to name meter elements.](#) Unscored

- ARIA `progressbar` elements have accessible names ^

When a progressbar element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn how to label progressbar elements.](#) Unscored

- `[role]`s have all required `[aria-*)` attributes ^

Some ARIA roles have required attributes that describe the state of the element to screen readers. [Learn more about roles and required attributes.](#) Unscored

- Elements with an ARIA `[role]` that require children to contain a specific `[role]` have all required children. ^

Some ARIA parent roles must contain specific child roles to perform their intended accessibility functions. [Learn more about roles and required children elements.](#) Unscored

- `[role]`s are contained by their required parent element ^

Some ARIA child roles must be contained by specific parent roles to properly perform their intended accessibility functions. [Learn more about ARIA roles and required parent element.](#) Unscored

- `[role]` values are valid ^

ARIA roles must have valid values in order to perform their intended accessibility functions. [Learn more](#)

[about valid ARIA roles.](#) Unscored

- Elements with the `role=text` attribute do not have focusable descendents. ^

Adding `role=text` around a text node split by markup enables VoiceOver to treat it as one phrase, but the element's focusable descendents will not be announced. [Learn more about the `role=text` attribute.](#) Unscored

- ARIA toggle fields have accessible names ^

When a toggle field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn more about toggle fields.](#) Unscored

- ARIA `tooltip` elements have accessible names ^

When a tooltip element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn how to name tooltip elements.](#) Unscored

- ARIA `treeitem` elements have accessible names ^

When a `treeitem` element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn more about labeling `treeitem` elements.](#) Unscored

- The page contains a heading, skip link, or landmark region ^

Adding ways to bypass repetitive content lets keyboard users navigate the page more efficiently. [Learn more about bypass blocks.](#) Unscored

- `<d1>`'s contain only properly-ordered `<dt>` and `<dd>` groups, `<script>`, `<template>` or `<div>` elements. ^

When definition lists are not properly marked up, screen readers may produce confusing or inaccurate output. [Learn how to structure definition lists correctly.](#) Unscored

- Definition list items are wrapped in `<d1>` elements ^

Definition list items (`<dt>` and `<dd>`) must be wrapped in a parent `<d1>` element to ensure that screen readers can properly announce them. [Learn how to structure definition lists correctly.](#) Unscored

- ARIA IDs are unique ^

The value of an ARIA ID must be unique to prevent other instances from being overlooked by assistive technologies. [Learn how to fix duplicate ARIA IDs.](#) Unscored

☐ No form fields have multiple labels ^

Form fields with multiple labels can be confusingly announced by assistive technologies like screen readers which use either the first, the last, or all of the labels. [Learn how to use form labels.](#) Unscored

☐ `<frame>` or `<iframe>` elements have a title ^

Screen reader users rely on frame titles to describe the contents of frames. [Learn more about frame titles.](#) Unscored

☐ `<html>` element has an `[xml:lang]` attribute with the same base language as the `[lang]` attribute. ^

If the webpage does not specify a consistent language, then the screen reader might not announce the page's text correctly. [Learn more about the lang attribute.](#) Unscored

☐ Input buttons have discernible text. ^

Adding discernable and accessible text to input buttons may help screen reader users understand the purpose of the input button. [Learn more about input buttons.](#) Unscored

☐ `<input type="image">` elements have `[alt]` text ^

When an image is being used as an `<input>` button, providing alternative text can help screen reader users understand the purpose of the button. [Learn about input image alt text.](#) Unscored

☐ Links are distinguishable without relying on color. ^

Low-contrast text is difficult or impossible for many users to read. Link text that is discernible improves the experience for users with low vision. [Learn how to make links distinguishable.](#) Unscored

☐ The document does not use `<meta http-equiv="refresh">` ^

Users do not expect a page to refresh automatically, and doing so will move focus back to the top of the page. This may create a frustrating or confusing experience. [Learn more about the refresh meta tag.](#) Unscored

☐ `<object>` elements have alternate text ^

Screen readers cannot translate non-text content. Adding alternate text to `<object>` elements helps screen readers convey meaning to users. [Learn more about alt text for object elements.](#) Unscored

- ☐ Select elements have associated label elements. ^

Form elements without effective labels can create frustrating experiences for screen reader users. [Learn more about the select element.](#) Unscored

- ☐ No element has a `[tabindex]` value greater than 0 ^

A value greater than 0 implies an explicit navigation ordering. Although technically valid, this often creates frustrating experiences for users who rely on assistive technologies. [Learn more about the tabindex attribute.](#) Unscored

- ☐ Cells in a `<table>` element that use the `[headers]` attribute refer to table cells within the same table. ^

Screen readers have features to make navigating tables easier. Ensuring `<td>` cells using the `[headers]` attribute only refer to other cells in the same table may improve the experience for screen reader users. [Learn more about the headers attribute.](#) Unscored

- ☐ `<th>` elements and elements with `[role="columnheader"/"rowheader"]` have data cells they describe. ^

Screen readers have features to make navigating tables easier. Ensuring table headers always refer to some set of cells may improve the experience for screen reader users. [Learn more about table headers.](#) Unscored

- ☐ `[lang]` attributes have a valid value ^

Specifying a valid [BCP 47 language](#) on elements helps ensure that text is pronounced correctly by a screen reader. [Learn how to use the lang attribute.](#) Unscored

- ☐ `<video>` elements contain a `<track>` element with `[kind="captions"]` ^

When a video provides a caption it is easier for deaf and hearing impaired users to access its information. [Learn more about video captions.](#) Unscored

- ☐ Tables have different content in the summary attribute and `<caption>`. ^

The summary attribute should describe the table structure, while `<caption>` should have the onscreen title. Accurate table mark-up helps users of screen readers. [Learn more about summary and caption.](#) Unscored

☐ All heading elements contain content. ^

A heading with no content or inaccessible text prevent screen reader users from accessing information on the page's structure. [Learn more about headings.](#) Unscored

☐ Uses ARIA roles only on compatible elements ^

Many HTML elements can only be assigned certain ARIA roles. Using ARIA roles where they are not allowed can interfere with the accessibility of the web page. [Learn more about ARIA roles.](#) Unscored

☐ Image elements do not have `[alt]` attributes that are redundant text. ^

Informative elements should aim for short, descriptive alternative text. Alternative text that is exactly the same as the text adjacent to the link or image is potentially confusing for screen reader users, because the text will be read twice. [Learn more about the alt attribute.](#) Unscored

☐ Identical links have the same purpose. ^

Links with the same destination should have the same description, to help users understand the link's purpose and decide whether to follow it. [Learn more about identical links.](#) Unscored



Best Practices

TRUST AND SAFETY

☐ Ensure CSP is effective against XSS attacks ^

A strong Content Security Policy (CSP) significantly reduces the risk of cross-site scripting (XSS) attacks. [Learn how to use a CSP to prevent XSS](#) Unscored

Description	Directive	Severity
No CSP found in enforcement mode		High

○ Ensure proper origin isolation with COOP ^

The Cross-Origin-Opener-Policy (COOP) can be used to isolate the top-level window from other documents such as pop-ups. [Learn more about deploying the COOP header.](#) Unscored

Description	Directive	Severity
No COOP header found		High

○ Mitigate clickjacking with XFO or CSP ^

The X-Frame-Options (XFO) header or the frame-ancestors directive in the Content-Security-Policy (CSP) header control where a page can be embedded. These can mitigate clickjacking attacks by blocking some or all sites from embedding the page. [Learn more about mitigating clickjacking.](#) Unscored

Description	Severity
No frame control policy found	High

○ Mitigate DOM-based XSS with Trusted Types ^

The require-trusted-types-for directive in the Content-Security-Policy (CSP) header instructs user agents to control the data passed to DOM XSS sink functions. [Learn more about mitigating DOM-based XSS with Trusted Types.](#) Unscored

Description	Severity
No `Content-Security-Policy` header with Trusted Types directive found	High

PASSED AUDITS (13)

[Hide](#)

● Uses HTTPS ^

All sites should be protected with HTTPS, even ones that don't handle sensitive data. This includes avoiding [mixed content](#), where some resources are loaded over HTTP despite the initial request being

served over HTTPS. HTTPS prevents intruders from tampering with or passively listening in on the communications between your app and your users, and is a prerequisite for HTTP/2 and many new web platform APIs. [Learn more about HTTPS.](#)

● Avoids deprecated APIs ^

Deprecated APIs will eventually be removed from the browser. [Learn more about deprecated APIs.](#)

● Avoids third-party cookies ^

Third-party cookies may be blocked in some contexts. [Learn more about preparing for third-party cookie restrictions.](#)

● Allows users to paste into input fields ^

Preventing input pasting is a bad practice for the UX, and weakens security by blocking password managers. [Learn more about user-friendly input fields.](#)

● Avoids requesting the geolocation permission on page load ^

Users are mistrustful of or confused by sites that request their location without context. Consider tying the request to a user action instead. [Learn more about the geolocation permission.](#)

● Avoids requesting the notification permission on page load ^

Users are mistrustful of or confused by sites that request to send notifications without context. Consider tying the request to user gestures instead. [Learn more about responsibly getting permission for notifications.](#)

● Displays images with correct aspect ratio ^

Image display dimensions should match natural aspect ratio. [Learn more about image aspect ratio.](#)

● Serves images with appropriate resolution ^

Image natural dimensions should be proportional to the display size and the pixel ratio to maximize image clarity. [Learn how to provide responsive images.](#)

● Page has the HTML doctype ^

Specifying a doctype prevents the browser from switching to quirks-mode. [Learn more about the doctype declaration.](#)

● Properly defines charset ^

A character encoding declaration is required. It can be done with a <meta> tag in the first 1024 bytes of the HTML or in the Content-Type HTTP response header. [Learn more about declaring the character encoding.](#)

● No browser errors logged to the console ^

Errors logged to the console indicate unresolved problems. They can come from network request failures and other browser concerns. [Learn more about this errors in console diagnostic audit](#)

● No issues in the [Issues](#) panel in Chrome Devtools ^

Issues logged to the Issues panel in Chrome Devtools indicate unresolved problems. They can come from network request failures, insufficient security controls, and other browser concerns. Open up the Issues panel in Chrome DevTools for more details on each issue.

● Page has valid source maps ^

Source maps translate minified code to the original source code. This helps developers debug in production. In addition, Lighthouse is able to provide further insights. Consider deploying source maps to take advantage of these benefits. [Learn more about source maps.](#) Unscored

NOT APPLICABLE (3)

Hide

○ Redirects HTTP traffic to HTTPS ^

Make sure that you redirect all HTTP traffic to HTTPS in order to enable secure web features for all your users. [Learn more.](#) Unscored

☐ Use a strong HSTS policy ^

Deployment of the HSTS header significantly reduces the risk of downgrading HTTP connections and eavesdropping attacks. A rollout in stages, starting with a low max-age is recommended. [Learn more about using a strong HSTS policy.](#) Unscored

☐ Detected JavaScript libraries ^

All front-end JavaScript libraries detected on the page. [Learn more about this JavaScript library detection diagnostic audit.](#) Unscored



SEO

These checks ensure that your page is following basic search engine optimization advice. There are many additional factors Lighthouse does not score here that may affect your search ranking, including performance on [Core Web Vitals](#). [Learn more about Google Search Essentials.](#)

CRAWLING AND INDEXING

▲ robots.txt is not valid — 99 errors found ^

If your robots.txt file is malformed, crawlers may not be able to understand how you want your website to be crawled or indexed. [Learn more about robots.txt.](#)

Line #	Content	Error
1	<code><!doctype html></code>	Syntax not understood
2	<code><html lang="en"></code>	Syntax not understood
3	<code><head></code>	Syntax not understood
4	<code><meta charset="UTF-8" /></code>	Syntax not understood
5	<code><meta name="viewport" content="width=device-width, initial-scale=1.0" /></code>	Syntax not understood
6	<code><title>Where In The World</title></code>	Syntax not understood
7	<code><meta name="author" content="Elmar Chavez" /></code>	Syntax not understood
8	<code><meta</code>	Syntax not understood
9	<code>name="description"</code>	Syntax not understood
10	<code>content="Explore countries using the REST Countries API with search, region filtering, and a responsive light/dark theme switcher."</code>	Syntax not understood
11	<code>/></code>	Syntax not understood
12	<code><link rel="icon" href="/favicon.ico" type="image/x-icon" /></code>	Syntax not understood
13	<code><link</code>	Syntax not understood
14	<code>rel="icon"</code>	Syntax not understood
15	<code>type="image/png"</code>	Syntax not understood
16	<code>sizes="32x32"</code>	Syntax not understood

Line #	Content	Error
17	href="/icons/favicon-32x32.png"	Syntax not understood
18	/>	Syntax not understood
19	<link	Syntax not understood
20	rel="icon"	Syntax not understood
21	type="image/png"	Syntax not understood
22	sizes="16x16"	Syntax not understood
23	href="/icons/favicon-16x16.png"	Syntax not understood
24	/>	Syntax not understood
25	<link	Syntax not understood
26	rel="apple-touch-icon"	Syntax not understood
27	sizes="180x180"	Syntax not understood
28	href="/icons/apple-touch-icon.png"	Syntax not understood
29	/>	Syntax not understood
30	<meta property="og:site_name" content="CodingWithJiro" />	Unknown directive
31	<meta property="og:title" content="Where In The World" />	Unknown directive
32	<meta property="og:type" content="website" />	Unknown directive

Line #	Content	Error
33	<meta	Syntax not understood
34	property="og:description"	Unknown directive
35	content="Explore countries using the REST Countries API with search, region filtering, and a responsive light/dark theme switcher."	Syntax not understood
36	/>	Syntax not understood
37	<meta	Syntax not understood
38	property="og:url"	Unknown directive
39	content="https://where-in-the-world-fm-jiro.netlify.app/"	Unknown directive
40	/>	Syntax not understood
41	<meta	Syntax not understood
42	property="og:image"	Unknown directive
43	content="https://where-in-the-world-fm-jiro.netlify.app/img/site-preview-meta_1200x630.png"	Unknown directive
44	/>	Syntax not understood
45	<meta name="twitter:card" content="summary_large_image" />	Unknown directive
46	<meta name="twitter:title" content="Where In The World" />	Unknown directive
47	<meta	Syntax not understood
48	name="twitter:description"	Unknown directive

Line #	Content	Error
49	content="Explore countries using the REST Countries API with search, region filtering, and a responsive theme switcher #FrontendMentor #React #TypeScript"	Syntax not understood
50	/>	Syntax not understood
51	<meta	Syntax not understood
52	name="twitter:image"	Unknown directive
53	content="https://where-in-the-world-fm-jiro.netlify.app/img/site-preview-meta_1200x630.png"	Unknown directive
54	/>	Syntax not understood
55	<meta name="color-scheme" content="light dark" />	Syntax not understood
56	<meta	Syntax not understood
57	name="theme-color"	Syntax not understood
58	content="#fcfcfc"	Syntax not understood
59	media="(prefers-color-scheme: light)"	Unknown directive
60	/>	Syntax not understood
61	<meta	Syntax not understood
62	name="theme-color"	Syntax not understood
63	content="#202c37"	Syntax not understood
64	media="(prefers-color-scheme: dark)"	Unknown directive

Line #	Content	Error
65	<code></></code>	Syntax not understood
66	<code><meta name="robots" content="index, follow" /></code>	Syntax not understood
67	<code><link</code>	Syntax not understood
68	<code>rel="canonical"</code>	Syntax not understood
69	<code>href="https://where-in-the-world-fm-jiro.netlify.app/"</code>	Unknown directive
70	<code>></code>	Syntax not understood
71	<code><link</code>	Syntax not understood
72	<code>rel="preload"</code>	Syntax not understood
73	<code>href="/fonts/nunito-sans-v19-latin-300.woff2"</code>	Syntax not understood
74	<code>as="font"</code>	Syntax not understood
75	<code>type="font/woff2"</code>	Syntax not understood
76	<code>crossorigin</code>	Syntax not understood
77	<code>></code>	Syntax not understood
78	<code><link</code>	Syntax not understood
79	<code>rel="preload"</code>	Syntax not understood
80	<code>href="/fonts/nunito-sans-v19-latin-600.woff2"</code>	Syntax not understood

Line #	Content	Error
81	as="font"	Syntax not understood
82	type="font/woff2"	Syntax not understood
83	crossorigin	Syntax not understood
84	/>	Syntax not understood
85	<link	Syntax not understood
86	rel="preload"	Syntax not understood
87	href="/fonts/nunito-sans-v19-latin-800.woff2"	Syntax not understood
88	as="font"	Syntax not understood
89	type="font/woff2"	Syntax not understood
90	crossorigin	Syntax not understood
91	/>	Syntax not understood
92	<link rel="preconnect" href="https://restcountries.com" />	Unknown directive
93	<script type="module" crossorigin src="/assets/index-CNCUPHnf.js"></script>	Syntax not understood
94	<link rel="stylesheet" crossorigin href="/assets/index-C8JJYw3i.css">	Syntax not understood
95	</head>	Syntax not understood
96	<body>	Syntax not understood

Line #	Content	Error
97	<code><div id="root"></div></code>	Syntax not understood
98	<code></body></code>	Syntax not understood
99	<code></html></code>	Syntax not understood

To appear in search results, crawlers need access to your app.

ADDITIONAL ITEMS TO MANUALLY CHECK (1)

[Hide](#)

☐ Structured data is valid

Run the [Structured Data Testing Tool](#) to validate structured data. [Learn more about Structured Data.](#)

Unscored

Run these additional validators on your site to check additional SEO best practices.

PASSED AUDITS (9)

[Hide](#)

Page isn't blocked from indexing

Search engines are unable to include your pages in search results if they don't have permission to crawl them. [Learn more about crawler directives.](#)

Document has a `<title>` element

The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. [Learn more about document titles.](#)

Document has a meta description

Meta descriptions may be included in search results to concisely summarize page content. [Learn more about the meta description.](#)

 Page has successful HTTP status code

Pages with unsuccessful HTTP status codes may not be indexed properly. [Learn more about HTTP status codes.](#)

 Links have descriptive text

Descriptive link text helps search engines understand your content. [Learn how to make links more accessible.](#)

 Links are crawlable

Search engines may use href attributes on links to crawl websites. Ensure that the href attribute of anchor elements links to an appropriate destination, so more pages of the site can be discovered. [Learn how to make links crawlable](#)

 Image elements have `[alt]` attributes

Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. [Learn more about the alt attribute.](#)

 Document has a valid `hreflang`

hreflang links tell search engines what version of a page they should list in search results for a given language or region. [Learn more about hreflang.](#)

 Document has a valid `rel=canonical`

Canonical links suggest which URL to show in search results. [Learn more about canonical links.](#)

 Initial page load Unknown Using HeadlessChromium146.0.7680.153 with lrGenerated by **Lighthouse** 13.0.1 | [File an issue](#)