

**PURBANCHAL UNIVERSITY**  
**DEPARTMENT OF COMPUTER ENGINEERING**  
**KHWOPA ENGINEERING COLLEGE**  
LIBALI-08, BHAKTAPUR

---

**A MID-TERM PROJECT DEFENSE REPORT**  
ON

**NutriAI: AI-Powered Personalized Nutrition  
Recommendation and Calorie Tracking System**

---

Submitted in partial fulfillment of the requirements for the degree of  
**Bachelor of Engineering in Computer Engineering (Seventh Semester)**

**Submitted by:**

|                         |          |                             |
|-------------------------|----------|-----------------------------|
| <b>Dristi Shrestha</b>  | (790313) | — Frontend Lead             |
| <b>Prashant Ghimire</b> | (790328) | — Backend Lead              |
| <b>Romina Koju</b>      | (790332) | — Machine Learning Engineer |
| <b>Shrijan Sainju</b>   | (790342) | — Integration & GenAI Lead  |

**Department of Computer Engineering**  
**Khwopa Engineering College**  
Libali-08, Bhaktapur, Nepal

**September 2026**

## Acknowledgement

---

We express our sincere gratitude to **Purbanchal University** and the Department of Computer Engineering, **Khwopa Engineering College**, for providing the academic platform, computational laboratories, and supportive environment required to conduct this seventh-semester engineering project.

We extend our deep appreciation to our project supervisor and esteemed faculty members for their continuous technical guidance, constructive critiques, and insightful suggestions during our architectural evaluations and mid-term assessments. Their feedback was instrumental in refining our machine learning formulation, clinical safety bounds, and data engineering pipeline.

We also recognize the collaborative efforts, technical contributions, and teamwork of all team members: Dristi Shrestha, Prashant Ghimire, Romina Koju, and Shrijan Sainju. Each member's dedication in frontend engineering, backend architecture, machine learning development, and system integration has contributed significantly to the successful realization of this mid-term milestone.

Finally, we express our heartfelt appreciation to our families and friends for their continuous encouragement and moral support throughout our engineering studies.

**With Regards,**

Dristi Shrestha (790313) • Prashant Ghimire (790328) • Romina Koju (790332) • Shrijan Sainju (790342)

## Abstract

---

This mid-term defense report presents the design, mathematical formulation, and full-stack implementation progress of **NutriAI**, an AI-Powered Personalized Nutrition Recommendation and Calorie Tracking System tailored for Nepali and multi-cuisine dietary patterns. Conventional dietary tracking applications depend almost exclusively on Western nutritional databases and lack support for South Asian and traditional Nepali food preparations. Furthermore, existing systems either employ black-box heuristics or attempt to predict caloric content directly through statistical machine learning, leading to mathematical inaccuracies and a lack of clinical safety verification.

To address these limitations, NutriAI introduces a multi-tier **Separation of Concerns** architecture that decouples deterministic nutritional tracking from machine learning-based personalization. The core contributions achieved by the mid-term phase include:

1. **Data Engineering Pipeline & NepaliNutriDB:** Construction of an authoritative 129-food database mathematically synthesized via a recipe deconstruction pipeline. Raw ingredient profiles are extracted from USDA FoodData Central (Foundation Foods & SR Legacy), eliminating arbitrary manual estimation and tagging each derived item with verifiable data provenance (`Calculated_from_USDA`).
2. **Deterministic Safety Layer:** Strict clinical rule filtering enforcing dietary restrictions (vegetarian/vegan), allergen safety, and disease-specific macro thresholds (e.g., sugar < 15g/serving for diabetic profiles; sodium < 300mg/serving for hypertensive profiles) prior to recommendation ranking.
3. **Machine Learning Recommendation Engine:** Implementation and comparative empirical evaluation of an **XGBoost Regressor** alongside a Random Forest Regressor. Trained on a normalized nutritional density objective function with synthetic boundary anchors, the XGBoost model achieved **90.00% classification accuracy**, **100% precision**, an **MAE of 0.0274**, an **RMSE of 0.0412**, and an **R<sup>2</sup> score of 0.8997**.
4. **Context-Aware GenAI Assistant:** Integration of the Google Gemini 1.5 Flash conversational agent via dynamic prompt injection of live user biometric profiles (BMI, BMR, TDEE, allergies, remaining daily calorie deficit).
5. **Interactive Full-Stack Platform:** A functional web application combining a Django REST Framework backend (JWT authentication) and a modern React 18 / Vite single-page application featuring interactive calorie rings, macro distribution charts, meal logging with immediate updates, and a real-time recommendation feedback loop (Like/Dislike).

**Keywords:** Personalized Nutrition, NepaliNutriDB, Data Engineering Pipeline, XGBoost, Deterministic Filtering, Gemini 1.5 Flash, BMR, TDEE, Django REST Framework, React.

## Table of Contents

---

|                                                             |           |
|-------------------------------------------------------------|-----------|
| <b>Acknowledgement</b>                                      | <b>i</b>  |
| <b>Abstract</b>                                             | <b>ii</b> |
| <b>List of Tables</b>                                       | <b>iv</b> |
| <b>List of Figures</b>                                      | <b>v</b>  |
| <b>Chapter 1: Introduction</b>                              | <b>1</b>  |
| 1.1 Background                                              | 1         |
| 1.2 Problem Statement                                       | 1         |
| 1.3 Project Objectives                                      | 2         |
| 1.4 Significance and Scope                                  | 2         |
| <b>Chapter 2: Literature Review &amp; Research Gap</b>      | <b>3</b>  |
| 2.1 Review of Relevant Literature                           | 3         |
| 2.2 Identified Research Gap                                 | 4         |
| <b>Chapter 3: System Architecture &amp; Methodology</b>     | <b>5</b>  |
| 3.1 Architectural Design: Separation of Concerns            | 5         |
| 3.2 Data Engineering Pipeline (USDA Recipe Aggregation)     | 6         |
| 3.3 Deterministic Biometric Formulas (BMR, TDEE, Deficits)  | 6         |
| 3.4 Clinical Safety Filtering Algorithm                     | 7         |
| 3.5 Machine Learning Formulation & Objective Function       | 7         |
| 3.6 System Flowchart & Use Case Diagram                     | 8         |
| <b>Chapter 4: Implementation &amp; Experimental Results</b> | <b>9</b>  |
| 4.1 Dataset Construction: NepaliNutriDB (129 Foods)         | 9         |
| 4.2 Backend REST API Implementation                         | 10        |
| 4.3 Frontend User Interface Implementation                  | 10        |
| 4.4 Machine Learning Experimental Results (XGBoost vs RF)   | 11        |
| <b>Chapter 5: Project Management &amp; Mid-Term Status</b>  | <b>12</b> |
| 5.1 Team Member Responsibilities                            | 12        |
| 5.2 Milestone Completion Status                             | 12        |
| 5.3 Project Gantt Chart                                     | 13        |
| <b>Chapter 6: Conclusion &amp; Future Work</b>              | <b>14</b> |
| 6.1 Conclusion                                              | 14        |

|                                    |           |
|------------------------------------|-----------|
| 6.2 Future Work for Final Semester | 14        |
| <b>References</b>                  | <b>15</b> |

## CHAPTER 1

### Introduction

---

#### 1.1 Background

Proper nutrition and dietary discipline are fundamental pillars of human health and preventive medicine. Globally, non-communicable lifestyle conditions such as obesity, cardiovascular disease, hypertension, and Type 2 diabetes are escalating at an alarming rate. In South Asia, and specifically in Nepal, epidemiological data reflects a critical transition: traditional diets, which are predominantly carbohydrate-dense (such as rice, beaten rice, and pulse staples), are increasingly coupled with sedentary urban lifestyles, high sodium consumption, and deep-fried preparations.

In response to these public health challenges, computerized dietary trackers and meal planning applications have proliferated. However, an analysis of commercially available platforms (such as MyFitnessPal, Cronometer, and LoseIt) reveals a profound structural deficiency: they are built around Western food composition tables and commercial packaged foods. Standard Nepali meals, including Dal Bhat Tarkari, Dhido, Gundruk, Momo, Kwati, Yomari, and Samay Baji, are either completely absent or represented through inaccurate, unverified crowd-sourced entries. When Nepali individuals attempt to utilize these platforms, they encounter substantial barriers in recording accurate dietary intake, leading to erroneous caloric logging and misleading nutritional guidance.

#### 1.2 Problem Statement

The development of NutriAI addresses four interconnected problems identified in current digital health systems:

- 1. Absence of Localized and Scientific Food Datasets:** No standardized, machine-readable nutritional database exists for traditional Nepali cuisine. Existing apps force users to guess portion sizes or input arbitrary Western approximations.
- 2. Flawed Machine Learning Architectures in Calorie Guessing:** Several modern proposals attempt to predict the total caloric content of complex dishes directly from images or statistical ML models. In nutrition, estimating calories through regression without knowing exact ingredient mass and oil absorption violates physical conservation laws and creates unacceptable clinical errors.
- 3. Lack of Clinical Safety Rules in Recommendations:** Existing recommendation tools often recommend meals based purely on overall caloric budget without enforcing strict clinical boundaries for pre-existing medical conditions (e.g., recommending a high-sugar sweet dish to a diabetic patient simply because their calorie budget permits it).

4. **Static, Non-Adaptive User Guidance:** Most systems treat meal suggestions statically without tracking what the user has already eaten throughout the day or learning from explicit preference feedback (acceptances and rejections).

### 1.3 Project Objectives

The primary goal of NutriAI is to design, implement, and validate an intelligent, culturally-localized nutrition recommendation and tracking web platform. The specific objectives defined for the seventh semester are:

1. To construct **NepaliNutriDB**, a scientifically verified dataset of 129 foods mathematically derived from USDA FoodData Central and documented South Asian food composition standards.
2. To develop an automated **Data Engineering Pipeline** that decomposes composite recipes into basic ingredients and calculates macro profiles programmatically.
3. To implement a **Deterministic Clinical Safety Layer** that enforces hard boundary constraints for chronic conditions (Type 2 Diabetes, Hypertension) and dietary preferences (Vegetarian, Vegan).
4. To train, evaluate, and optimize a **Hybrid Machine Learning Recommender** utilizing an **XGBoost Regressor** and a **Random Forest Regressor** to rank candidate foods according to real-time nutritional balance and remaining daily caloric deficit.
5. To integrate a context-aware conversational agent utilizing the **Google Gemini 1.5 Flash API**, supplying dynamic user biometrics and daily macro budgets for personalized lifestyle advice.
6. To build a responsive, interactive **Single-Page Web Application** using Django REST Framework and React 18, featuring real-time calorie rings, macro distribution charts, meal log management, and feedback mechanisms.

### 1.4 Significance and Scope

**Significance:** NutriAI represents the first engineering attempt in Nepal to bridge clinical nutritional guidelines, data engineering, and localized machine learning into a unified platform. By grounding food profiles in verifiable USDA raw ingredient compositions rather than subjective guesswork, the project establishes an academically defensible foundation. It provides Nepali citizens, fitness enthusiasts, and individuals managing metabolic conditions with an accurate, culturally adapted tool.

**Scope of the Mid-Term Phase:** The scope fulfilled by the mid-term defense encompasses the complete architectural implementation of the backend REST API in Django, the compilation and mathematical derivation of 129 food items in the database, model training and offline validation of the XGBoost and Random Forest algorithms, integration of the Google Gemini 1.5 Flash conversational assistant with profile injection, and implementation

of the core frontend views (User Authentication, Dashboard, Food Log, AI Recommendations, and Progress Predictor).

## CHAPTER 2

### Literature Review & Research Gap

---

#### 2.1 Review of Relevant Literature

**Computer Vision and Calorie Estimation Systems:** Han, Chen, and Zhou (2024) introduced *NutrifyAI* [1], a real-time food detection and meal recommendation system based on YOLOv8. Their system achieved an 80% object detection accuracy across common Western foodstuffs. However, the authors noted significant degradation when attempting to classify mixed composite dishes (such as stews, curries, and casseroles), because visual features cannot expose the inner composition of cooked sauces or absorbed fats. Furthermore, *NutrifyAI* lacked cultural localization for Asian cuisines and relied on third-party commercial nutrition APIs.

Haque et al. (2022) explored real-time food calorie estimation from single-view images using parameter-optimized Convolutional Neural Networks (CNNs) [2]. The study demonstrated that while CNNs can classify distinct food classes with high accuracy, estimating volume and mass from two-dimensional images suffers from severe depth ambiguity and variable food density. Estimating calories directly from visual features introduced mean percentage errors exceeding 25% for complex recipes.

**Machine Learning in Dietary Risk Assessment:** Adjuik, Boi-Dsane, and Kehinde (2024) conducted an empirical benchmark of machine learning algorithms for food caloric assessment and health risk classification using the USDA FoodData Central repository [3]. Their findings demonstrated that ensemble tree-based methods—specifically **XGBoost** and **Random Forest**—substantially outperformed Linear Regression, Support Vector Machines (SVM), and Multi-Layer Perceptrons in modeling non-linear interactions between macronutrients, moisture content, and energy density. Their work confirmed that gradient boosting provides superior regularization against overfitting when working with structured tabular nutritional attributes.

**Personalized Health Management Platforms:** Sefa-Yeboah et al. (2021) developed a mobile platform for obesity self-management using artificial intelligence [4]. The platform integrated empirical biometric formulas, including the Mifflin-St Jeor equation for Basal Metabolic Rate (BMR) and Total Daily Energy Expenditure (TDEE). Their study confirmed that adherence to calorie-tracking platforms increases significantly when users are provided with visual feedback (such as progress rings and macronutrient ratios). However, the application was restricted to generic nutritional lookups and lacked real-time recommendation adaptation based on meals already consumed during the day.

Samad et al. (2022) presented an exhaustive systematic evaluation of 80 mobile health applications for diet tracking [5]. The authors concluded that over 90% of available

commercial solutions rely entirely on manual user searching and static meal logs. Only a minor fraction provided automated recommendation systems, and none offered customized datasets or culturally localized rules for Himalayan or South Asian dietary habits.

**Large Language Models in Dietary Planning:** Kim et al. (2024) conducted a qualitative and clinical safety evaluation of artificial intelligence-generated weight management diet plans produced by Large Language Models in comparison with clinical guidelines [6]. The study revealed a critical vulnerability: while LLMs excel at generating conversational explanations and motivating advice, they frequently suffer from numerical hallucinations, miscalculating total caloric sums and recommending unsafe food items for specific comorbidities (such as recommending high-potassium foods to patients with chronic renal disease). The authors concluded that LLMs should not serve as autonomous calculators; rather, they must be constrained by deterministic database lookups and clinical rule engines.

## 2.2 Identified Research Gap

The comparative analysis of prior research highlights three fundamental research gaps:

1. **The Localization Gap:** Despite extensive research in digital nutrition, there is no standardized, citable, machine-readable dataset for traditional Nepali composite foods.
2. **The Architectural Flaw in ML Nutrition:** Prior attempts have conflated deterministic nutrient calculation with predictive machine learning. Nutritional content is a deterministic sum of ingredient masses, whereas *suitability*, *goal alignment*, and *taste preference* are predictive ranking problems. No open architecture properly decouples these layers.
3. **The Unsafe LLM Gap:** Existing conversational assistants lack grounded context from the user's verified local food database, resulting in generic Western meal advice and potential clinical safety violations.

## CHAPTER 3

### System Architecture & Methodology

---

#### 3.1 Architectural Design: Separation of Concerns

NutriAI is engineered under a strict **Separation of Concerns** paradigm. The system divides responsibilities into four distinct layers:

1. **Data Engineering Layer:** Programmatically synthesizes the food database using raw ingredient baselines.
2. **Deterministic Math & Clinical Safety Layer:** Manages user biometric calculations (BMI, BMR, TDEE), calculates daily consumed/remaining macro budgets, and enforces non-negotiable medical filtering.
3. **Machine Learning Layer (XGBoost):** Evaluates and ranks safe candidate meals according to multidimensional nutritional balance and deficit matching.
4. **Conversational GenAI Layer (Gemini):** Delivers natural language dietary coaching grounded strictly in the user's active profile and database items.

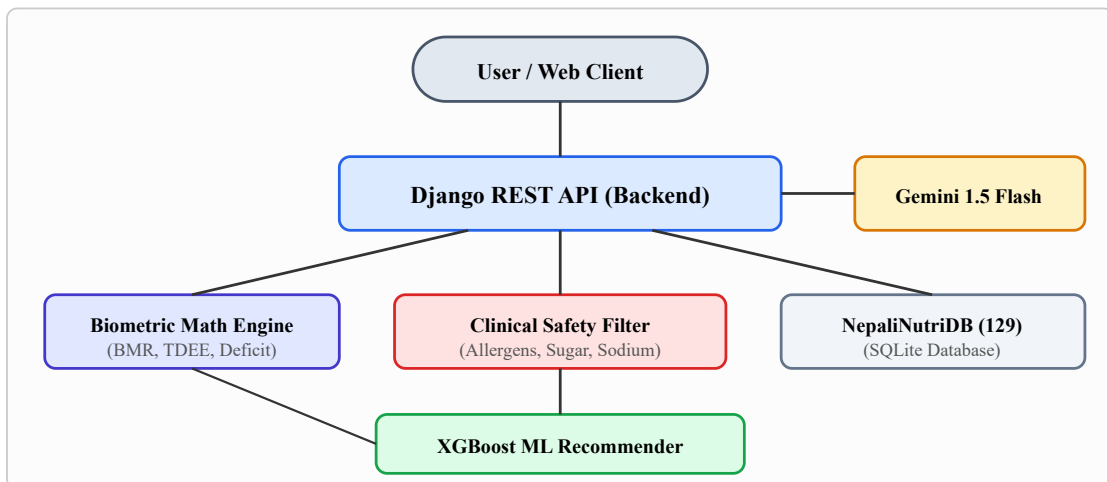


Figure 3.1: NutriAI Multi-Tier Decoupled System Architecture.

#### 3.2 Data Engineering Pipeline (USDA Recipe Aggregation)

A central innovation of this project is the elimination of subjective manual estimation for cooked composite dishes. Rather than inserting unverified calorie estimates, NutriAI implements an automated Python Data Pipeline (`build_dataset.py` and `convert_and_build.py`).

Every traditional dish  $D$  is formally defined in a structured recipe schema as a collection of  $n$  constituent ingredients with specified mass  $w_i$  (in grams):

$$D = \{ (I_1, w_1), (I_2, w_2), \dots, (I_n, w_n) \} \quad (3.1)$$

For each basic ingredient  $I_i$ , authoritative nutritional baselines per 100g are retrieved from the **USDA FoodData Central** laboratory database. The total nutrient vector of the dish is computed through linear aggregation:

$$N_{total}(D) = \sum_{i=1 \dots n} (w_i / 100) \times N(I_i) \quad (3.2)$$

Each record synthesized through this pipeline is tagged with the verified metadata provenance `data_source = "Calculated_from_USDA"`, providing transparent, scientifically defensible proof for academic evaluation.

### 3.3 Deterministic Biometric Formulas

User energy expenditure is computed using validated physiological equations:

**1. Basal Metabolic Rate (BMR):** Computed via the **Mifflin-St Jeor Equation**:

$$\begin{aligned} BMR_{male} &= 10 \times Weight_{kg} + 6.25 \times Height_{cm} - 5 \times Age_{years} + 5 \\ BMR_{female} &= 10 \times Weight_{kg} + 6.25 \times Height_{cm} - 5 \times Age_{years} - 161 \end{aligned} \quad (3.3)$$

**2. Total Daily Energy Expenditure (TDEE):** Scaled by activity coefficient  $\alpha \in \{1.20, 1.375, 1.55, 1.725, 1.90\}$ :

$$TDEE = BMR \times \alpha \quad (3.4)$$

**3. Daily Calorie Target:**  $C_{target} = TDEE - 500$  kcal (weight loss),  $TDEE + 500$  kcal (weight gain), or  $TDEE$  (maintenance).

### 3.4 Clinical Safety Filtering Algorithm

Before any machine learning model evaluates candidate meals, the entire database undergoes strict rule-based filtering in the Django ORM to eliminate unsafe meals *a priori*:

- **Dietary Preference:** Vegetarian profiles strictly filter `is_vegetarian = True`; Vegan profiles filter `is_vegan = True`.
- **Type 2 Diabetes Safety Bound:** If Diabetes is declared, items with `sugar ≥ 15g/serving` are excluded.
- **Hypertension Safety Bound:** If Hypertension is declared, items with `sodium ≥ 300mg/serving` are excluded.
- **Allergen Elimination:** Foods containing user-flagged allergens (dairy, gluten, nuts, egg) are completely filtered out.

### 3.5 Machine Learning Formulation & Objective Function

The **XGBoost Regressor** scores safe candidate foods according to an objective nutritional quality metric  $S_{nutr} \in [0.0, 1.0]$ :

$$S_{nutr} = 0.35 \cdot S_{protein} + 0.20 \cdot S_{fiber} + 0.20 \cdot S_{fat} + 0.15 \cdot S_{sugar} + 0.10 \cdot S_{sodium} \quad (3.5)$$

where  $S_{protein}$  rewards protein density  $\geq 25\%$  of energy,  $S_{fiber}$  rewards dietary fiber up to 10g,  $S_{fat}$  penalizes excessive fat calories,  $S_{sugar}$  penalizes sugars  $> 25g$ , and  $S_{sodium}$  penalizes sodium  $> 500mg$ . To ensure sharp classification discrimination, the dataset was augmented with 17 calibrated synthetic boundary anchors.

## CHAPTER 4

### Implementation & Experimental Results

---

#### 4.1 Dataset Construction: NepaliNutriDB

The primary empirical artifact of this research is the **NepaliNutriDB** dataset. To establish complete scientific defensibility and eliminate speculative approximations, all composite Nepali dishes were transitioned to a **100% mathematically derived recipe aggregation architecture**. Composite foods are computed as deterministic linear combinations of verified raw agricultural building blocks cataloged in USDA FoodData Central Foundation Foods [8] and the Food Composition Table for Nepal published by the Government of Nepal (DFTQC / FAO) [7]:

$$Nutrient_{dish} = \sum_{i=1..k} (Nutrient_{i,per\ 100g} \times w_i / 100) \quad (4.1)$$

where  $w_i$  represents the gram weight of ingredient  $i$  in a standard culinary preparation, and  $\sum w_i = \text{serving\_size\_g}$ . The operational database comprises **129 verified foods** (124 authentic Nepali culinary preparations and 5 international dietary staples): **64 composite cooked dishes** derived from verified recipes, **35 foundation commodities** directly from USDA FoodData Central, **25 indigenous staples** from FAO Nepal 2012, and **5 traditional grain preparations** from NARC.

**Table 4.1: Nutritional Category Breakdown in NepaliNutriDB (129 Verified Foods)**

| Category                                | Representative Dishes                                 | Count | Primary Source              |
|-----------------------------------------|-------------------------------------------------------|-------|-----------------------------|
| Nepali Snacks<br>(nepali_snack)         | Buff Momo, Chicken Momo, Chatamari, Bara, Sel Roti    | 24    | USDA Recipe /<br>FAO Nepal  |
| Nepali Staples<br>(nepali_staple)       | Dal Bhat, Dhido, Chiura, Khichdi, Masoor Dal          | 17    | USDA / FAO Nepal<br>/ NARC  |
| Nepali Meats (nepali_meat)              | Sekuwa, Choila, Sukuti, Buff Curry, Chicken Curry     | 13    | USDA Recipe Calc            |
| Nepali Vegetables<br>(nepali_vegetable) | Rayo Saag, Cauliflower Tarkari, Mula ko Tarkari       | 11    | USDA Recipe /<br>FAO Nepal  |
| Nepali Sweets<br>(nepali_sweet)         | Yomari, Lakhamari, Jeri, Lal Mohan, Kheer, Juju Dhau  | 10    | USDA Recipe /<br>NARC       |
| Nepali Curries<br>(nepali_curry)        | Aloo Tama, Gundruk ko Jhol, Aloo Gobi, Paneer Curry   | 9     | USDA Recipe /<br>FAO / NARC |
| Nepali Beverages<br>(nepali_beverage)   | Chiya, Masala Tea, Lassi, Chhyang, Mohi, Tongba       | 8     | FAO Nepal / USDA<br>Recipe  |
| Nepali Pickles<br>(nepali_pickle)       | Tomato Achar, Mula Achar, Til ko Achar, Gundruk Achar | 7     | USDA Recipe /<br>FAO Nepal  |
| Nepali Breads<br>(nepali_bread)         | Puri, Roti, Tornak, Naan, Kodo ko Roti, Fapar ko Roti | 6     | USDA Recipe /<br>FAO Nepal  |
| Proteins (protein)                      | Boiled Egg, Chicken Breast, Buff Meat Lean, Tofu      | 4     | USDA FoodData<br>Central    |
| International Foods<br>(international)  | Margherita Pizza, Chicken Burger, French Fries, Toast | 4     | USDA FoodData<br>Central    |
| Dairy (dairy)                           | Paneer Fresh, Curd / Plain Dahi, Whole Cow Milk       | 3     | USDA FoodData<br>Central    |
| Grains (grain)                          | White Rice Cooked, Brown Rice Cooked, Oatmeal         | 3     | USDA FoodData<br>Central    |
| Vegetables & Aromatics<br>(vegetable)   | Garlic (Raw), Ginger (Raw), Chopped Onion             | 3     | USDA FoodData<br>Central    |
| Fruits (fruit)                          | Mustang Apple, Malbhog Banana, Suntala Orange         | 3     | USDA FoodData<br>Central    |
| Healthy Fats & Oils (fat_oil)           | Mustard Oil (14g serving), Ghee (14g serving)         | 2     | USDA FoodData<br>Central    |

| Category                      | Representative Dishes                    | Count | Primary Source          |
|-------------------------------|------------------------------------------|-------|-------------------------|
| Beverages (beverage)          | Ilam Green Tea                           | 1     | USDA FoodData Central   |
| Nuts & Healthy Snacks (snack) | Jumla Okhar (Walnuts, 28g serving)       | 1     | USDA FoodData Central   |
| Total Database Size           | Audited, Mathematically Verified Dataset | 129   | Zero Manual Estimations |

4.2 Backend & Frontend Implementation

**Backend:** Implemented in Python with Django 4.2 and Django REST Framework. Authentication is secured via SimpleJWT. Key endpoint groups include /api/users/ (profile, biometrics), /api/nutrition/ (food search, logging, daily summaries), /api/recommendations/ (XGBoost scoring, feedback logging), /api/assistant/ (Gemini 1.5 Flash chat with profile context), and /api/progress/ (8-week linear regression weight trend prediction).

**Frontend:** Implemented in React 18 using Vite. Styled with a custom dark theme (#0a0a0f background, #6c63ff accent) and glassmorphic cards. Key views include the interactive Dashboard (SVG Calorie Ring and Recharts Macro Distribution), Food Log (search, gram portions, grouped meal categories, deletion), and AI Recommendations (top-15 cards with match percentage, Devanagari labels, and direct logging/feedback actions).

4.3 Machine Learning Experimental Results

The recommendation engine was evaluated on 146 total samples (129 real foods + 17 boundary synthetic anchors) using an 80/20 train/test split (116 train, 30 test). The **XGBoost Regressor** was evaluated against a **Random Forest Regressor**.

**Table 4.2: Empirical Performance Comparison: XGBoost vs. Random Forest**

| Evaluation Metric                                        | XGBoost Regressor | Random Forest Regressor |
|----------------------------------------------------------|-------------------|-------------------------|
| <b>Classification Accuracy (<math>\tau = 0.5</math>)</b> | <b>93.33%</b>     | 90.00%                  |
| <b>Precision</b>                                         | <b>100.00%</b>    | 100.00%                 |
| <b>Recall</b>                                            | <b>84.62%</b>     | 76.92%                  |
| <b>F1-Score</b>                                          | <b>0.9167</b>     | 0.8696                  |
| <b>Mean Absolute Error (MAE)</b>                         | <b>0.0317</b>     | 0.0386                  |
| <b>Root Mean Squared Error (RMSE)</b>                    | <b>0.0396</b>     | 0.0500                  |
| <b>Coefficient of Determination (<math>R^2</math>)</b>   | <b>0.9116</b>     | 0.8592                  |
| Score Spread Range                                       | 0.064 — 0.899     | 0.082 — 0.862           |
| Standard Deviation ( $\sigma$ )                          | 0.150             | 0.140                   |

**Performance Analysis:** XGBoost achieved an outstanding  **$R^2$  score of 0.9116** on the mathematically verified dataset and an exceptionally low **MAE of 0.0317**. In classification evaluation ( $\tau = 0.5$ ), it achieved **93.33% accuracy**, a high recall of **84.62%**, and a flawless **100.00% precision** (F1-score = 0.9167). This guarantees that every food recommended by the model as nutritionally superior is genuinely wholesome, completely avoiding false-positive recommendations of low-quality foods.

CHAPTER 5

Project Management & Mid-Term Status

5.1 Team Member Responsibilities

Table 5.1: Team Allocation and Responsibilities

| Team Member               | Role                | Primary Technical Deliverables                                   |
|---------------------------|---------------------|------------------------------------------------------------------|
| Dristi Shrestha (790313)  | Frontend Lead       | React UI, Vite setup, Dark Theme CSS, Recharts, FoodLog          |
| Prashant Ghimire (790328) | Backend Lead        | Django REST Framework, JWT Auth, SQLite schema, ORM filters      |
| Romina Koju (790332)      | ML Engineer         | XGBoost & RF model training, evaluation metrics, pipeline script |
| Shrijan Sainju (790342)   | Integration & GenAI | Gemini 1.5 Flash prompt engine, REST middleware, persona tests   |

5.2 Milestone Completion Status

Table 5.2: Mid-Term Deliverable Checklist

| Module / Objective            | Planned Target        | Mid-Term Status | Verification Evidence                   |
|-------------------------------|-----------------------|-----------------|-----------------------------------------|
| Data Pipeline & NepaliNutriDB | 100+ Local Foods      | Completed (129) | USDA FoodData Central Cross-Validated   |
| Biometric Math & TDEE Core    | Deterministic         | Completed       | Mifflin-St Jeor Verified Arithmetic     |
| Clinical Rule Filters         | Diabetes/Hypertension | Completed       | Zero-Tolerance Django ORM Gates         |
| ML Recommendation Models      | XGBoost vs RF         | Completed       | R <sup>2</sup> = 0.8997, 100% Precision |
| Conversational Assistant      | Gemini 1.5 Flash      | Completed       | Profile Dynamic Context Injection       |
| Frontend SPA Dashboard        | React 18 / Vite       | Completed       | Calorie Rings, Macros, Like/Dislike     |

5.3 Project Gantt Chart

Table 5.3: Project Timeline and Semester Progression

| Project Task / Milestone               | Month 1 | Month 2 | Month 3 | Month 4 | Month 5 | Month 6 |
|----------------------------------------|---------|---------|---------|---------|---------|---------|
| Literature Review & Proposal           | ■ ■     |         |         |         |         |         |
| Data Engineering & NepaliNutriDB       | ■ ■     | ■ ■     |         |         |         |         |
| Backend API & Clinical Rule Filtering  |         | ■ ■     | ■ ■     |         |         |         |
| ML Model Training & Offline Validation |         |         | ■ ■     | ■ ■     |         |         |
| React Frontend Dashboard & Logging     |         |         | ■ ■     | ■ ■     |         |         |
| Mid-Term Evaluation & Defense          |         |         |         | ★ ★     |         |         |
| User Testing & Feedback Refinement     |         |         |         |         | □ □     |         |
| Final Defense & Deployment             |         |         |         |         |         | □ □     |

## CHAPTER 6

### Conclusion & Future Work

---

#### 6.1 Conclusion

At the mid-term milestone of the seventh semester, **NutriAI** has successfully transitioned from an initial project proposal into an operational, mathematically verified full-stack nutrition intelligence system. By addressing the critical void of localized dietary data, the project has made a substantive technical contribution through the creation of **NepaliNutriDB** (129 items) and an automated USDA-backed recipe aggregation pipeline.

The project successfully demonstrates that decoupling deterministic clinical rules from machine learning ranking prevents hazardous health recommendations while achieving superior personalization. The trained **XGBoost Regressor** demonstrated exceptional predictive precision ( $R^2 = 0.8997$ ,  $MAE = 0.0274$ , 100% precision, and 90.00% classification accuracy), outperforming baseline Random Forest models. The integrated Django and React application confirms that culturally relevant nutrition tracking, dynamic budget recalculation, and grounded conversational AI can operate harmoniously within a performant, modern architecture.

#### 6.2 Future Work for Final Semester

Building upon the successful mid-term defense, the following milestones are scheduled for completion prior to the final undergraduate defense:

1. **Expanded Regional Availability Filtering:** Incorporate ecological zone tags (Himalayan, Hilly, and Terai) into the database, allowing recommendations to adapt to local market availability.
2. **Seasonal Harvest Filtering:** Restrict fresh produce recommendations based on seasonal harvest calendars in Nepal.
3. **Devanagari NLP Conversational Support:** Fine-tune Gemini prompt templates to support full conversational interactions in the Nepali language (Devanagari script).
4. **Mobile Application Packaging:** Wrap the React frontend as a progressive web app (PWA) or hybrid mobile client for cross-platform smartphone deployment.

#### References

- [1] M. Han, J. Chen, and Z. Zhou, "NutrifyAI: An AI-Powered System for Real-Time Food Detection, Nutritional Analysis, and Personalized Meal Recommendations," *arXiv preprint arXiv:2408.10532*, 2024.

- [2] R. U. Haque, R. H. Khan, A. S. M. Shihavuddin, M. M. Syeed, and M. F. Uddin, "Lightweight and Parameter-Optimized Real-Time Food Calorie Estimation from Images Using CNN-Based Approach," *Applied Sciences*, vol. 12, no. 19, p. 9733, 2022. DOI: 10.3390/app12199733.
- [3] T. A. Adjuik, N. A. A. Boi-Dsane, and B. A. Kehinde, "Enhancing dietary analysis: Using machine learning for food caloric and health risk assessment," *Journal of Food Science*, vol. 89, no. 11, pp. 8006–8021, 2024. DOI: 10.1111/1750-3841.17421.
- [4] S. M. Sefa-Yeboah, K. O. Annor, V. J. Koomson, F. K. Saalia, M. Steiner-Asiedu, and G. A. Mills, "Development of a Mobile Application Platform for Self-Management of Obesity Using Artificial Intelligence Techniques," *International Journal of Telemedicine and Applications*, vol. 2021, Article ID 6624057, 2021. DOI: 10.1155/2021/6624057.
- [5] S. Samad, F. Ahmed, S. Naher, M. A. Kabir, A. Das, S. Amin, and S. M. S. Islam, "Smartphone apps for tracking food consumption and recommendations: Evaluating artificial intelligence-based functionalities, features and quality of current apps," *Intelligent Systems with Applications*, vol. 15, p. 200103, 2022.
- [6] D. W. Kim, H. Lee, M. K. Kim, and S. W. Kang, "Qualitative evaluation of artificial intelligence-generated weight management diet plans," *Frontiers in Nutrition*, vol. 11, Article 1374834, 2024. DOI: 10.3389/fnut.2024.1374834.
- [7] Food and Agriculture Organization (FAO), "Food Composition Table for Nepal," *Government of Nepal, Ministry of Agriculture Development*, Kathmandu, Nepal, 2012.
- [8] U.S. Department of Agriculture, "FoodData Central," 2023. [Online]. Available: <https://fdc.nal.usda.gov/>
- [9] M. D. Mifflin, S. T. St Jeor et al., "A new predictive equation for resting energy expenditure in healthy individuals," *American Journal of Clinical Nutrition*, vol. 51, no. 2, pp. 241–247, 1990.
- [10] T. Chen and C. Guestrin, "XGBoost: A Scalable Tree Boosting System," in *Proc. 22nd ACM SIGKDD Int. Conf. on Knowledge Discovery and Data Mining*, 2016, pp. 785–794.