


1 - Pegar o sistema desenvolvido em WEB I e transformá-lo para Laravel

1.1 - usar layouts utilizados na disciplina(flex-box, grid-layouts) - todas as views = 1ª entrega dia 07/12 = valor 2,00


#Layout

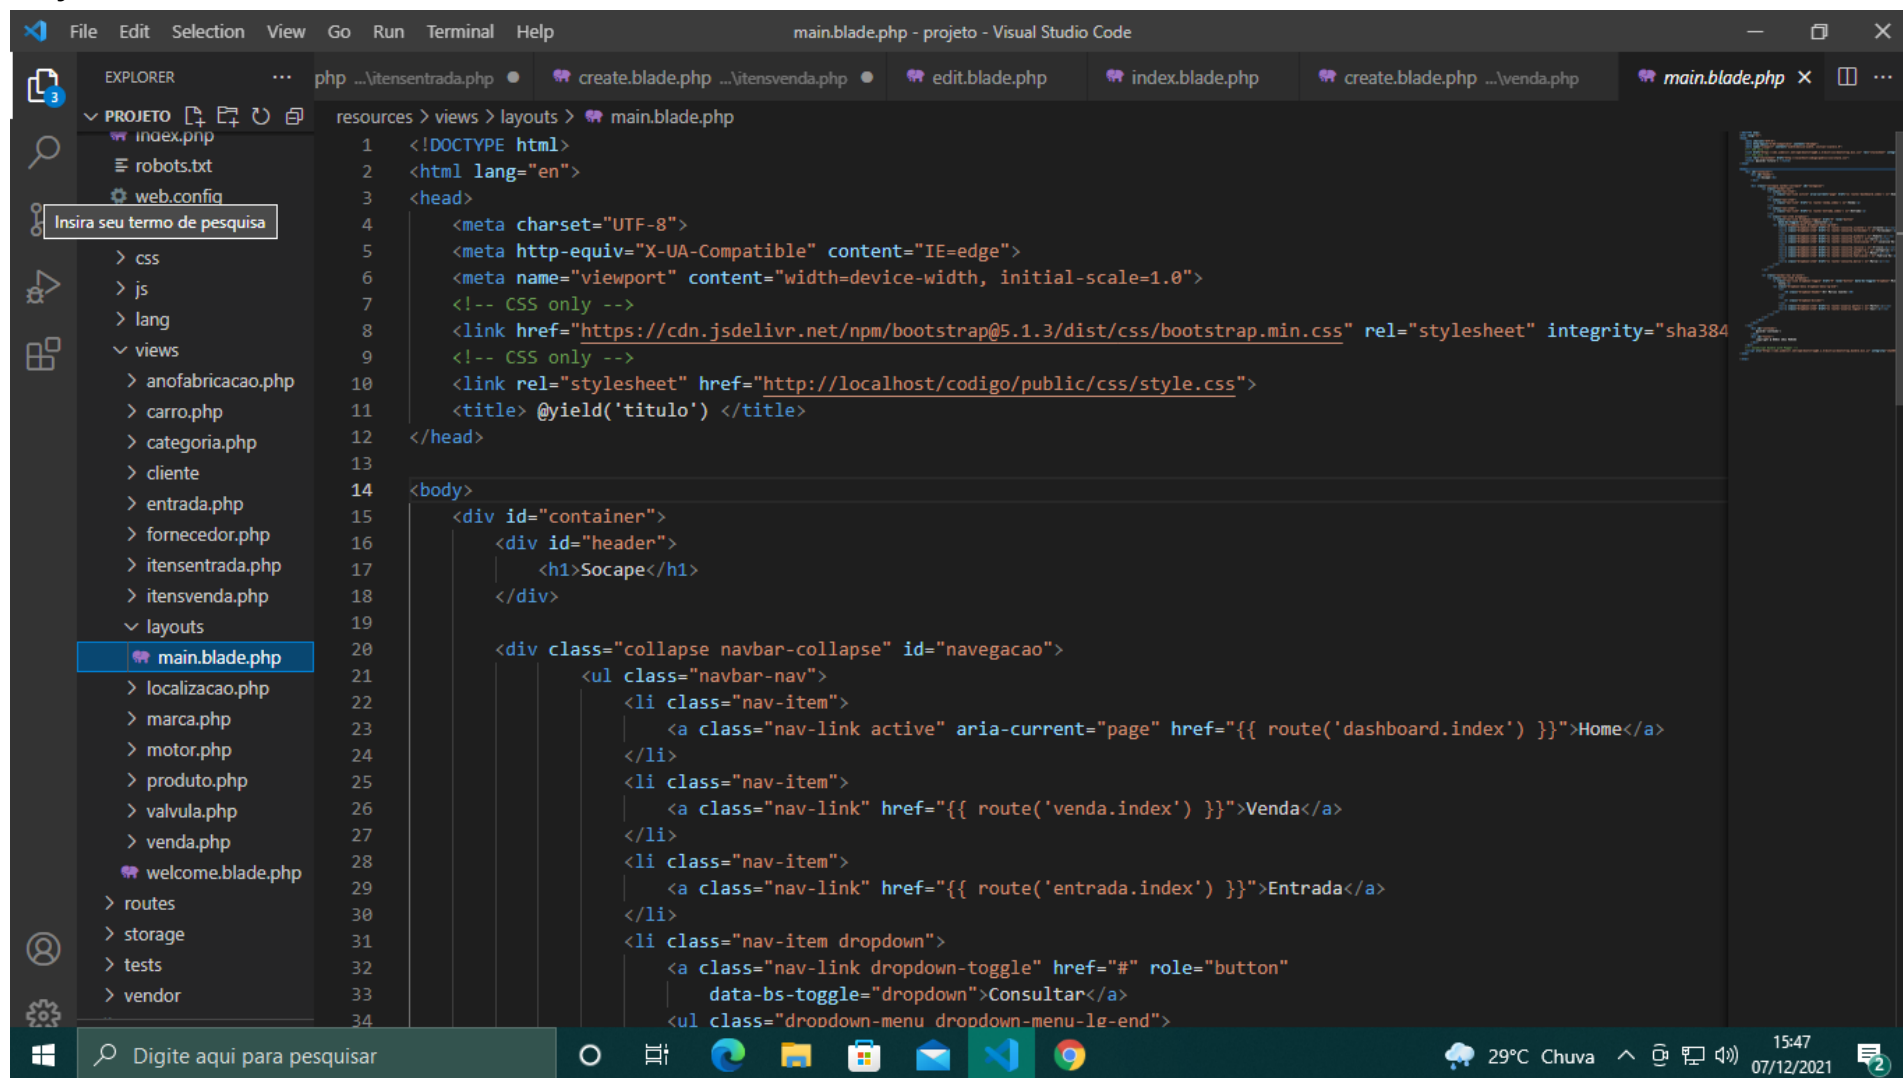


The image shows a screenshot of the Visual Studio Code editor with a Laravel project open. The Explorer panel on the left shows the file structure, with the 'views' directory expanded and 'main.blade.php' selected. The main editor area displays the content of 'main.blade.php', which is a Blade template for a web application. The template includes a DOCTYPE declaration, a head section with meta tags for charset, viewport, and CSS/JS links, and a body section with a container div. Inside the container, there is a header div with an h1 tag and a navigation bar div with a list of links for Home, Venda, Entrada, and Consultar. The navigation bar uses Bootstrap classes for styling and Laravel routing for the links.

```
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <meta charset="UTF-8">
5   <meta http-equiv="X-UA-Compatible" content="IE=edge">
6   <meta name="viewport" content="width=device-width, initial-scale=1.0">
7   <!-- CSS only -->
8   <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/css/bootstrap.min.css" rel="stylesheet" integrity="sha384"
9   <!-- CSS only -->
10  <link rel="stylesheet" href="http://localhost/codigo/public/css/style.css">
11  <title> @yield('titulo') </title>
12 </head>
13
14 <body>
15   <div id="container">
16     <div id="header">
17       <h1>Socape</h1>
18     </div>
19
20     <div class="collapse navbar-collapse" id="navegacao">
21       <ul class="navbar-nav">
22         <li class="nav-item">
23           <a class="nav-link active" aria-current="page" href="{{ route('dashboard.index') }}">Home</a>
24         </li>
25         <li class="nav-item">
26           <a class="nav-link" href="{{ route('venda.index') }}">Venda</a>
27         </li>
28         <li class="nav-item">
29           <a class="nav-link" href="{{ route('entrada.index') }}">Entrada</a>
30         </li>
31         <li class="nav-item dropdown">
32           <a class="nav-link dropdown-toggle" href="#" role="button"
33             data-bs-toggle="dropdown">Consultar</a>
34           <ul class="dropdown-menu dropdown-menu-le-end">
```

#Style

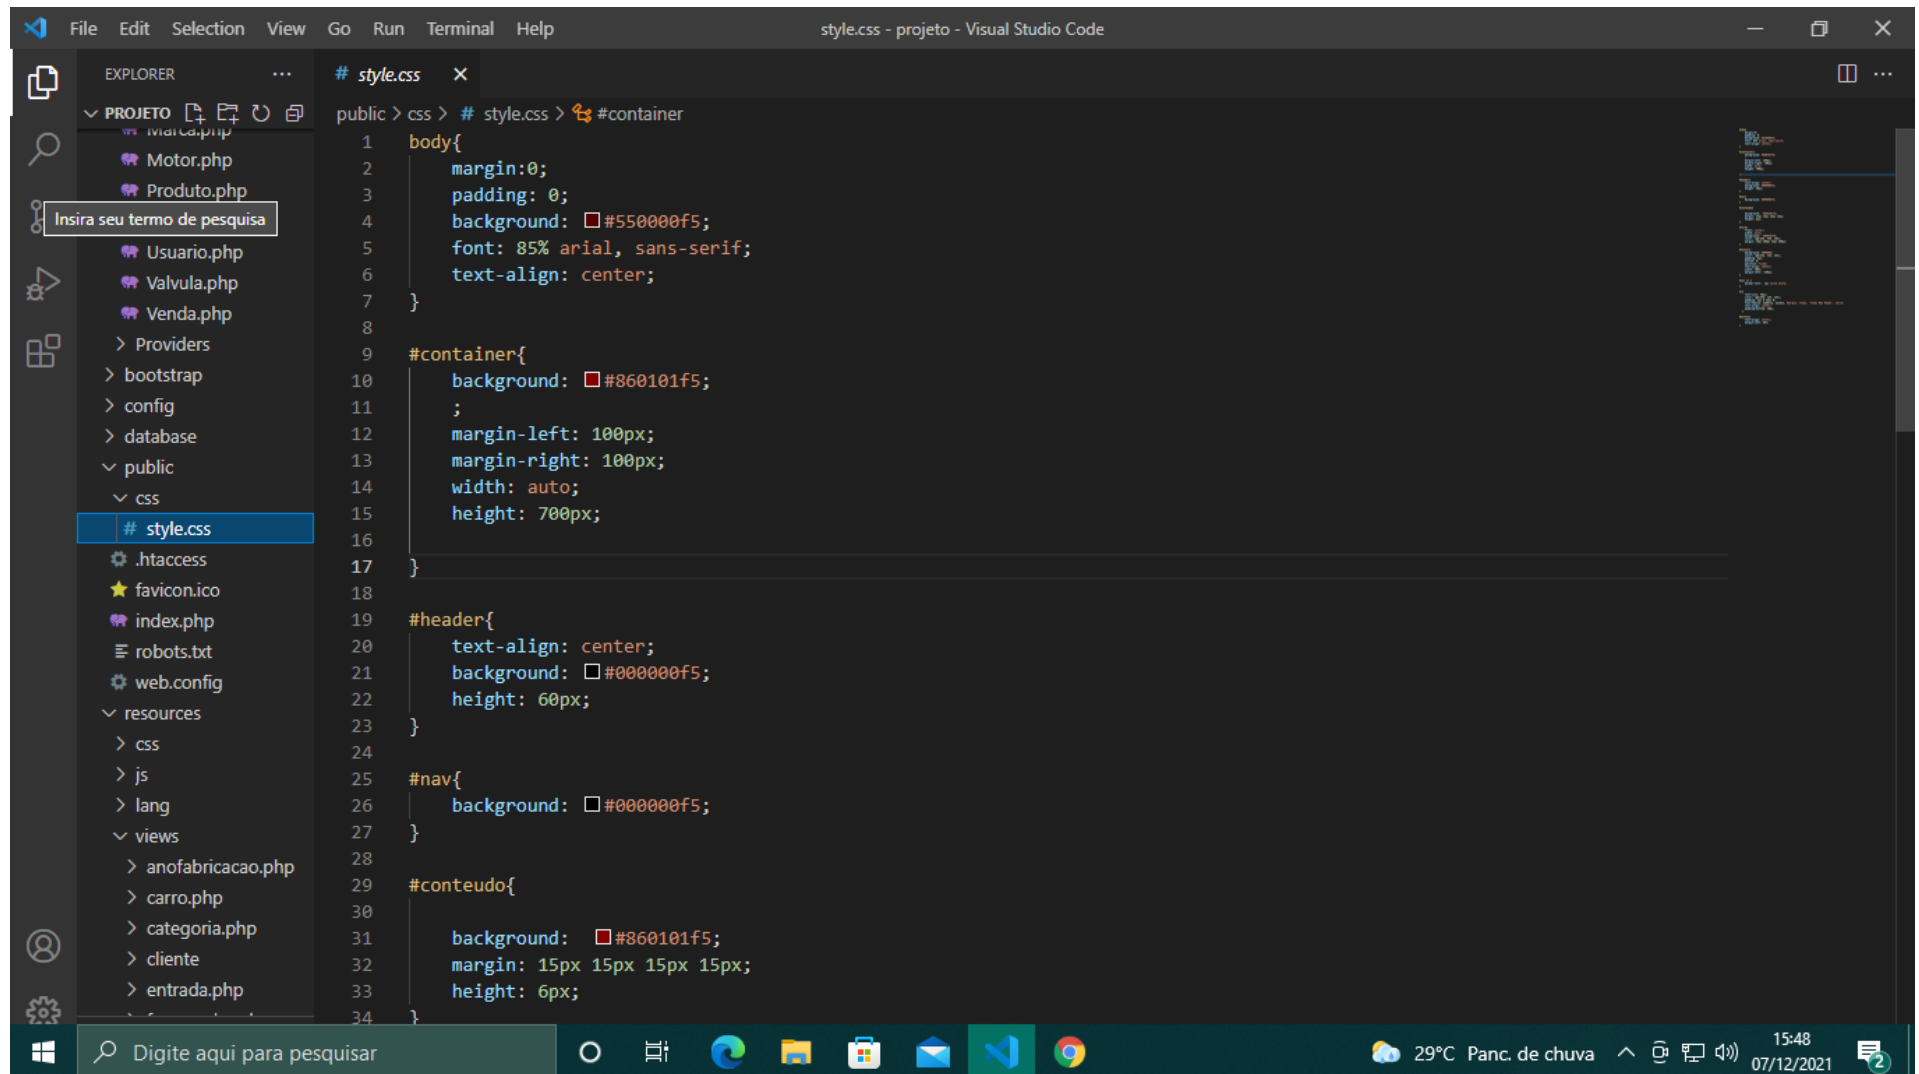


#Fornecedor

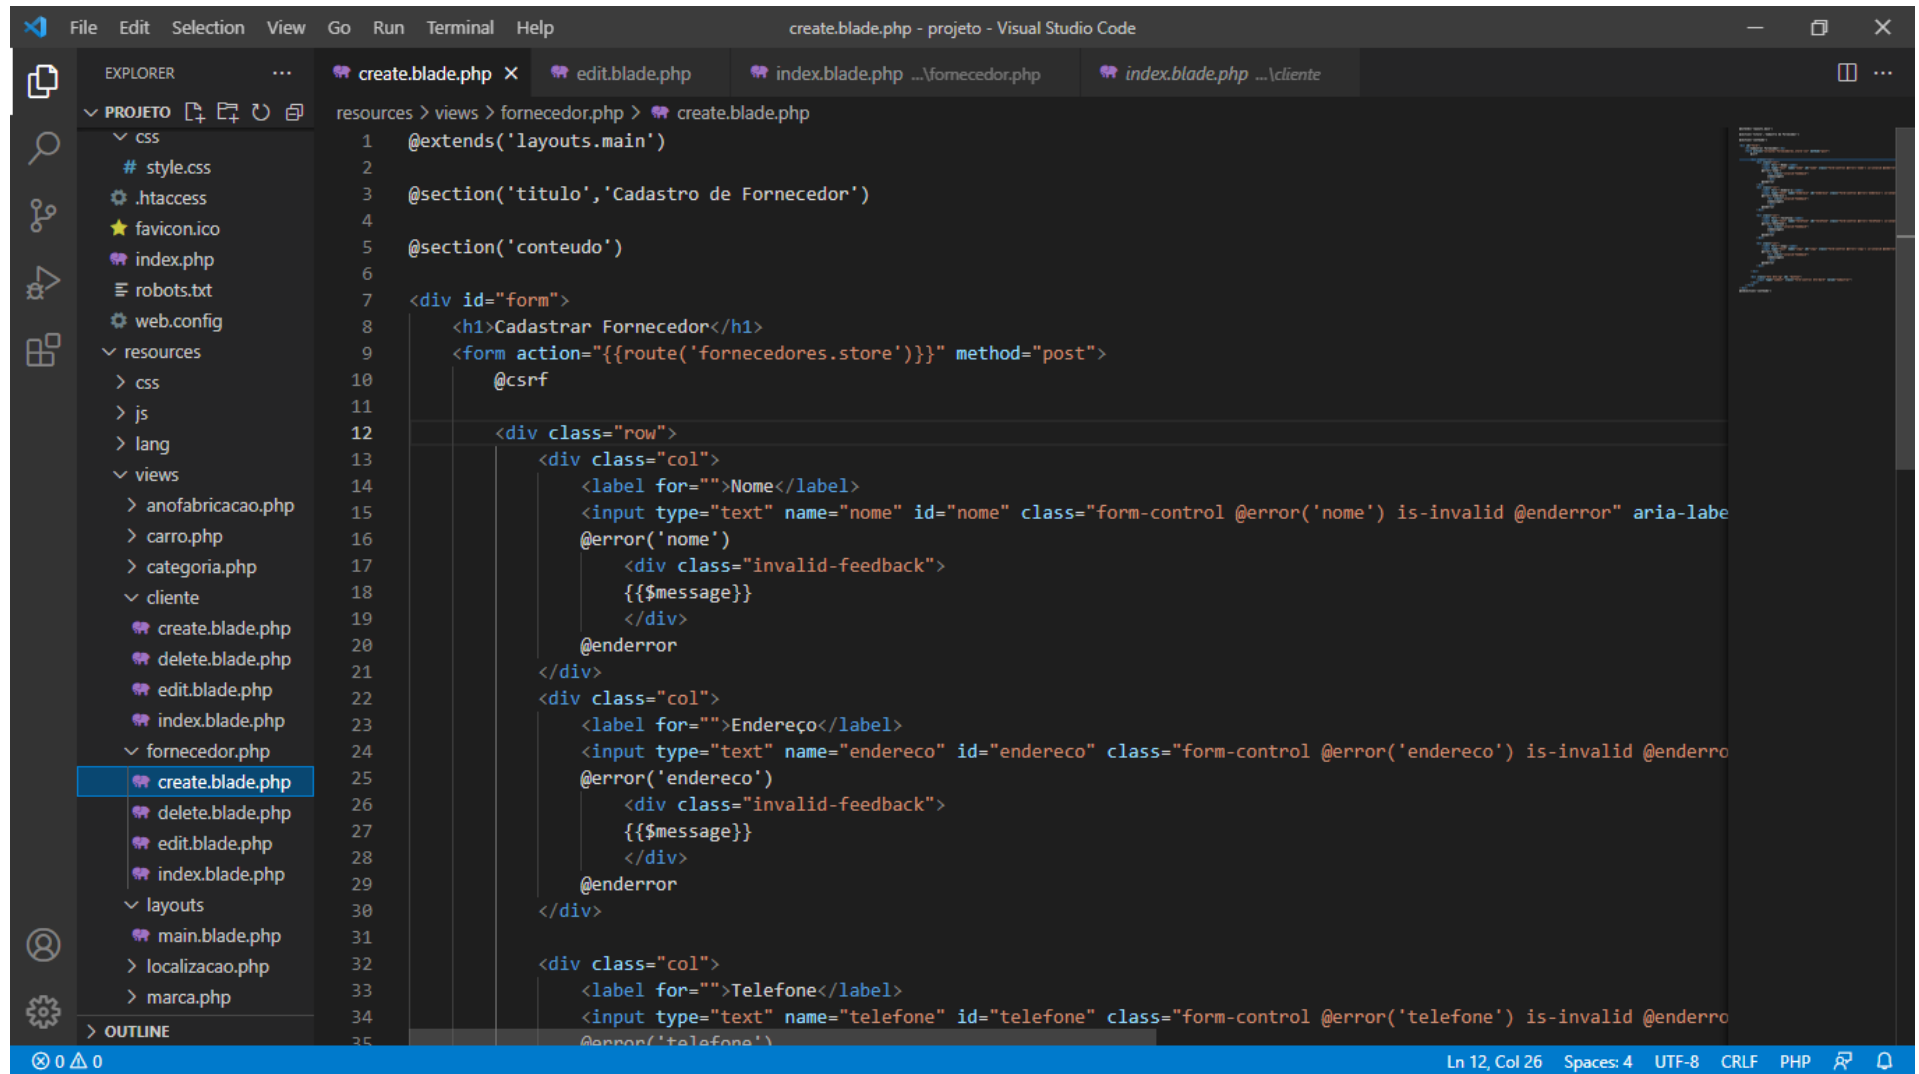

The image shows a Visual Studio Code editor window with the title "create.blade.php - projeto - Visual Studio Code". The Explorer sidebar on the left shows a project structure with folders for "css", "resources", and "views". The "views" folder is expanded, showing a sub-folder "fornecedor.php" which contains the file "create.blade.php" currently selected. The main editor area displays the content of "create.blade.php", which is a Blade template for a supplier registration form. The template extends the "layouts.main" layout and defines two sections: "titulo" and "conteudo". The "conteudo" section contains a form with three input fields: "nome", "endereco", and "telefone". Each field has a label, an input element, and a feedback div for error messages. The form uses Laravel's Blade syntax for sections and includes CSRF protection. The status bar at the bottom indicates the cursor is at line 12, column 26, with 4 spaces, UTF-8 encoding, and CRLF line endings.

```
1 @extends('layouts.main')
2
3 @section('titulo','Cadastro de Fornecedor')
4
5 @section('conteudo')
6
7 <div id="form">
8     <h1>Cadastrar Fornecedor</h1>
9     <form action="{{route('fornecedores.store')}}" method="post">
10         @csrf
11
12         <div class="row">
13             <div class="col">
14                 <label for="">Nome</label>
15                 <input type="text" name="nome" id="nome" class="form-control @error('nome') is-invalid @enderror" aria-label="Nome" />
16                 @error('nome')
17                     <div class="invalid-feedback">
18                         {{$message}}
19                     </div>
20                 @enderror
21             </div>
22             <div class="col">
23                 <label for="">Endereço</label>
24                 <input type="text" name="endereco" id="endereco" class="form-control @error('endereco') is-invalid @enderror" />
25                 @error('endereco')
26                     <div class="invalid-feedback">
27                         {{$message}}
28                     </div>
29                 @enderror
30             </div>
31             <div class="col">
32                 <label for="">Telefone</label>
33                 <input type="text" name="telefone" id="telefone" class="form-control @error('telefone') is-invalid @enderror" />
34                 @error('telefone')
35                     <div class="invalid-feedback">
36                         {{$message}}
37                     </div>
38                 @enderror
39             </div>
40         </div>
41     </form>
42 </div>
```

#Cliente

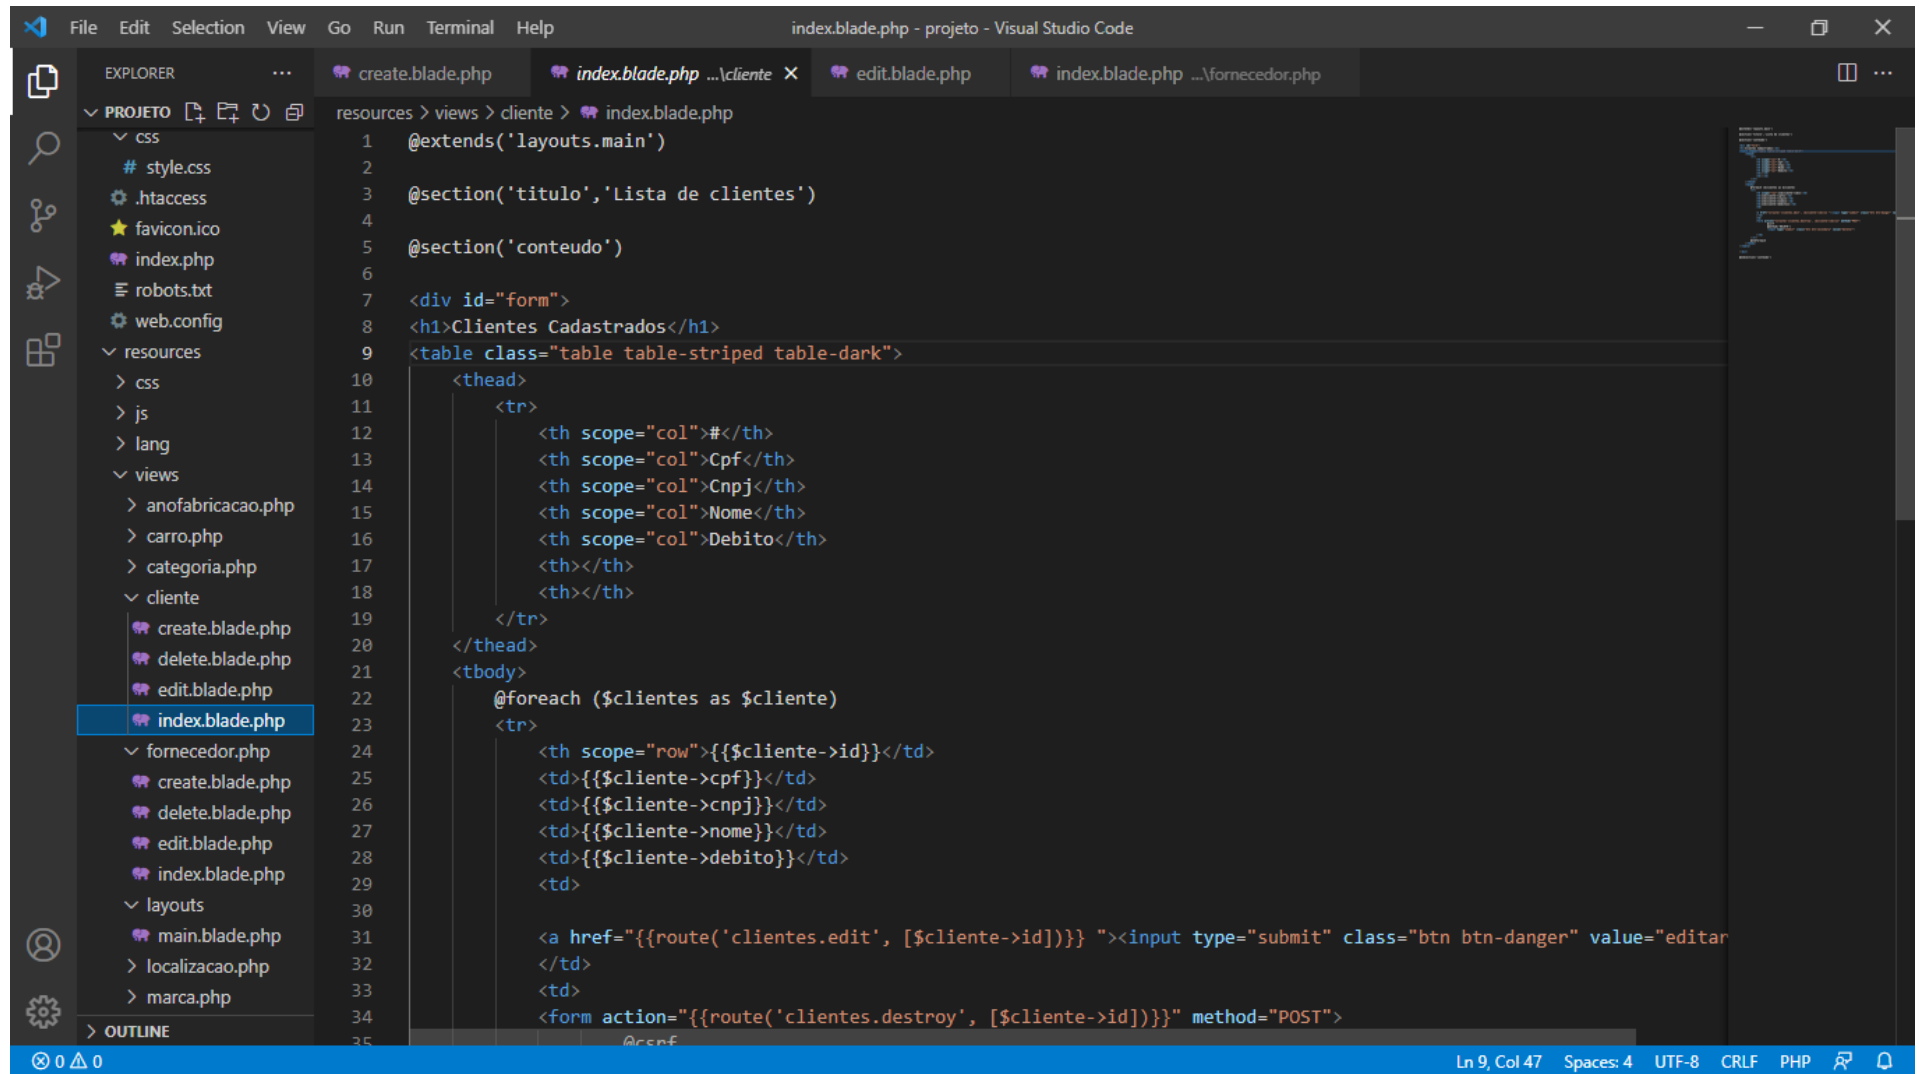


The image shows a Visual Studio Code editor window with the title "index.blade.php - projeto - Visual Studio Code". The Explorer sidebar on the left shows a project structure with folders "css", "resources", and "views". The "views" folder is expanded, showing subfolders "cliente" and "fornecedor". The "cliente" folder contains "create.blade.php", "delete.blade.php", "edit.blade.php", and "index.blade.php". The "index.blade.php" file is selected and its content is displayed in the main editor area. The code is a Laravel Blade template that extends the "layouts.main" layout. It defines a section titled "Lista de clientes" and a content section. The content section contains a table with the following structure:

```
1 @extends('layouts.main')
2
3 @section('titulo','Lista de clientes')
4
5 @section('conteudo')
6
7 <div id="form">
8 <h1>Clientes Cadastrados</h1>
9 <table class="table table-striped table-dark">
10 <thead>
11 <tr>
12 <th scope="col">#</th>
13 <th scope="col">Cpf</th>
14 <th scope="col">Cnpj</th>
15 <th scope="col">Nome</th>
16 <th scope="col">Debito</th>
17 <th></th>
18 <th></th>
19 </tr>
20 </thead>
21 <tbody>
22 @foreach ($clientes as $cliente)
23 <tr>
24 <th scope="row">{{ $cliente->id }}</th>
25 <td>{{ $cliente->cpf }}</td>
26 <td>{{ $cliente->cnpj }}</td>
27 <td>{{ $cliente->nome }}</td>
28 <td>{{ $cliente->debito }}</td>
29 <td>
30 <a href="{{ route('clientes.edit', [$cliente->id]) }}" "><input type="submit" class="btn btn-danger" value="editar"
31 </td>
32 <td>
33 <form action="{{ route('clientes.destroy', [$cliente->id]) }}" method="POST">
34 @csrf
35
```

The status bar at the bottom indicates the current position is Line 9, Column 47, with 4 spaces, UTF-8 encoding, CRLF line endings, and the PHP language mode.

#Produto

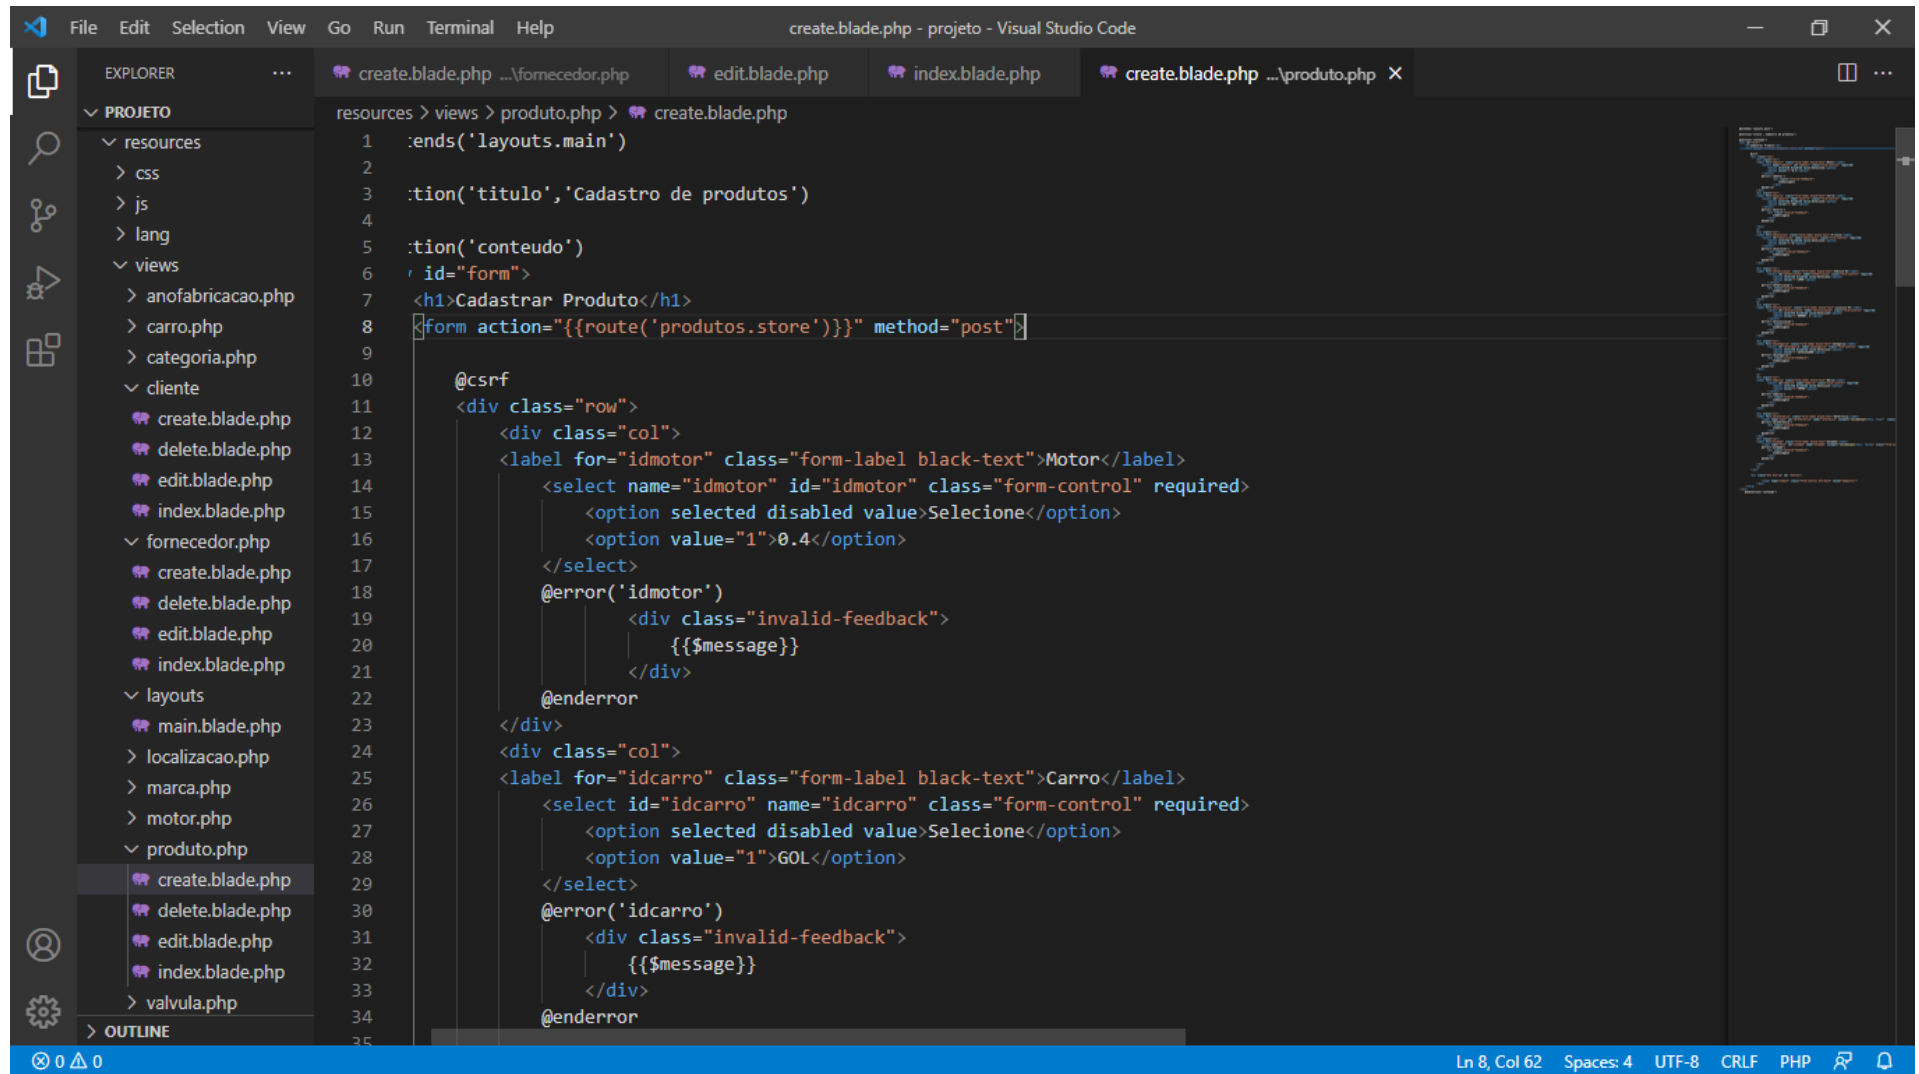

```
1 :ends('layouts.main')
2
3 :tion('titulo','Cadastro de produtos')
4
5 :tion('conteudo')
6 <div id="form">
7 <h1>Cadastrar Produto</h1>
8 <form action="{{route('produtos.store')}}" method="post">
9
10 @csrf
11 <div class="row">
12 <div class="col">
13 <label for="idmotor" class="form-label black-text">Motor</label>
14 <select name="idmotor" id="idmotor" class="form-control" required>
15 <option selected disabled value>Selecione</option>
16 <option value="1">0.4</option>
17 </select>
18 @error('idmotor')
19 <div class="invalid-feedback">
20 {{ $message }}
21 </div>
22 @enderror
23 </div>
24 <div class="col">
25 <label for="idcarro" class="form-label black-text">Carro</label>
26 <select id="idcarro" name="idcarro" class="form-control" required>
27 <option selected disabled value>Selecione</option>
28 <option value="1">GOL</option>
29 </select>
30 @error('idcarro')
31 <div class="invalid-feedback">
32 {{ $message }}
33 </div>
34 @enderror
35
```

Ln 8, Col 62 Spaces: 4 UTF-8 CRLF PHP

#Fabricação

The image shows a Visual Studio Code editor window with the title bar "create.blade.php - projeto - Visual Studio Code". The Explorer sidebar on the left shows a project structure with folders for "css" (containing "style.css") and "resources" (containing "css", "js", "lang", and "views"). The "views" folder is expanded, showing a sub-folder "anofabricacao.php" which contains several Blade templates: "create.blade.php", "delete.blade.php", "edit.blade.php", "index.blade.php", "carro.php", "categoria.php", "cliente.php", "entrada.php", "fornecedor.php", "itensentrada.php", "itensvenda.php", "layouts", "localizacao.php", "marca.php", "motor.php", and "produto.php". A search bar in the Explorer sidebar contains the text "Insira seu termo de pesquisa".

The main editor area displays the content of "resources > views > anofabricacao.php > create.blade.php". The code is a Laravel Blade template with the following structure:

```
1 @extends('layouts.main')
2
3 @section('titulo', 'Fabricação')
4
5 @section('conteudo')
6
7 <div id="form">
8   <h1>Cadastro de Fabricação</h1>
9   <form action="{{route('anofabricacao.store')}}" method="post" >
10     @csrf
11     <div class="row">
12       <div class="col">
13         <label for="">Ano</label>
14         <input type="text" name="anofabricacao" id="anofabricacao" class="form-control @error('anofabricacao') is-i
15         @error('anofabricacao')
16         <div class="invalid-feedback">
17           {{ $message }}
18         </div>
19       @enderror
20     </div>
21   </div>
22   <div class="btn btn-lg id= "button">
23     <input type="submit" class="form-control btn-dark" value="Cadastrar">
24   </div>
25 </form>
26
27 </div>
28 @endsection('conteudo')
29
```

The Windows taskbar at the bottom shows the system clock as 15:29 on 07/12/2021, with weather information indicating 29°C and "Chuva" (Rain).

#Carro

The image shows a Visual Studio Code editor window with the title bar "create.blade.php - projeto - Visual Studio Code". The Explorer sidebar on the left shows a project structure with folders like "css", "resources", and "views". The "views" folder is expanded, showing a "carro.php" file which is selected. A search bar in the Explorer sidebar contains the text "Insira seu termo de pesquisa".

The main editor area displays the content of "create.blade.php" with the following code:

```
1 @extends('layouts.main')
2
3 @section('titulo','Cadastro de Carros')
4
5 @section('conteudo')
6
7 <div id="form">
8 <h1>Cadastro de Carros</h1>
9
10 <form action="{{route('carro.store')}}" method="post" >
11     @csrf
12     <div class="row">
13         <div class="col">
14             <label for="">Modelo</label>
15             <input type="text" name="modelo" id="modelo" class="form-control @error('modelo') is-invalid @enderror"
16                 @error('modelo')
17                 <div class="invalid-feedback">
18                     {{ $message }}
19                 </div>
20             @enderror
21         </div>
22         <div class="btn btn-lg id= "button">
23             <input type="submit" class="form-control btn-dark" value="Cadastrar">
24         </div>
25     </form>
26
27 </div>
28 @endsection('conteudo')
29
```

The status bar at the bottom shows the Windows taskbar with various icons, a search bar with the text "Digite aqui para pesquisar", and system information including "29°C Chuva", "15:37", and "07/12/2021".

#Entrada

The screenshot displays the Visual Studio Code interface with the following details:


- Explorer Panel:** Shows the project structure with folders like 'resources' and 'views'. The file 'entrada.php' is selected under 'resources > views'.
- Editor Panel:** Displays the content of 'entrada.php'. The code is a Blade template with the following structure:

```
1 @extends('layouts.main')
2
3 @section('title', 'Entrada')
4
5 @section('conteudo')
6
7     <span class="display-6">Entradas</span>
8
9
10    <section class="d-flex justify-content-center">
11        <form id="realizarEntrada" method="GET" action="{{ route('entrada.itensentrada') }}">
12            <div class="row align-items-end mb-3 d-flex">
13                <div class="col">
14                    <label for="barraPesquisa" class="form-label black-text">FORNECEDOR</label>
15                    <input type="text" placeholder="FORNECEDOR" class="form-control" id="barraPesquisa" aria-describedby="f">
16                    <input id="idfornecedor" name="idfornecedor" type="hidden" required>
17                    <div id="fornecedorHelp" class="form-text">Digite o nome do fornecedor e selecione-o na lista.</div>
18                </div>
19                <div class="col">
20                    <button type="submit" class="btn btn-dark">DAR ENTRADA</button>
21                </div>
22            </div>
23        </form>
24    </section>
25
26    <section class="container-fluid text-start mb-5">
27        <div class="table-responsive-lg">
28            <table class="table table-hover">
29                <thead>
30                    <tr>
31                        <th scope="col">#</th>
32                        <th scope="col">FORNECEDOR</th>
33                        <th scope="col">DATA</th>
34                        <th scope="col">STATUS</th>
35                        <th scope="col">ITEMS</th>
36                    </tr>
37                </thead>
38            </table>
39        </div>
40    </section>
41</section>
```
- Output Panel:** On the right, it shows the rendered HTML output of the Blade template, including the search form and the table structure.

#ItensEntrada

```
1 @extends('layouts.main')
2
3 @section('title', 'Itens entrada')
4
5 @section('conteudo')
6
7     <span class="display-6">ITENS - ENTRADA</span>
8
9
10     <div class="row">
11         <p class="display-6 ms-auto">INFORMAÇÕES DO FORNECEDOR</p>
12     </div>
13
14     <div class="row">
15         <div class="col">
16             <label for="nomeFornecedor" class="form-label black-text">NOME</label>
17             <input type="text" id="nomeFornecedor" class="form-control" value="{{ $fornecedor->nome }}" disabled>
18         </div>
19         <div class="col">
20             <label for="enderecoFornecedor" class="form-label black-text">ENDEREÇO</label>
21             <input type="text" id="enderecoFornecedor" class="form-control" value="{{ $fornecedor->endereco }}" disabled>
22         </div>
23         <div class="col">
24             <label for="telefoneFornecedor" class="form-label black-text">TELEFONE</label>
25             <input type="text" id="telefoneFornecedor" class="form-control" value="{{ $fornecedor->telefone }}" disabled>
26         </div>
27         <div class="col">
28             <label for="cnpjFornecedor" class="form-label black-text">CNPJ</label>
29             <input type="text" id="cnpjFornecedor" class="form-control" value="{{ $fornecedor->cnpj }}" disabled>
30         </div>
31     </div>
32 </section>
33 <section class="text-start mb-3">
34     <div class="row">
35         <p class="display-6 ms-auto">INSTR. ITENS</p>
```

#Venda

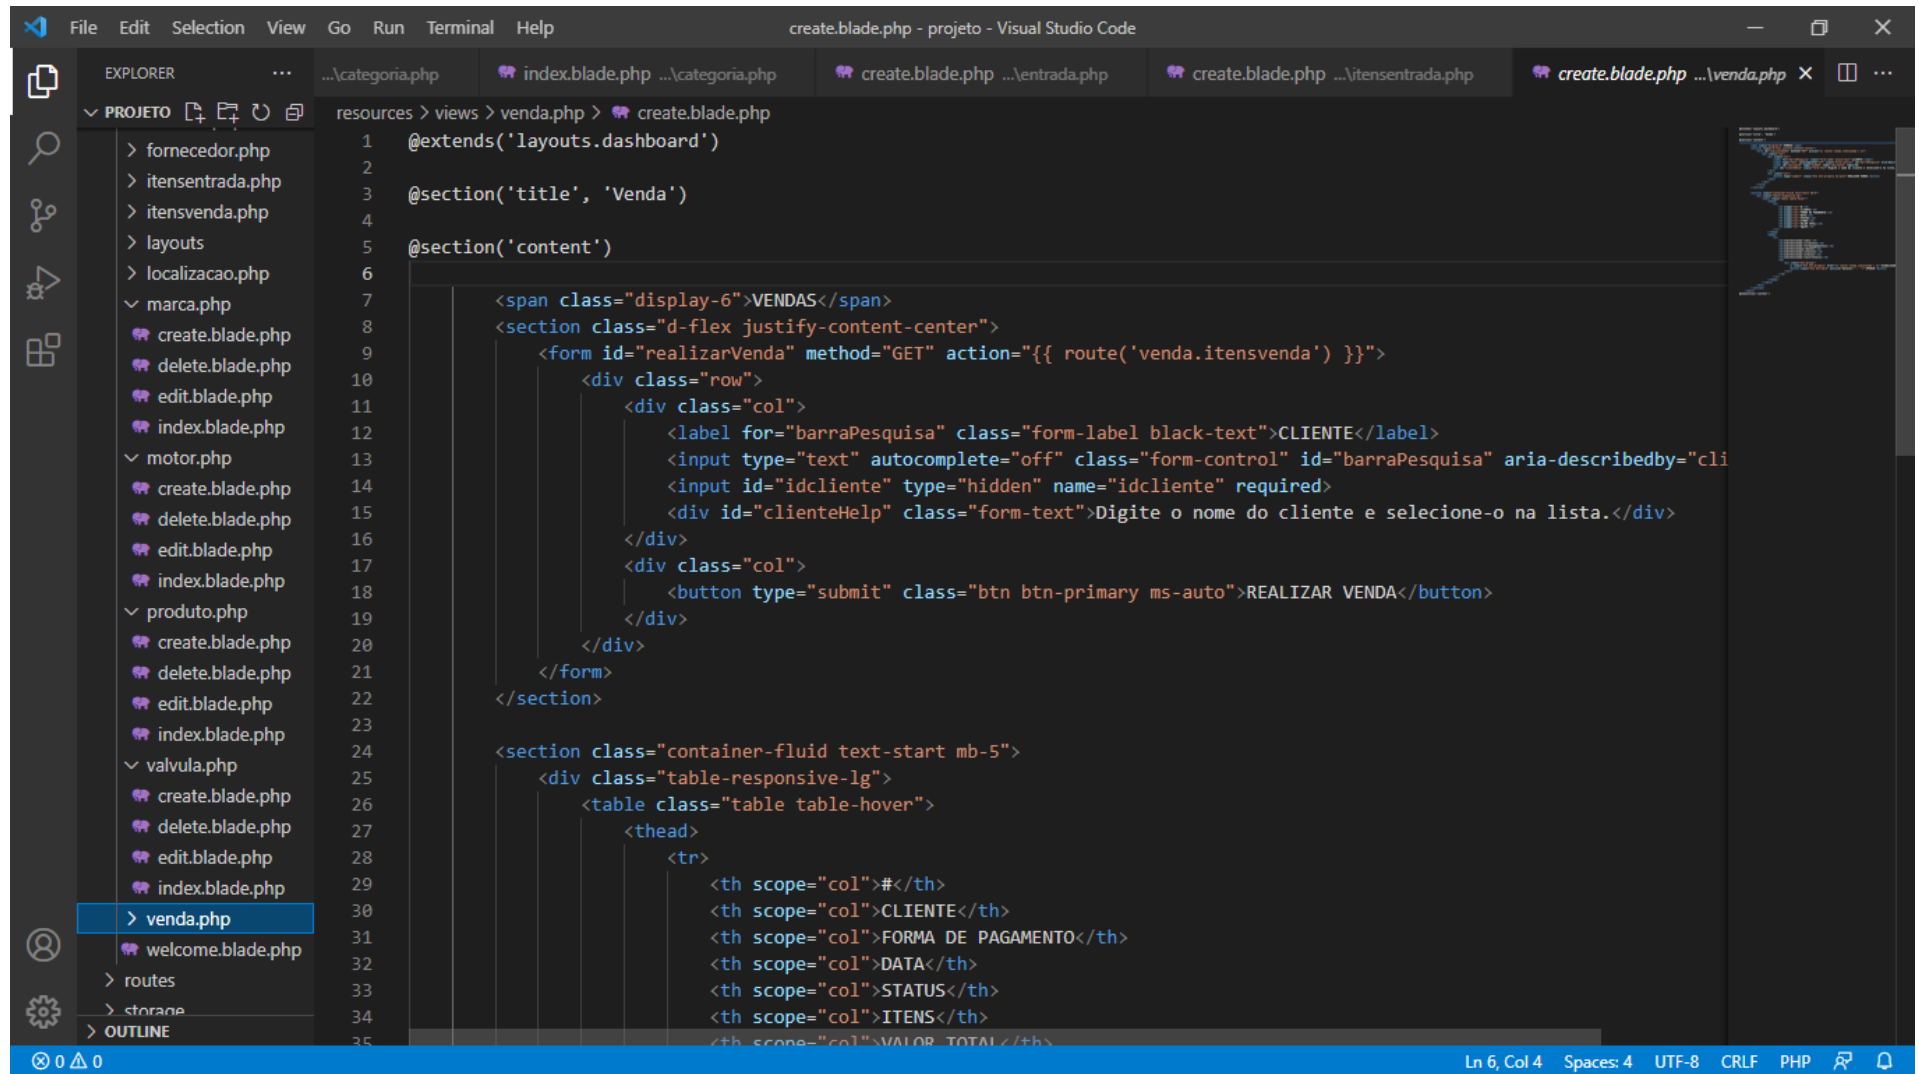


The image shows a Visual Studio Code editor window with the file explorer on the left and the code editor in the center. The file explorer shows a project structure with folders like 'resources', 'views', and 'venda.php'. The code editor displays the content of 'venda.php', which is a Blade template. The template extends 'layouts.dashboard' and defines sections for 'title' and 'content'. The 'content' section contains a form for making a sale, including a search bar for clients, a submit button, and a table for displaying sale details.

```
1 @extends('layouts.dashboard')
2
3 @section('title', 'Venda')
4
5 @section('content')
6
7     <span class="display-6">VENDAS</span>
8     <section class="d-flex justify-content-center">
9         <form id="realizarVenda" method="GET" action="{{ route('venda.itensvenda') }}">
10             <div class="row">
11                 <div class="col">
12                     <label for="barraPesquisa" class="form-label black-text">CLIENTE</label>
13                     <input type="text" autocomplete="off" class="form-control" id="barraPesquisa" aria-describedby="cli
14                     <input id="idcliente" type="hidden" name="idcliente" required>
15                     <div id="clienteHelp" class="form-text">Digite o nome do cliente e selecione-o na lista.</div>
16                 </div>
17                 <div class="col">
18                     <button type="submit" class="btn btn-primary ms-auto">REALIZAR VENDA</button>
19                 </div>
20             </div>
21         </form>
22     </section>
23
24     <section class="container-fluid text-start mb-5">
25         <div class="table-responsive-lg">
26             <table class="table table-hover">
27                 <thead>
28                     <tr>
29                         <th scope="col">#</th>
30                         <th scope="col">CLIENTE</th>
31                         <th scope="col">FORMA DE PAGAMENTO</th>
32                         <th scope="col">DATA</th>
33                         <th scope="col">STATUS</th>
34                         <th scope="col">ITENS</th>
35                         <th scope="col">VALOR TOTAL</th>
36                     </tr>
37                 </thead>
38             </table>
39         </div>
40     </section>
41 </section>
```


Ln 6, Col 4 Spaces: 4 UTF-8 CRLF PHP

#ItensVenda

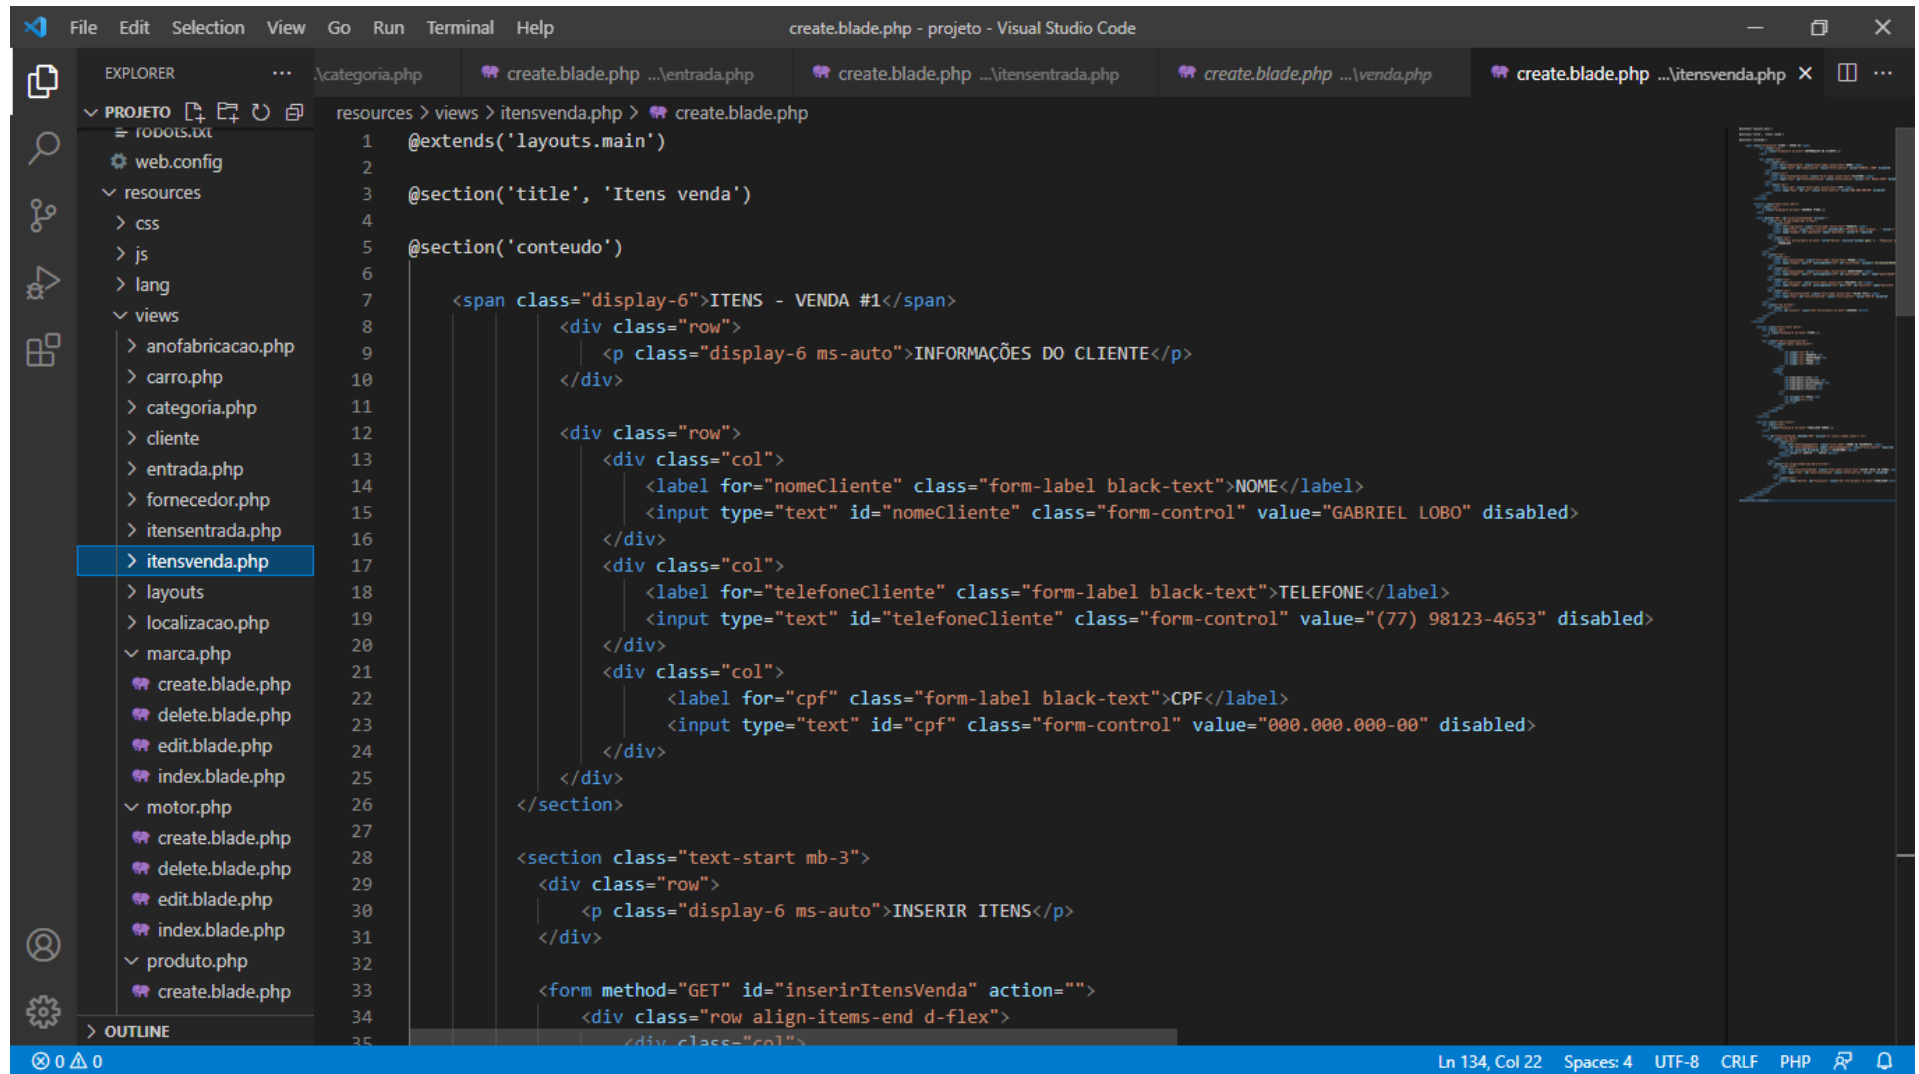

```
1 @extends('layouts.main')
2
3 @section('title', 'Itens venda')
4
5 @section('conteudo')
6
7     <span class="display-6">ITENS - VENDA #1</span>
8
9     <div class="row">
10         <p class="display-6 ms-auto">INFORMAÇÕES DO CLIENTE</p>
11     </div>
12
13     <div class="row">
14         <div class="col">
15             <label for="nomeCliente" class="form-label black-text">NOME</label>
16             <input type="text" id="nomeCliente" class="form-control" value="GABRIEL LOBO" disabled>
17         </div>
18         <div class="col">
19             <label for="telefoneCliente" class="form-label black-text">TELEFONE</label>
20             <input type="text" id="telefoneCliente" class="form-control" value="(77) 98123-4653" disabled>
21         </div>
22         <div class="col">
23             <label for="cpf" class="form-label black-text">CPF</label>
24             <input type="text" id="cpf" class="form-control" value="000.000.000-00" disabled>
25         </div>
26     </div>
27
28     <section class="text-start mb-3">
29         <div class="row">
30             <p class="display-6 ms-auto">INSERIR ITENS</p>
31         </div>
32
33         <form method="GET" id="inserirItensVenda" action="">
34             <div class="row align-items-end d-flex">
35                 <div class="col">
```


#Localização

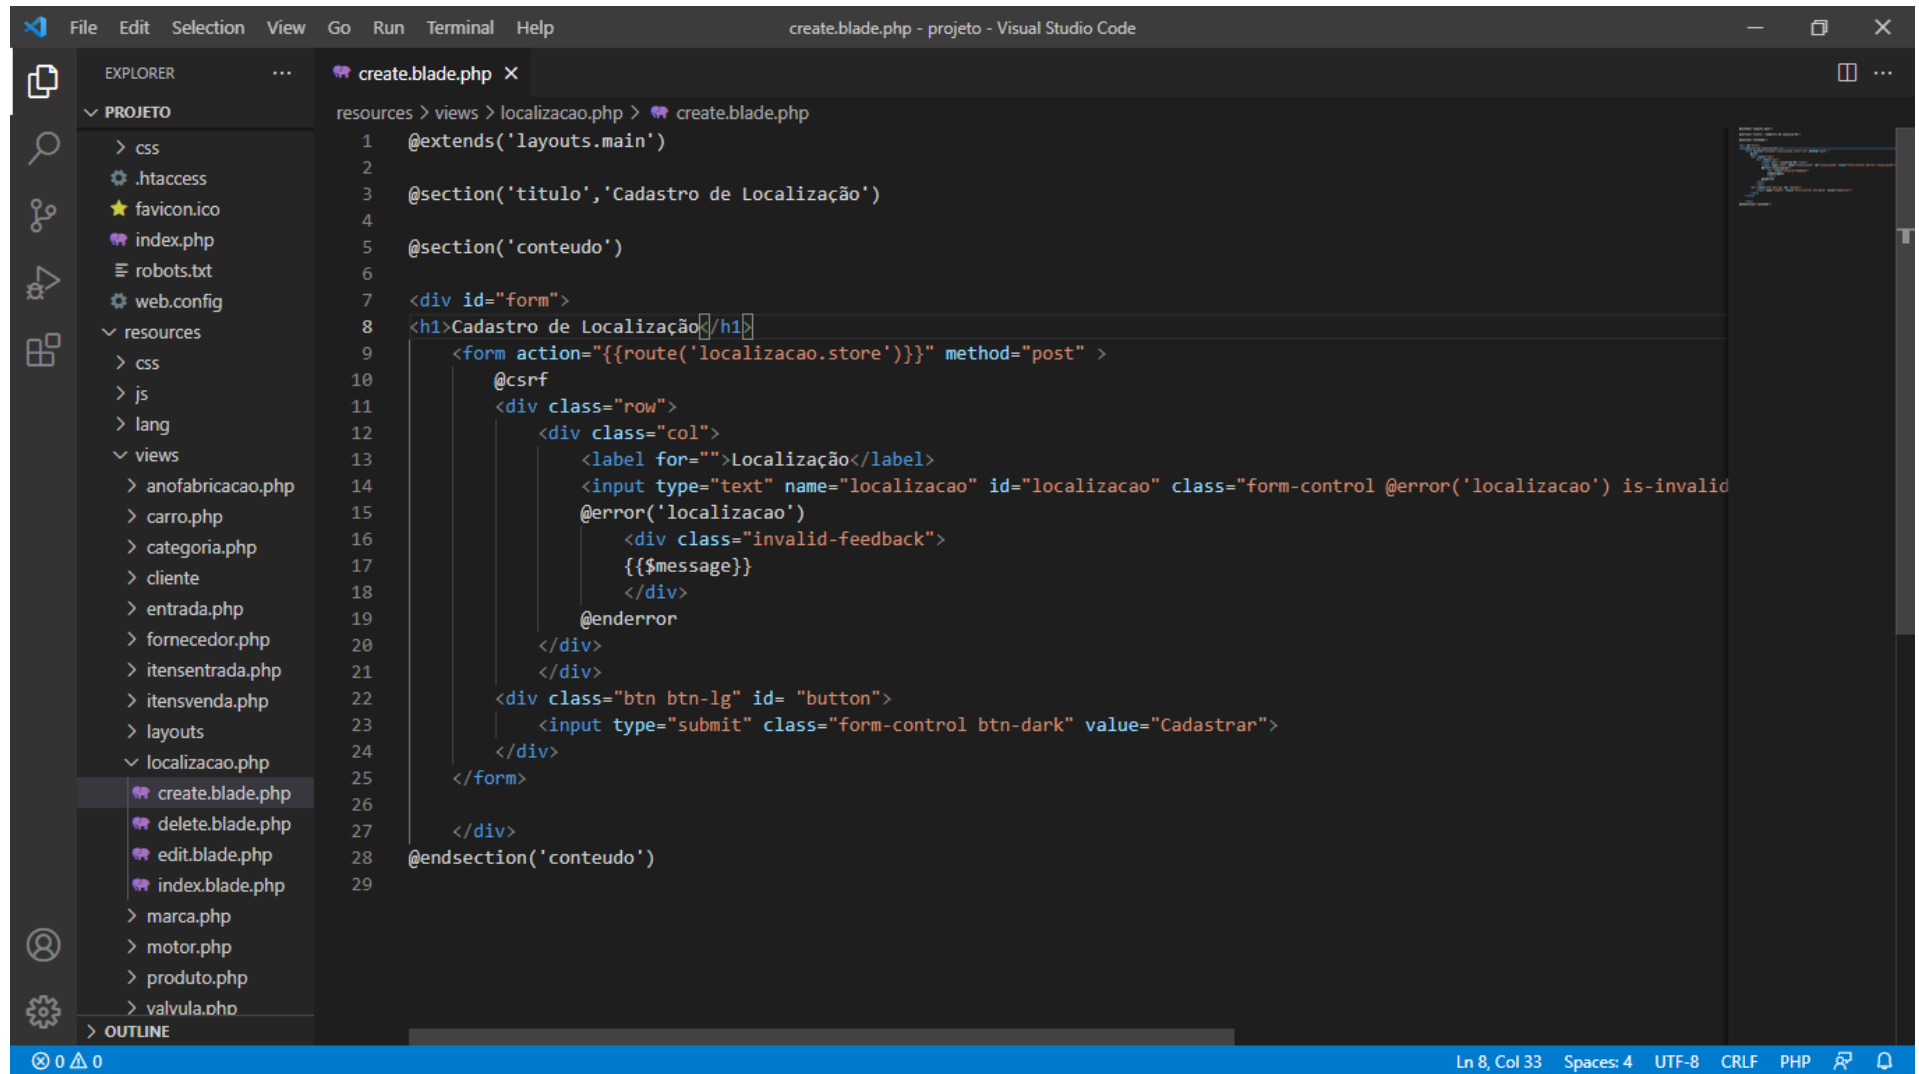

```
1 @extends('layouts.main')
2
3 @section('titulo','Cadastro de Localização')
4
5 @section('conteudo')
6
7 <div id="form">
8 <h1>Cadastro de Localização</h1>
9
10 <form action="{{route('localizacao.store')}}" method="post" >
11     @csrf
12     <div class="row">
13         <div class="col">
14             <label for="">Localização</label>
15             <input type="text" name="localizacao" id="localizacao" class="form-control @error('localizacao') is-invalid">
16             @error('localizacao')
17                 <div class="invalid-feedback">
18                     {{ $message }}
19                 </div>
20             @enderror
21         </div>
22         <div class="btn btn-lg id= "button">
23             <input type="submit" class="form-control btn-dark" value="Cadastrar">
24         </div>
25     </form>
26
27 </div>
28 @endsection('conteudo')
29
```

Ln 8, Col 33 Spaces: 4 UTF-8 CRLF PHP

#Marca

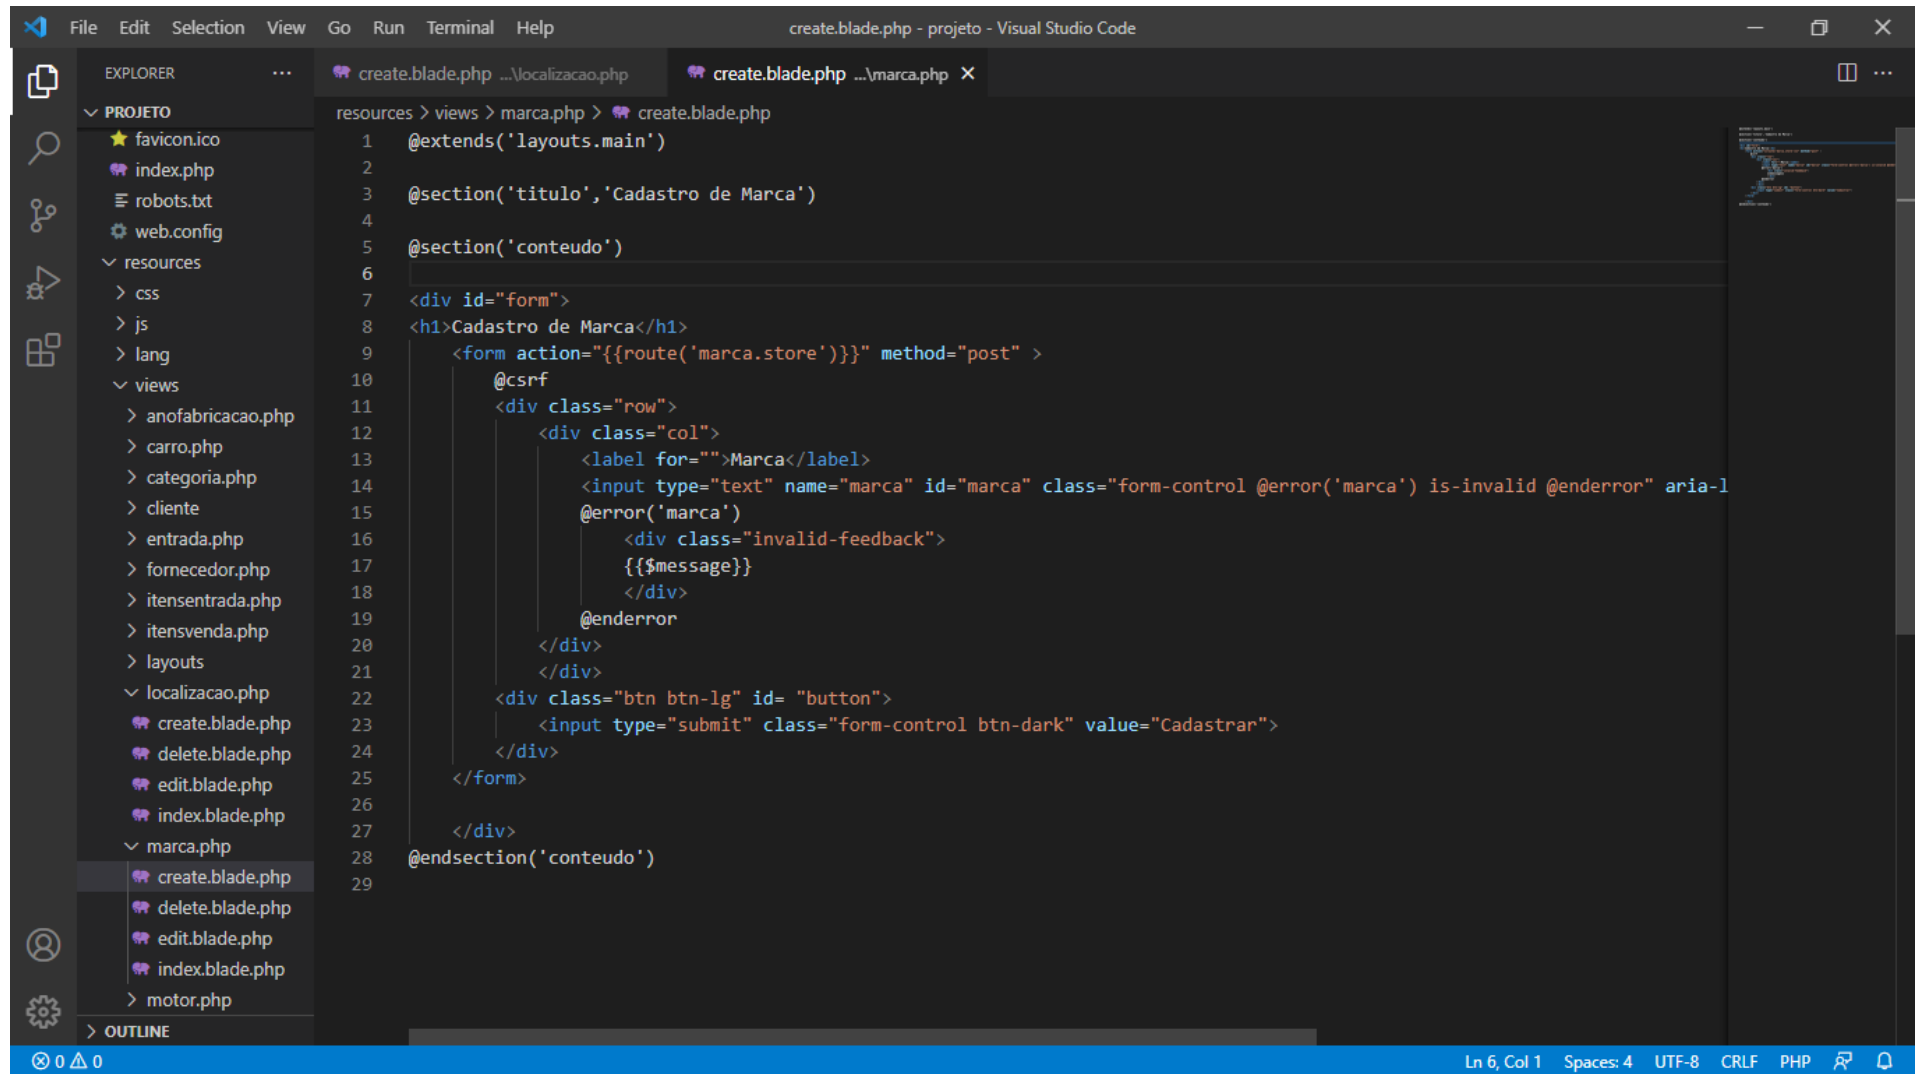


The image shows a Visual Studio Code editor window with the title bar "create.blade.php - projeto - Visual Studio Code". The Explorer sidebar on the left shows a project structure with folders like "resources", "views", and "localizacao.php", and files like "create.blade.php", "delete.blade.php", "edit.blade.php", "index.blade.php", and "motor.php". The main editor area displays the content of "create.blade.php" from the "marca.php" view. The code is a Blade template for a brand registration form, featuring a form with a text input for the brand name, a submit button, and error handling for invalid input.

```
1 @extends('layouts.main')
2
3 @section('titulo','Cadastro de Marca')
4
5 @section('conteudo')
6
7 <div id="form">
8 <h1>Cadastro de Marca</h1>
9 <form action="{{route('marca.store')}}" method="post" >
10     @csrf
11     <div class="row">
12         <div class="col">
13             <label for="">Marca</label>
14             <input type="text" name="marca" id="marca" class="form-control @error('marca') is-invalid @enderror" aria-l
15             @error('marca')
16                 <div class="invalid-feedback">
17                     {{ $message }}
18                 </div>
19             @enderror
20         </div>
21     </div>
22     <div class="btn btn-lg id= "button">
23         <input type="submit" class="form-control btn-dark" value="Cadastrar">
24     </div>
25 </form>
26
27 </div>
28 @endsection('conteudo')
29
```

Ln 6, Col 1 Spaces: 4 UTF-8 CRLF PHP

#Motor

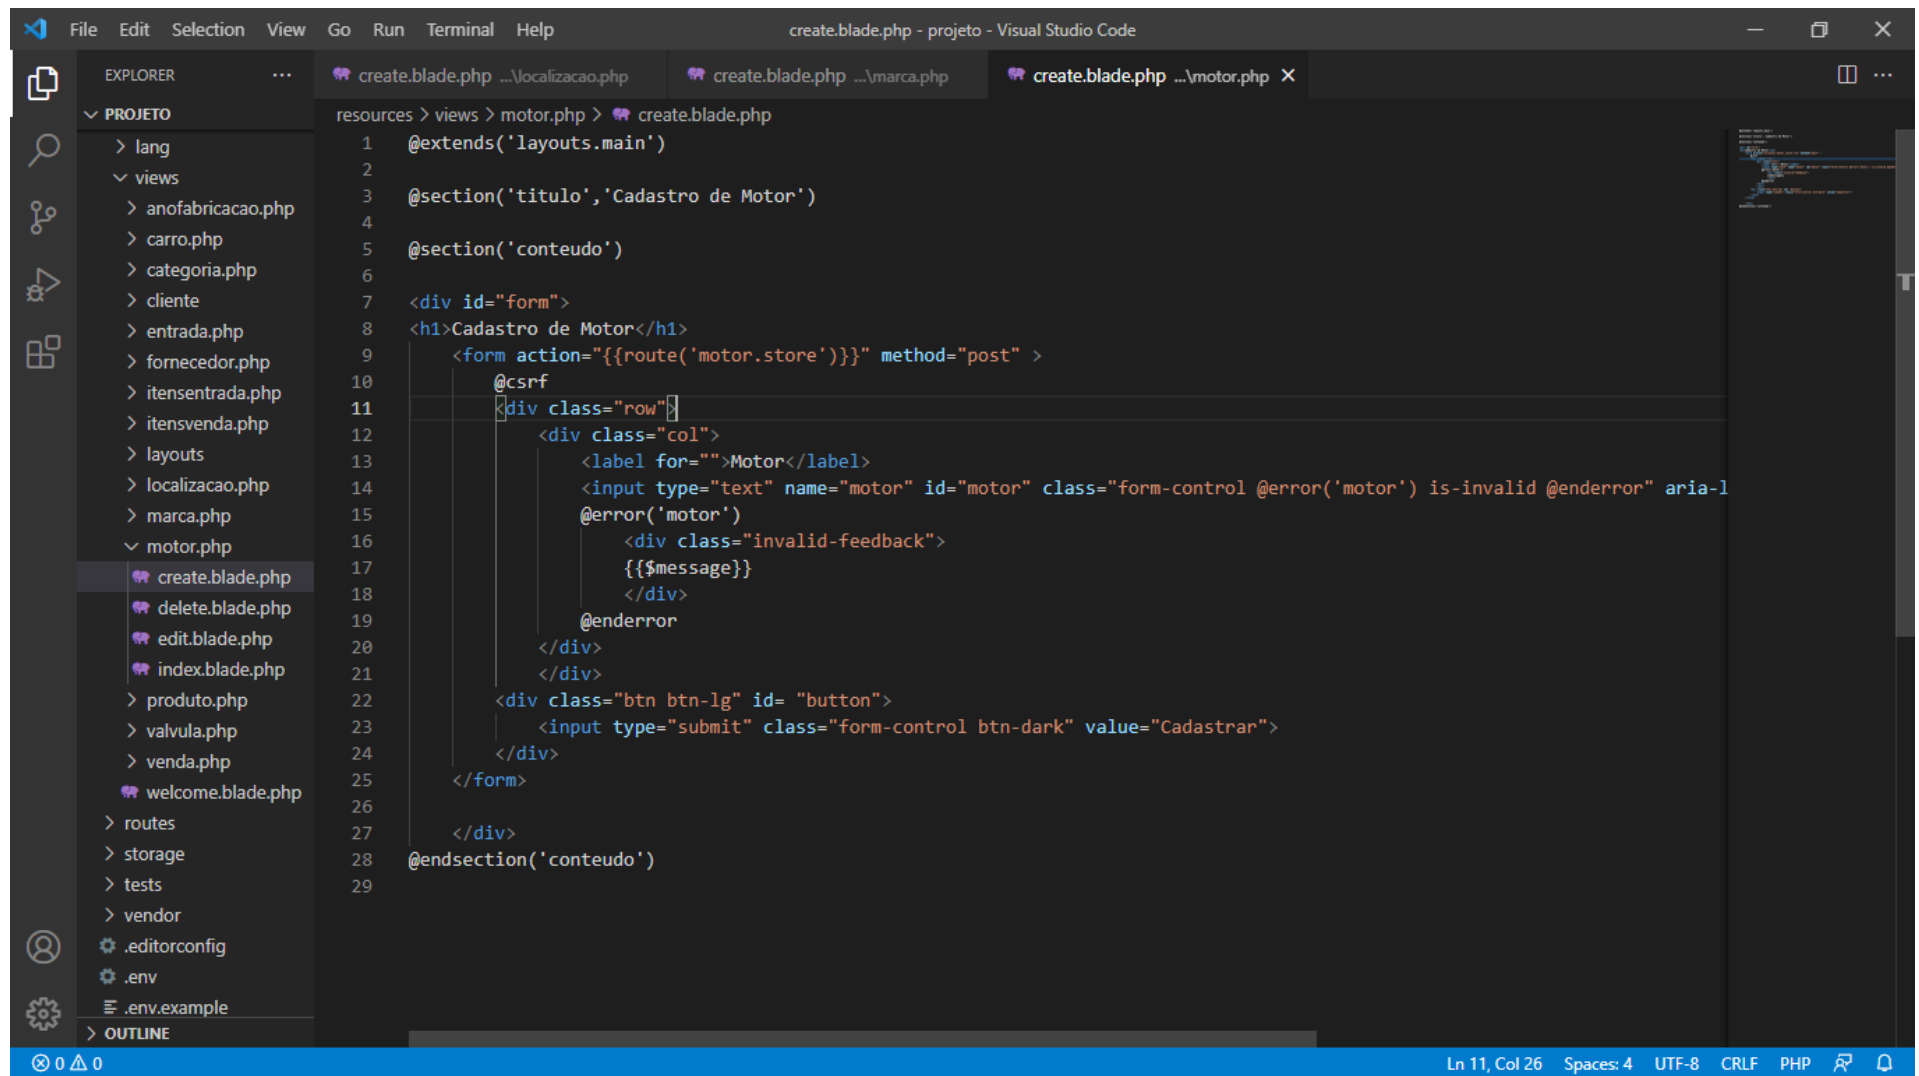


The image shows a Visual Studio Code editor window with the title "create.blade.php - projeto - Visual Studio Code". The Explorer sidebar on the left shows a project structure with folders like "lang", "views", "resources", "routes", "storage", "tests", and "vendor". The "views" folder is expanded, showing files like "anofabricacao.php", "carro.php", "categoria.php", "cliente.php", "entrada.php", "fornecedor.php", "itensentrada.php", "itensvenda.php", "layouts", "localizacao.php", "marca.php", "motor.php", "produto.php", "valvula.php", "venda.php", and "welcome.blade.php". The "motor.php" file is selected, and its content is displayed in the main editor area. The code is a Blade template for a car registration form, featuring a form with a text input for the motor number and a submit button. The form is styled with Bootstrap classes and includes error handling for invalid motor numbers.

```
1 @extends('layouts.main')
2
3 @section('titulo','Cadastro de Motor')
4
5 @section('conteudo')
6
7 <div id="form">
8 <h1>Cadastro de Motor</h1>
9
10 <form action="{{route('motor.store')}}" method="post" >
11     @csrf
12     <div class="row">
13         <div class="col">
14             <label for="">Motor</label>
15             <input type="text" name="motor" id="motor" class="form-control @error('motor') is-invalid @enderror" aria-label="motor" @error('motor')>
16             <div class="invalid-feedback">
17                 {{ $message }}
18             </div>
19         @enderror
20     </div>
21     <div class="btn btn-lg id= "button">
22         <input type="submit" class="form-control btn-dark" value="Cadastrar">
23     </div>
24 </form>
25
26
27 </div>
28 @endsection('conteudo')
29
```

Ln 11, Col 26 Spaces: 4 UTF-8 CRLF PHP

#Valvula

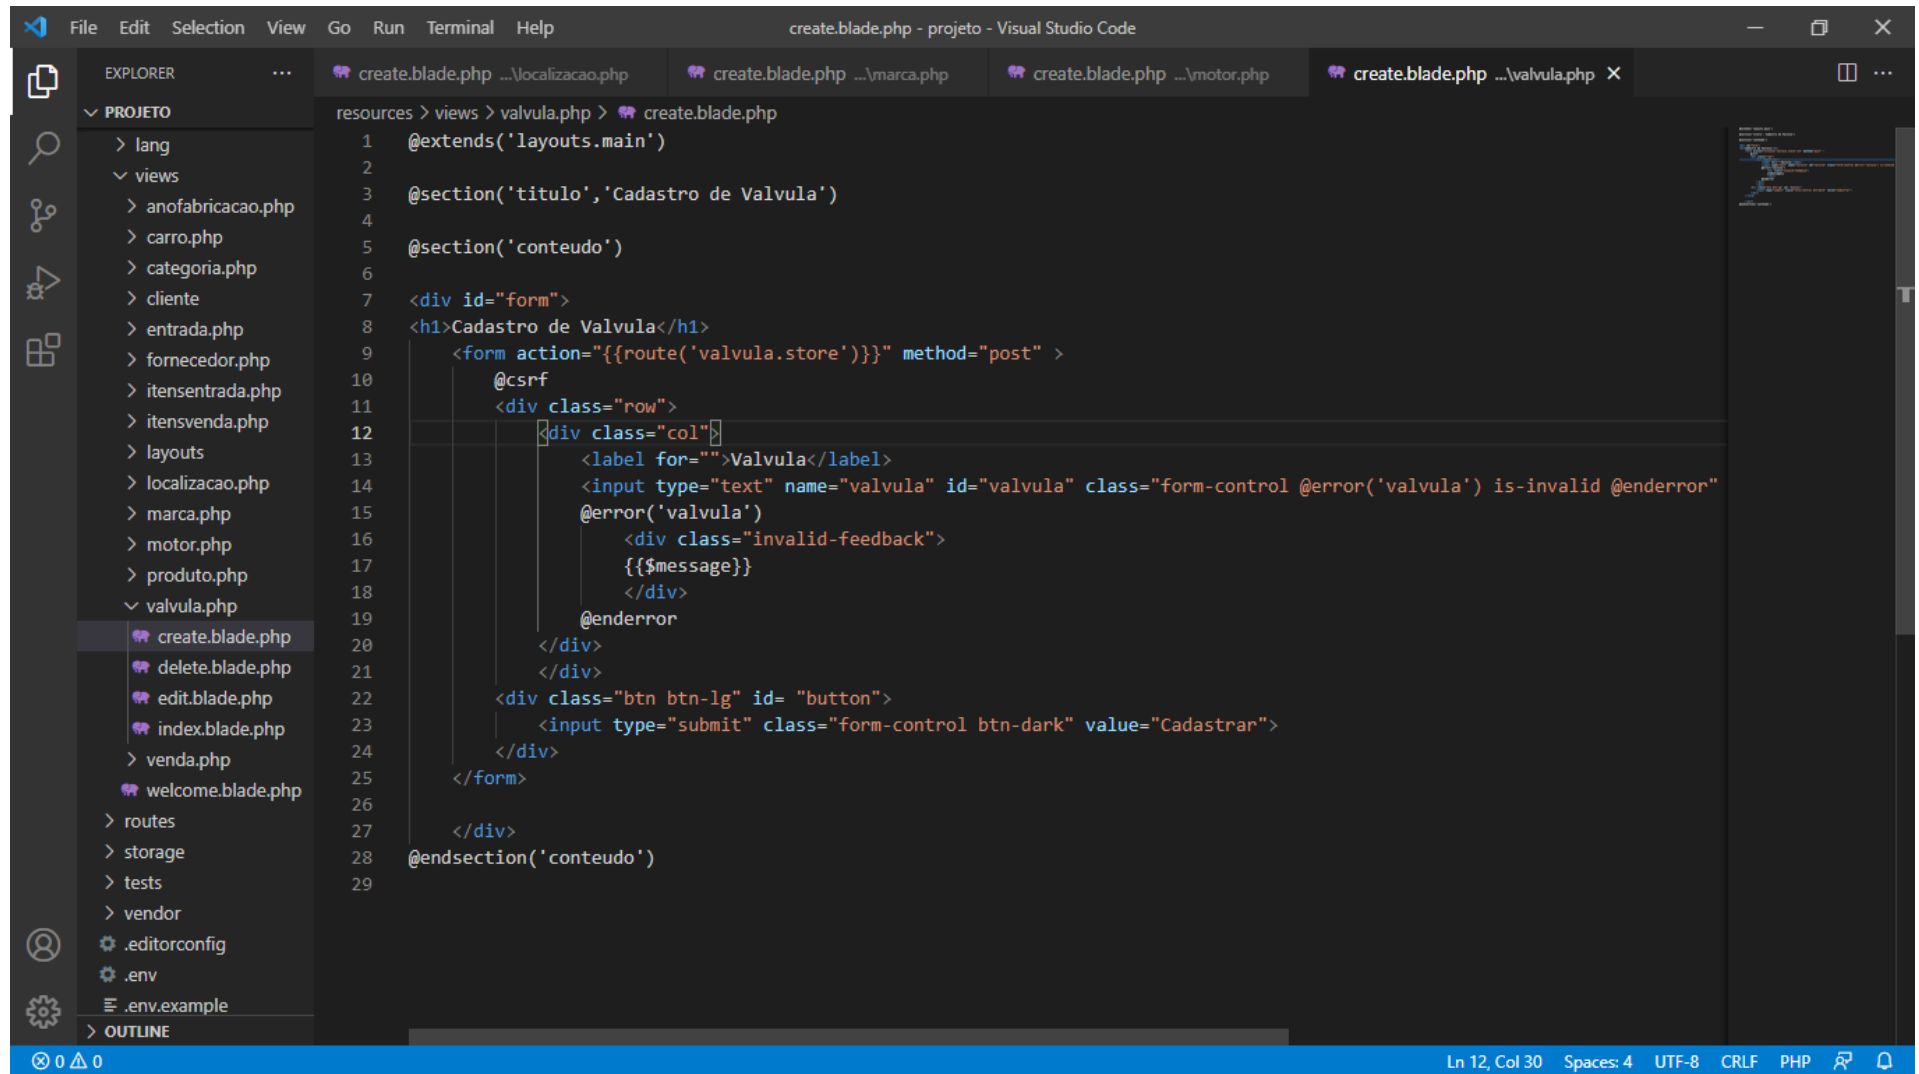

The image shows a Visual Studio Code editor window with the title bar "create.blade.php - projeto - Visual Studio Code". The Explorer sidebar on the left shows a project structure with folders like "lang", "views", "resources", "routes", "storage", "tests", and "vendor". The "views" folder is expanded, showing files like "anofabricacao.php", "carro.php", "categoria.php", "cliente.php", "entrada.php", "fornecedor.php", "itensentrada.php", "itensvenda.php", "layouts", "localizacao.php", "marca.php", "motor.php", "produto.php", "valvula.php", "venda.php", and "welcome.blade.php". The "valvula.php" file is selected and its content is displayed in the main editor area. The code is a Blade template for a "Cadastro de Valvula" form. It includes a form with a text input for "valvula" and a submit button. The form is enclosed in a @csrf directive and a @section('conteudo') directive. The input field has a class "form-control" and a @error('valvula') is-invalid @enderror directive. The submit button has a class "btn btn-lg" and a value "Cadastrar".

```
1 @extends('layouts.main')
2
3 @section('titulo','Cadastro de Valvula')
4
5 @section('conteudo')
6
7 <div id="form">
8 <h1>Cadastro de Valvula</h1>
9 <form action="{{route('valvula.store')}}" method="post" >
10     @csrf
11     <div class="row">
12         <div class="col">
13             <label for="">Valvula</label>
14             <input type="text" name="valvula" id="valvula" class="form-control @error('valvula') is-invalid @enderror"
15                 @error('valvula')
16                 <div class="invalid-feedback">
17                     {{ $message }}
18                 </div>
19             @enderror
20         </div>
21     </div>
22     <div class="btn btn-lg id= "button">
23         <input type="submit" class="form-control btn-dark" value="Cadastrar">
24     </div>
25 </form>
26
27 </div>
28 @endsection('conteudo')
29
```

Ln 12, Col 30 Spaces: 4 UTF-8 CRLF PHP