


1 - Pegar o sistema desenvolvido em WEB I e transformá-lo para Laravel

1.1 - usar layouts utilizados na disciplina(flex-box, grid-layouts) - todas as views = 1ª entrega dia 07/12 = valor 2,00


#Layout

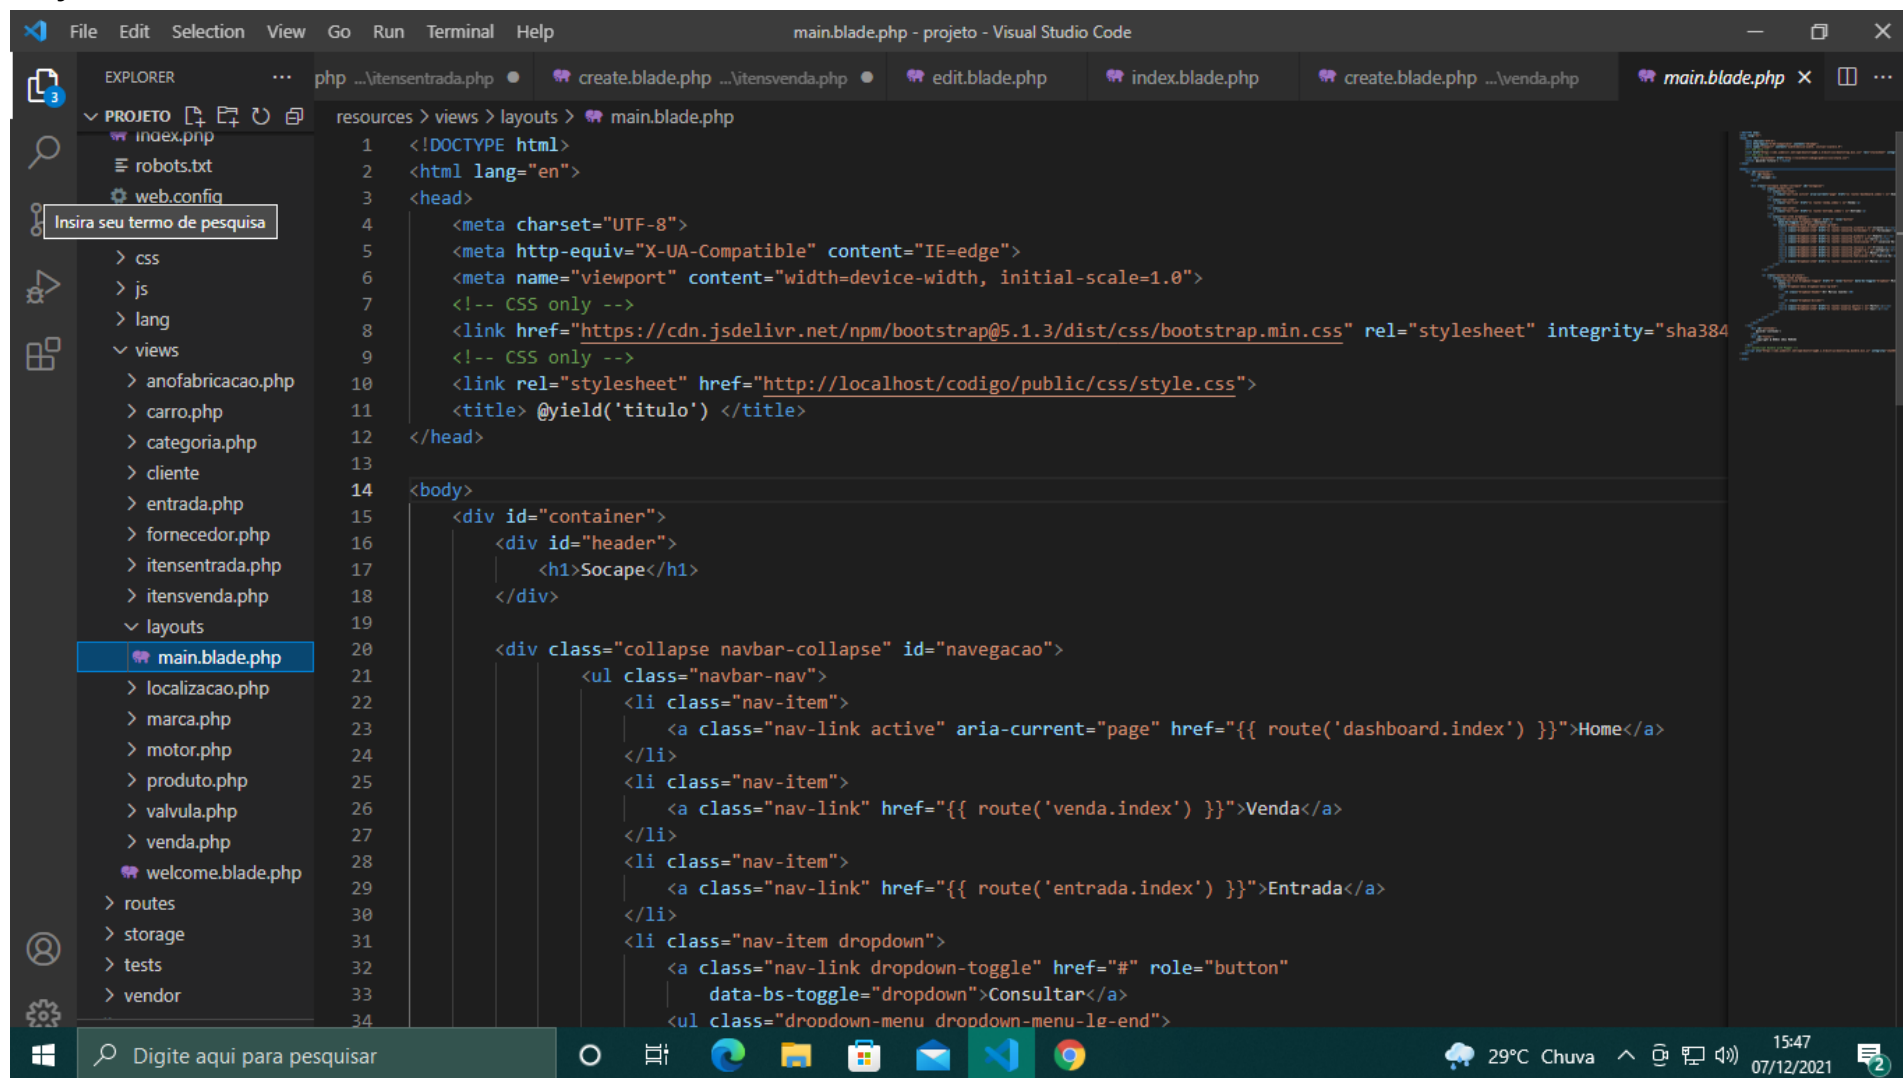


The image shows a screenshot of the Visual Studio Code editor interface. The Explorer panel on the left displays the project structure, including a 'views' directory with a 'layouts' subdirectory. The 'main.blade.php' file is selected and open in the editor. The code is a Blade template for a web application, featuring a navigation bar with links for Home, Venda, Entrada, and Consultar. The layout uses Bootstrap classes for styling and navigation.

```
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <meta charset="UTF-8">
5   <meta http-equiv="X-UA-Compatible" content="IE=edge">
6   <meta name="viewport" content="width=device-width, initial-scale=1.0">
7   <!-- CSS only -->
8   <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/css/bootstrap.min.css" rel="stylesheet" integrity="sha384"
9   <!-- CSS only -->
10  <link rel="stylesheet" href="http://localhost/codigo/public/css/style.css">
11  <title> @yield('titulo') </title>
12 </head>
13
14 <body>
15   <div id="container">
16     <div id="header">
17       <h1>Socape</h1>
18     </div>
19
20     <div class="collapse navbar-collapse" id="navegacao">
21       <ul class="navbar-nav">
22         <li class="nav-item">
23           <a class="nav-link active" aria-current="page" href="{{ route('dashboard.index') }}">Home</a>
24         </li>
25         <li class="nav-item">
26           <a class="nav-link" href="{{ route('venda.index') }}">Venda</a>
27         </li>
28         <li class="nav-item">
29           <a class="nav-link" href="{{ route('entrada.index') }}">Entrada</a>
30         </li>
31         <li class="nav-item dropdown">
32           <a class="nav-link dropdown-toggle" href="#" role="button"
33             data-bs-toggle="dropdown">Consultar</a>
34           <ul class="dropdown-menu dropdown-menu-le-end">
```

#Style

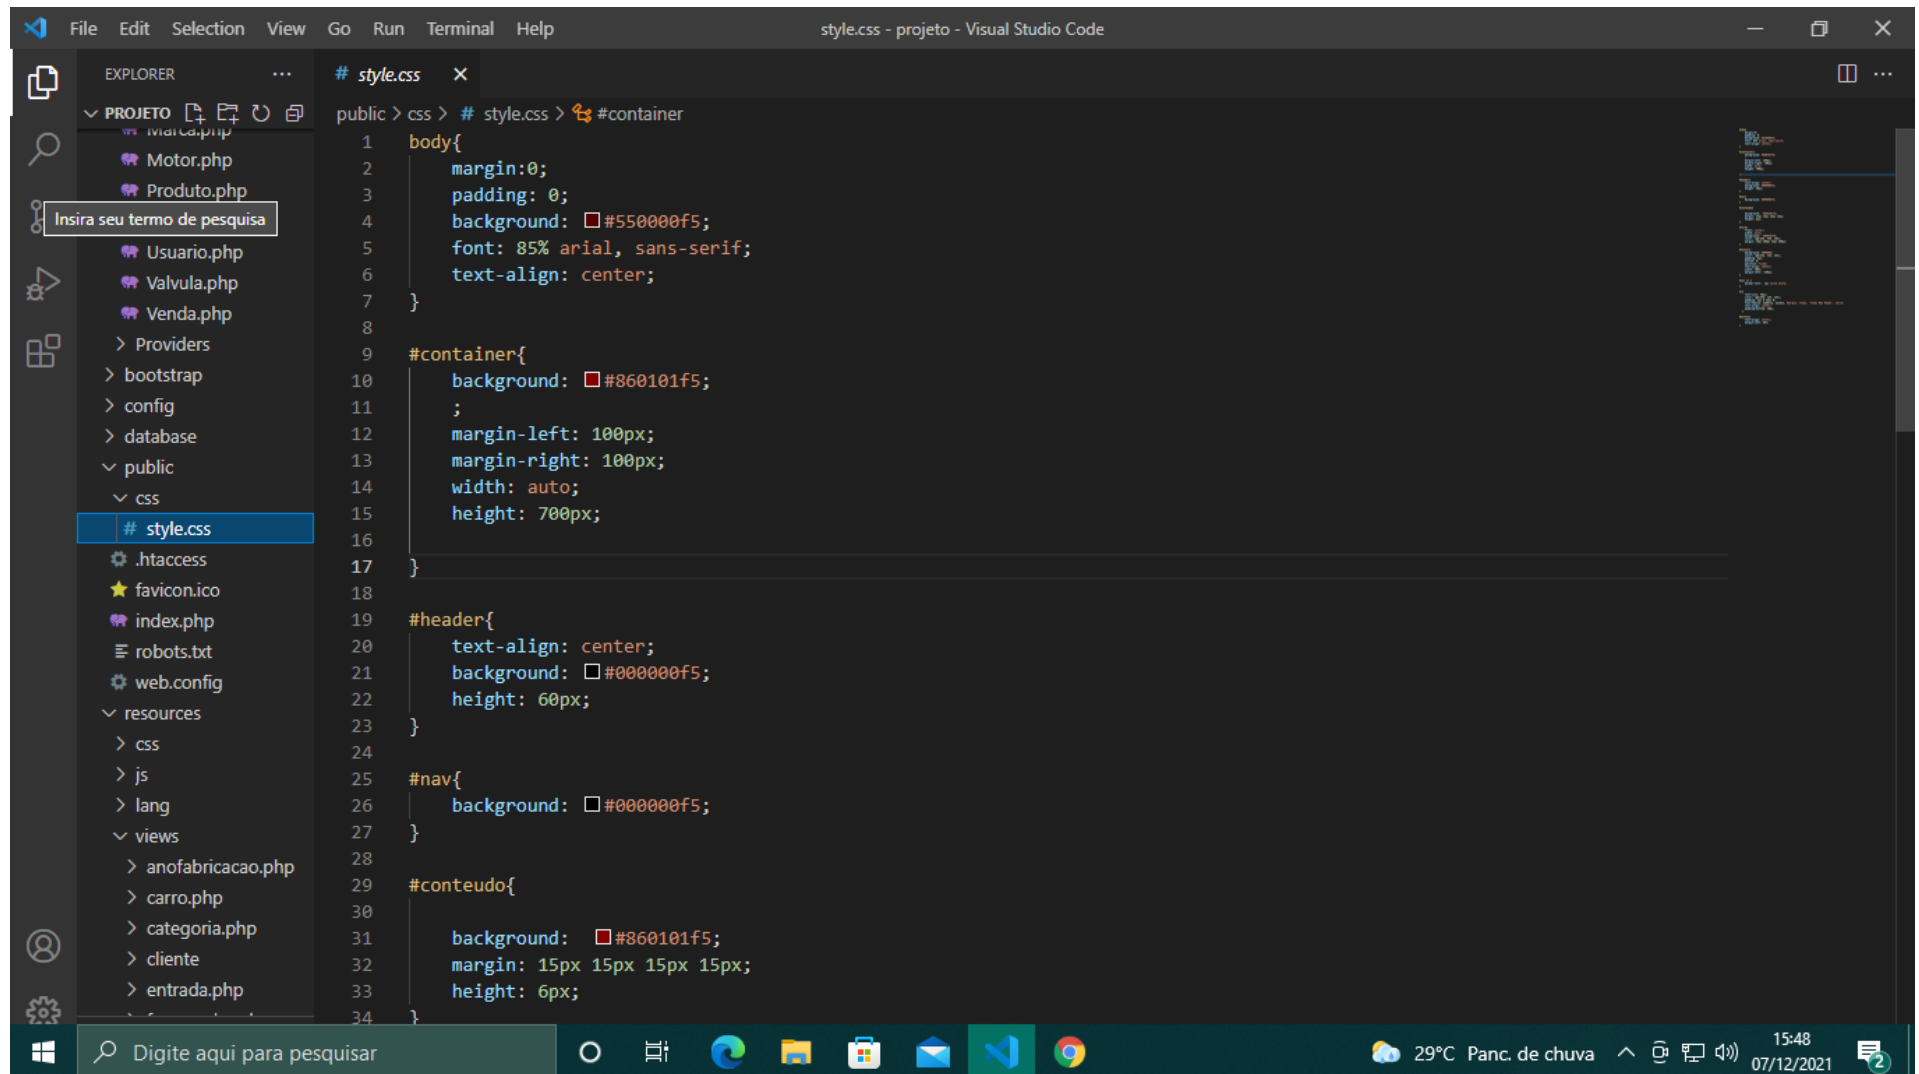

#Fornecedor

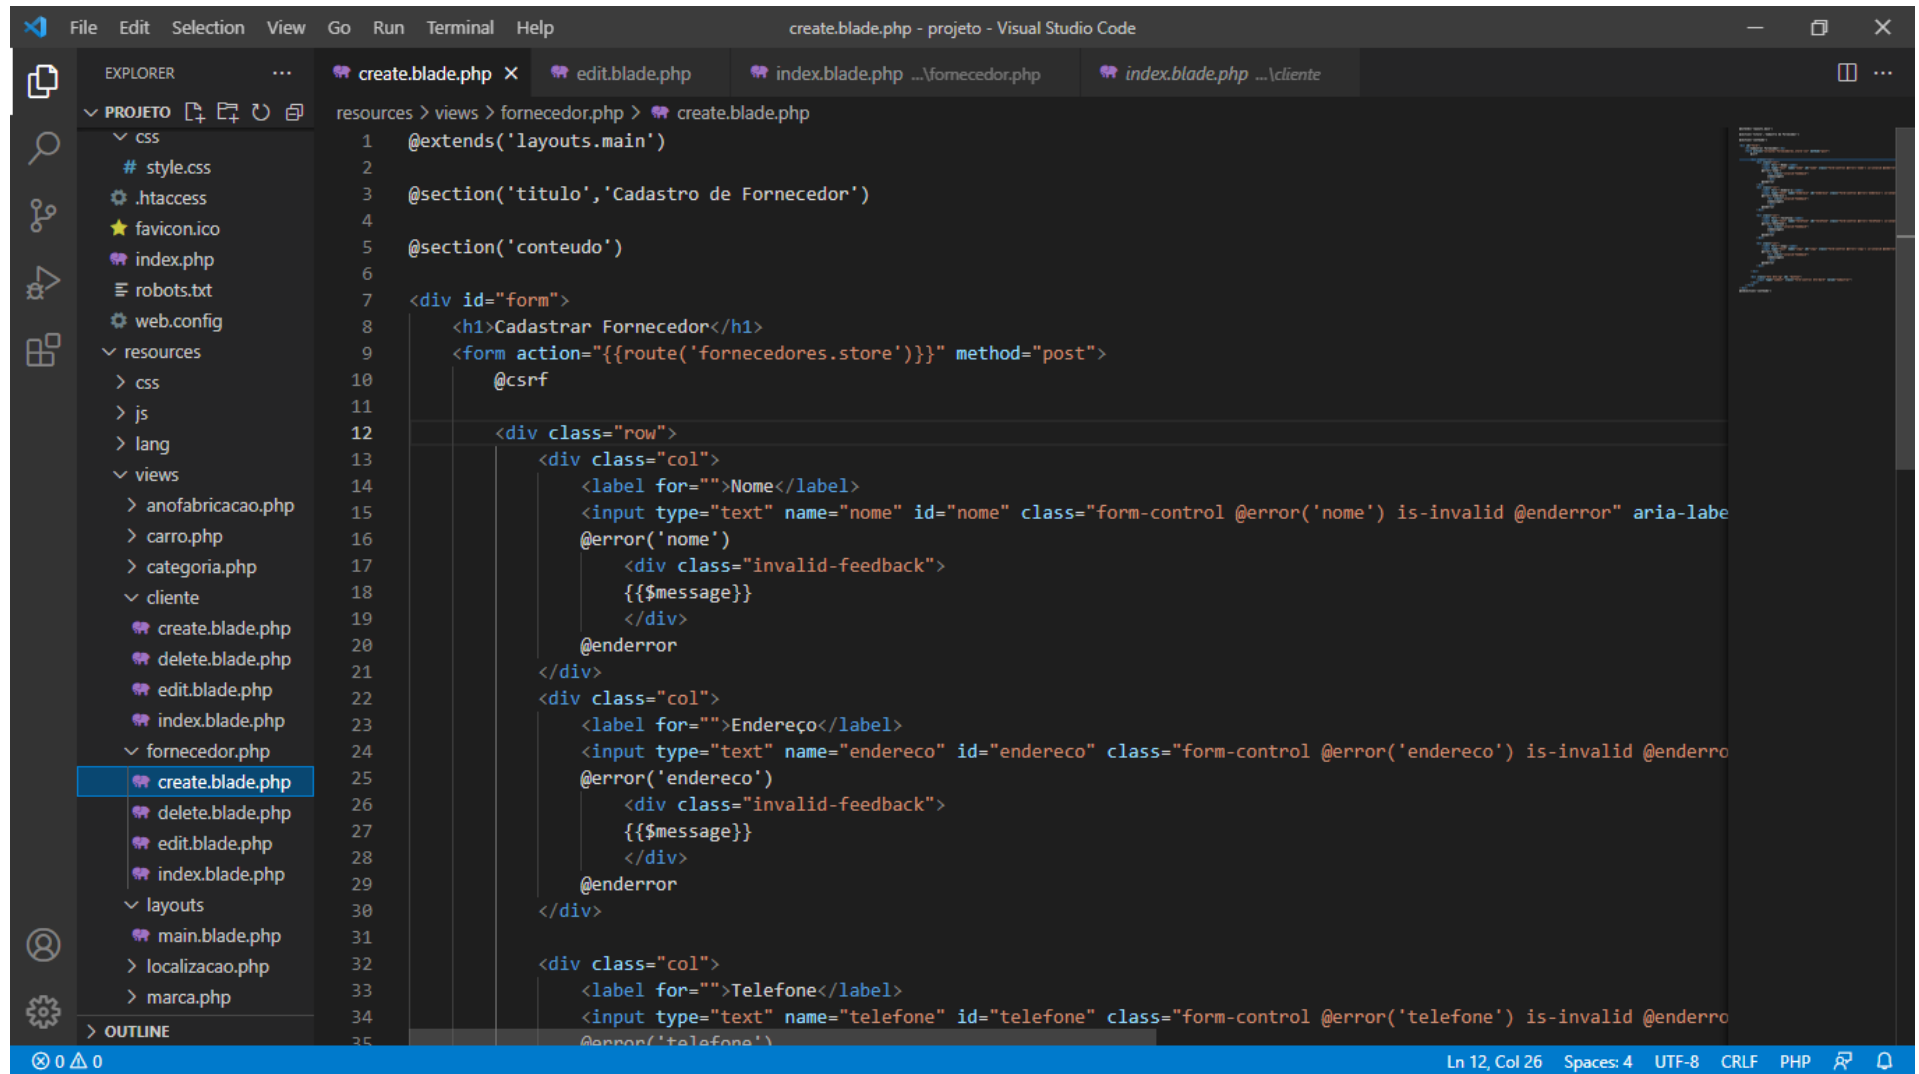


The image shows a Visual Studio Code editor window with the title "create.blade.php - projeto - Visual Studio Code". The Explorer sidebar on the left shows a project structure with folders for "css", "resources", and "views". The "views" folder is expanded, showing a sub-folder "fornecedor.php" which contains the file "create.blade.php" selected. The main editor area displays the content of "create.blade.php" with line numbers 1 through 35. The code is a Blade template for a supplier registration form. It extends the "layouts.main" layout and defines two sections: "titulo" and "conteudo". The "conteudo" section contains a form with a CSRF token and three input fields: "nome", "endereco", and "telefone". Each input field has a label, a form-control class, and an error message container. The form is styled with a grid layout using Bootstrap classes.

```
1 @extends('layouts.main')
2
3 @section('titulo','Cadastro de Fornecedor')
4
5 @section('conteudo')
6
7 <div id="form">
8   <h1>Cadastrar Fornecedor</h1>
9   <form action="{{route('fornecedores.store')}}" method="post">
10     @csrf
11
12     <div class="row">
13       <div class="col">
14         <label for="">Nome</label>
15         <input type="text" name="nome" id="nome" class="form-control @error('nome') is-invalid @enderror" aria-label="Nome">
16         @error('nome')
17           <div class="invalid-feedback">
18             {{$message}}
19           </div>
20         @enderror
21       </div>
22       <div class="col">
23         <label for="">Endereço</label>
24         <input type="text" name="endereco" id="endereco" class="form-control @error('endereco') is-invalid @enderror" aria-label="Endereço">
25         @error('endereco')
26           <div class="invalid-feedback">
27             {{$message}}
28           </div>
29         @enderror
30       </div>
31       <div class="col">
32         <label for="">Telefone</label>
33         <input type="text" name="telefone" id="telefone" class="form-control @error('telefone') is-invalid @enderror" aria-label="Telefone">
34         @error('telefone')
35           <div class="invalid-feedback">
36             {{$message}}
37           </div>
38         @enderror
39       </div>
40     </div>
41   </form>
42 </div>
```

Ln 12, Col 26 Spaces: 4 UTF-8 CRLF PHP

#Cliente

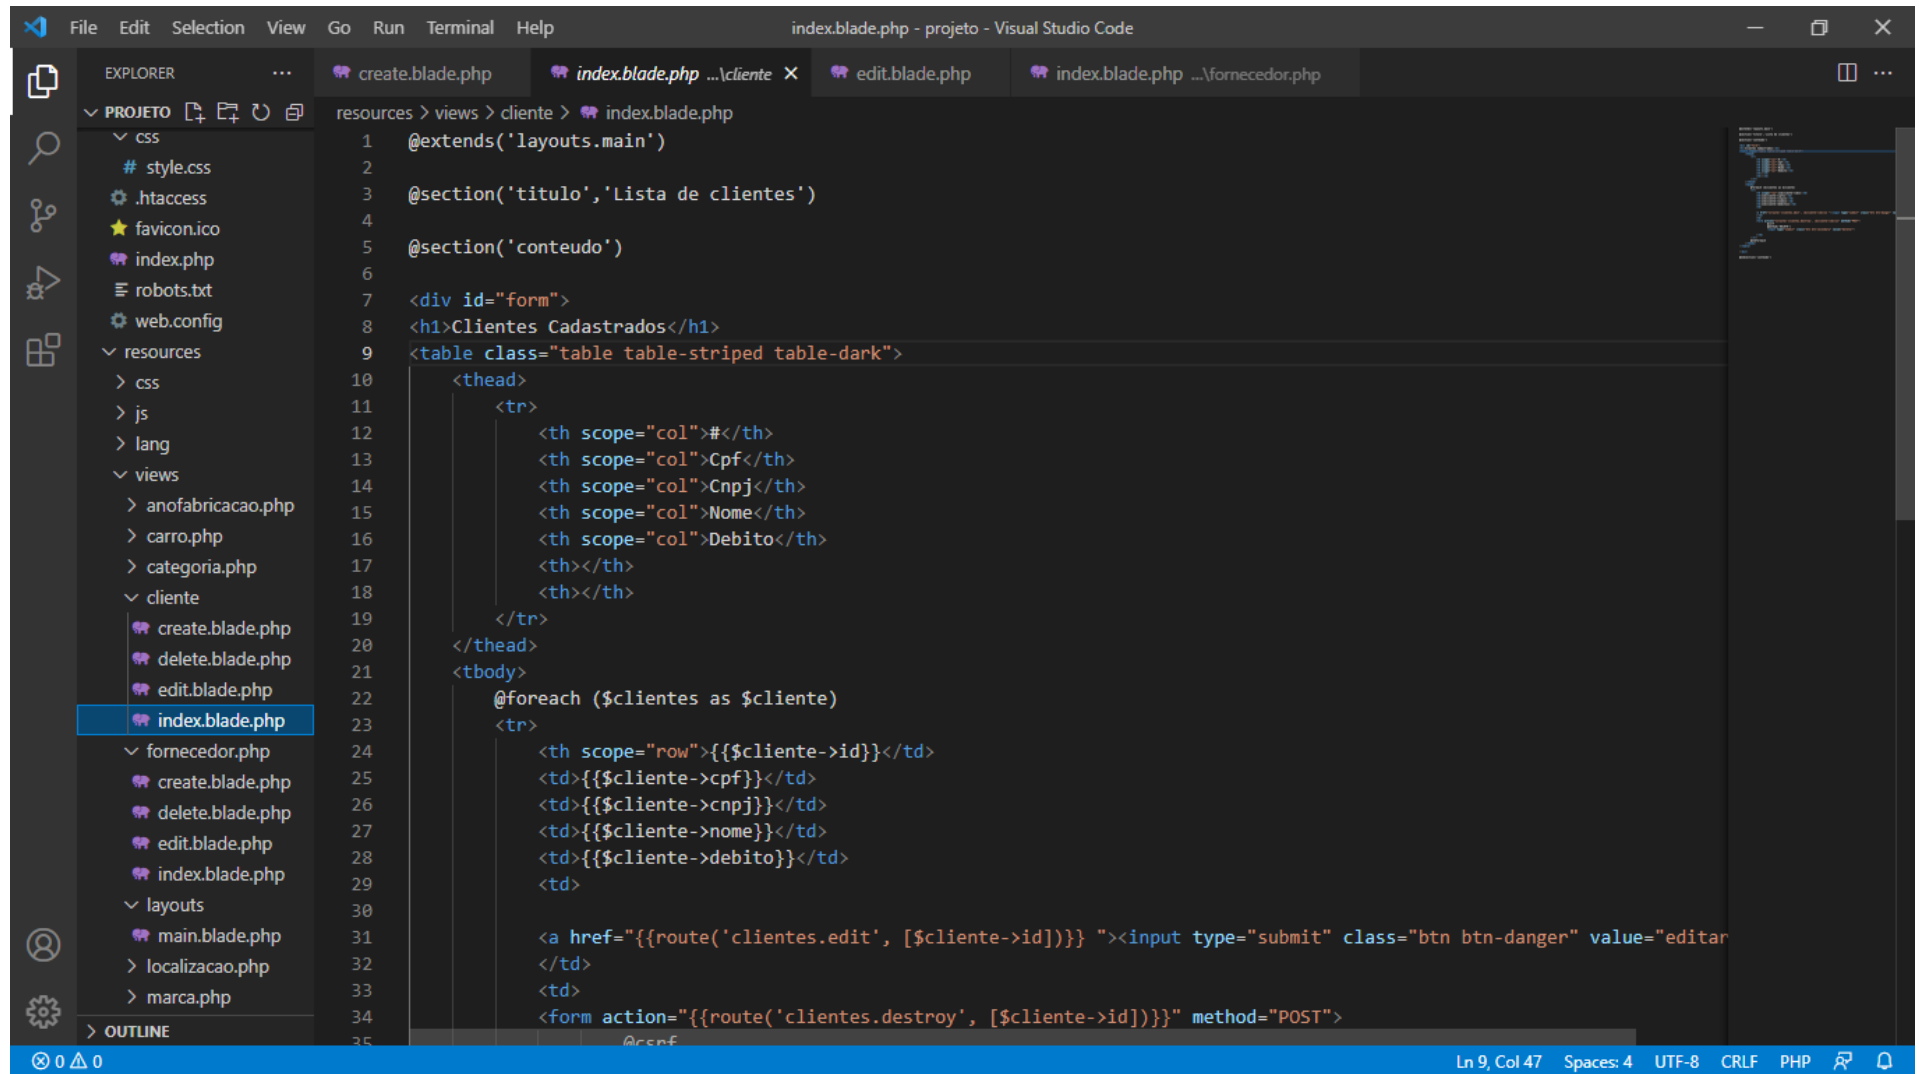

The image shows a Visual Studio Code editor window with the title "index.blade.php - projeto - Visual Studio Code". The Explorer sidebar on the left shows a project structure with folders for "css", "resources", and "views". The "views" folder is expanded, showing a "cliente" subfolder containing "create.blade.php", "delete.blade.php", "edit.blade.php", and "index.blade.php". The "index.blade.php" file is selected and its content is displayed in the main editor area. The code is a Laravel Blade template that extends the "layouts.main" layout. It defines a section titled "Lista de clientes" and a content section. The content section contains a table with the following structure:

```
1 @extends('layouts.main')
2
3 @section('titulo','Lista de clientes')
4
5 @section('conteudo')
6
7 <div id="form">
8 <h1>Clientes Cadastrados</h1>
9 <table class="table table-striped table-dark">
10 <thead>
11 <tr>
12 <th scope="col">#</th>
13 <th scope="col">Cpf</th>
14 <th scope="col">Cnpj</th>
15 <th scope="col">Nome</th>
16 <th scope="col">Debito</th>
17 <th></th>
18 <th></th>
19 </tr>
20 </thead>
21 <tbody>
22 @foreach ($clientes as $cliente)
23 <tr>
24 <th scope="row">{{ $cliente->id }}</th>
25 <td>{{ $cliente->cpf }}</td>
26 <td>{{ $cliente->cnpj }}</td>
27 <td>{{ $cliente->nome }}</td>
28 <td>{{ $cliente->debito }}</td>
29 <td>
30 <a href="{{ route('clientes.edit', [$cliente->id]) }}" "><input type="submit" class="btn btn-danger" value="editar"
31 </td>
32 <td>
33 <form action="{{ route('clientes.destroy', [$cliente->id]) }}" method="POST">
34 @csrf
35
```

The status bar at the bottom indicates the current position is Line 9, Column 47, with 4 spaces, UTF-8 encoding, CRLF line endings, and the PHP language mode.

#Produto

```
File Edit Selection View Go Run Terminal Help
create.blade.php - projeto - Visual Studio Code

EXPLORER
PROJECTO
  resources
  > css
  > js
  > lang
  views
  > anofabricacao.php
  > carro.php
  > categoria.php
  cliente
  create.blade.php
  delete.blade.php
  edit.blade.php
  index.blade.php
  fornecedor.php
  create.blade.php
  delete.blade.php
  edit.blade.php
  index.blade.php
  layouts
  main.blade.php
  > localizacao.php
  > marca.php
  > motor.php
  produto.php
  create.blade.php
  delete.blade.php
  edit.blade.php
  index.blade.php
  > valvula.php
  OUTLINE

resources > views > produto.php > create.blade.php
1 :ends('layouts.main')
2
3 :tion('titulo','Cadastro de produtos')
4
5 :tion('conteudo')
6 <div id="form">
7 <h1>Cadastrar Produto</h1>
8 <form action="{{route('produtos.store')}}" method="post">
9
10 @csrf
11 <div class="row">
12 <div class="col">
13 <label for="idmotor" class="form-label black-text">Motor</label>
14 <select name="idmotor" id="idmotor" class="form-control" required>
15 <option selected disabled value>Selecione</option>
16 <option value="1">0.4</option>
17 </select>
18 @error('idmotor')
19 <div class="invalid-feedback">
20 {{ $message }}
21 </div>
22 @enderror
23 </div>
24 <div class="col">
25 <label for="idcarro" class="form-label black-text">Carro</label>
26 <select id="idcarro" name="idcarro" class="form-control" required>
27 <option selected disabled value>Selecione</option>
28 <option value="1">GOL</option>
29 </select>
30 @error('idcarro')
31 <div class="invalid-feedback">
32 {{ $message }}
33 </div>
34 @enderror
35
```

Ln 8, Col 62 Spaces: 4 UTF-8 CRLF PHP

#Fabricação

The image shows a Visual Studio Code editor window with the title bar "create.blade.php - projeto - Visual Studio Code". The Explorer sidebar on the left shows a project structure with folders for "css" (containing "style.css") and "resources" (containing "css", "js", "lang", and "views"). The "views" folder is expanded, showing a subfolder "anofabricacao.php" which contains several Blade templates: "create.blade.php", "delete.blade.php", "edit.blade.php", "index.blade.php", "carro.php", "categoria.php", "cliente.php", "entrada.php", "fornecedor.php", "itensentrada.php", "itensvenda.php", "layouts", "localizacao.php", "marca.php", "motor.php", and "produto.php". A search bar in the Explorer sidebar contains the text "Insira seu termo de pesquisa".

The main editor area displays the content of "resources > views > anofabricacao.php > create.blade.php". The code is a Laravel Blade template for a registration form. It starts with a line number 1 and ends with 29. The code includes the following elements:

- Line 1: `@extends('layouts.main')`
- Line 2: (empty line)
- Line 3: `@section('titulo', 'Fabricação')`
- Line 4: (empty line)
- Line 5: `@section('conteudo')`
- Line 6: (empty line)
- Line 7: `<div id="form">`
- Line 8: `<h1>Cadastro de Fabricação</h1>`
- Line 9: `<form action="{{route('anofabricacao.store')}}" method="post" >`
- Line 10: `@csrf`
- Line 11: `<div class="row">`
- Line 12: `<div class="col">`
- Line 13: `<label for="">Ano</label>`
- Line 14: `<input type="text" name="anofabricacao" id="anofabricacao" class="form-control @error('anofabricacao') is-i`
- Line 15: `@error('anofabricacao')`
- Line 16: `<div class="invalid-feedback">`
- Line 17: `{{$message}}`
- Line 18: `</div>`
- Line 19: `@enderror`
- Line 20: `</div>`
- Line 21: `</div>`
- Line 22: `<div class="btn btn-lg" id="button">`
- Line 23: `<input type="submit" class="form-control btn-dark" value="Cadastrar">`
- Line 24: `</div>`
- Line 25: `</form>`
- Line 26: (empty line)
- Line 27: `</div>`
- Line 28: `@endsection('conteudo')`
- Line 29: (empty line)

The Windows taskbar at the bottom shows the system clock as 15:29 on 07/12/2021, with weather information indicating 29°C and "Chuva" (Rain). Several application icons are visible in the taskbar, including the Start button, search, and various utility and browser icons.

#Carro

The image shows a Visual Studio Code editor window with the title bar "create.blade.php - projeto - Visual Studio Code". The Explorer sidebar on the left shows a project structure with folders like "css", "resources", and "views". The "views" folder is expanded, showing a "carro.php" file which is selected. The main editor area displays the content of "create.blade.php" with the following code:

```
1 @extends('layouts.main')
2
3 @section('titulo','Cadastro de Carros')
4
5 @section('conteudo')
6
7 <div id="form">
8 <h1>Cadastro de Carros</h1>
9
10 <form action="{{route('carro.store')}}" method="post" >
11     @csrf
12     <div class="row">
13         <div class="col">
14             <label for="">Modelo</label>
15             <input type="text" name="modelo" id="modelo" class="form-control @error('modelo') is-invalid @enderror"
16                 @error('modelo')
17                 <div class="invalid-feedback">
18                     {{ $message }}
19                 </div>
20             @enderror
21         </div>
22         <div class="btn btn-lg id= "button">
23             <input type="submit" class="form-control btn-dark" value="Cadastrar">
24         </div>
25     </form>
26
27 </div>
28 @endsection('conteudo')
29
```

The status bar at the bottom shows the Windows taskbar with various icons, a search bar, and system information: "29°C Chuva", "15:37", and "07/12/2021".

#Entrada

```


1  @extends('layouts.main')
2
3  @section('title', 'Entrada')
4
5  @section('conteudo')
6
7      <span class="display-6">Entradas</span>
8
9
10     <section class="d-flex justify-content-center">
11         <form id="realizarEntrada" method="GET" action="{{ route('entrada.itensentrada') }}">
12             <div class="row align-items-end mb-3 d-flex">
13                 <div class="col">
14                     <label for="barraPesquisa" class="form-label black-text">FORNECEDOR</label>
15                     <input type="text" placeholder="FORNECEDOR" class="form-control" id="barraPesquisa" aria-describedby="f
16                     <input id="idfornecedor" name="idfornecedor" type="hidden" required>
17                     <div id="fornecedorHelp" class="form-text">Digite o nome do fornecedor e selecione-o na lista.</div>
18                 </div>
19                 <div class="col">
20                     <button type="submit" class="btn btn-dark">DAR ENTRADA</button>
21                 </div>
22             </div>
23         </form>
24     </section>
25
26     <section class="container-fluid text-start mb-5">
27         <div class="table-responsive-lg">
28             <table class="table table-hover">
29                 <thead>
30                     <tr>
31                         <th scope="col">#</th>
32                         <th scope="col">FORNECEDOR</th>
33                         <th scope="col">DATA</th>
34                         <th scope="col">STATUS</th>
35                         <th scope="col">ITEMS</th>

```


#ItensEntrada

```
1 @extends('layouts.main')
2
3 @section('title', 'Itens entrada')
4
5 @section('conteudo')
6
7     <span class="display-6">ITENS - ENTRADA</span>
8
9
10     <div class="row">
11         <p class="display-6 ms-auto">INFORMAÇÕES DO FORNECEDOR</p>
12     </div>
13
14     <div class="row">
15         <div class="col">
16             <label for="nomeFornecedor" class="form-label black-text">NOME</label>
17             <input type="text" id="nomeFornecedor" class="form-control" value="{{ $fornecedor->nome }}" disabled>
18         </div>
19         <div class="col">
20             <label for="enderecoFornecedor" class="form-label black-text">ENDEREÇO</label>
21             <input type="text" id="enderecoFornecedor" class="form-control" value="{{ $fornecedor->endereco }}" disabled>
22         </div>
23         <div class="col">
24             <label for="telefoneFornecedor" class="form-label black-text">TELEFONE</label>
25             <input type="text" id="telefoneFornecedor" class="form-control" value="{{ $fornecedor->telefone }}" disabled>
26         </div>
27         <div class="col">
28             <label for="cnpjFornecedor" class="form-label black-text">CNPJ</label>
29             <input type="text" id="cnpjFornecedor" class="form-control" value="{{ $fornecedor->cnpj }}" disabled>
30         </div>
31     </div>
32 </section>
33 <section class="text-start mb-3">
34     <div class="row">
35         <p class="display-6 ms-auto">INSTR. ITENS</p>
```

#Venda

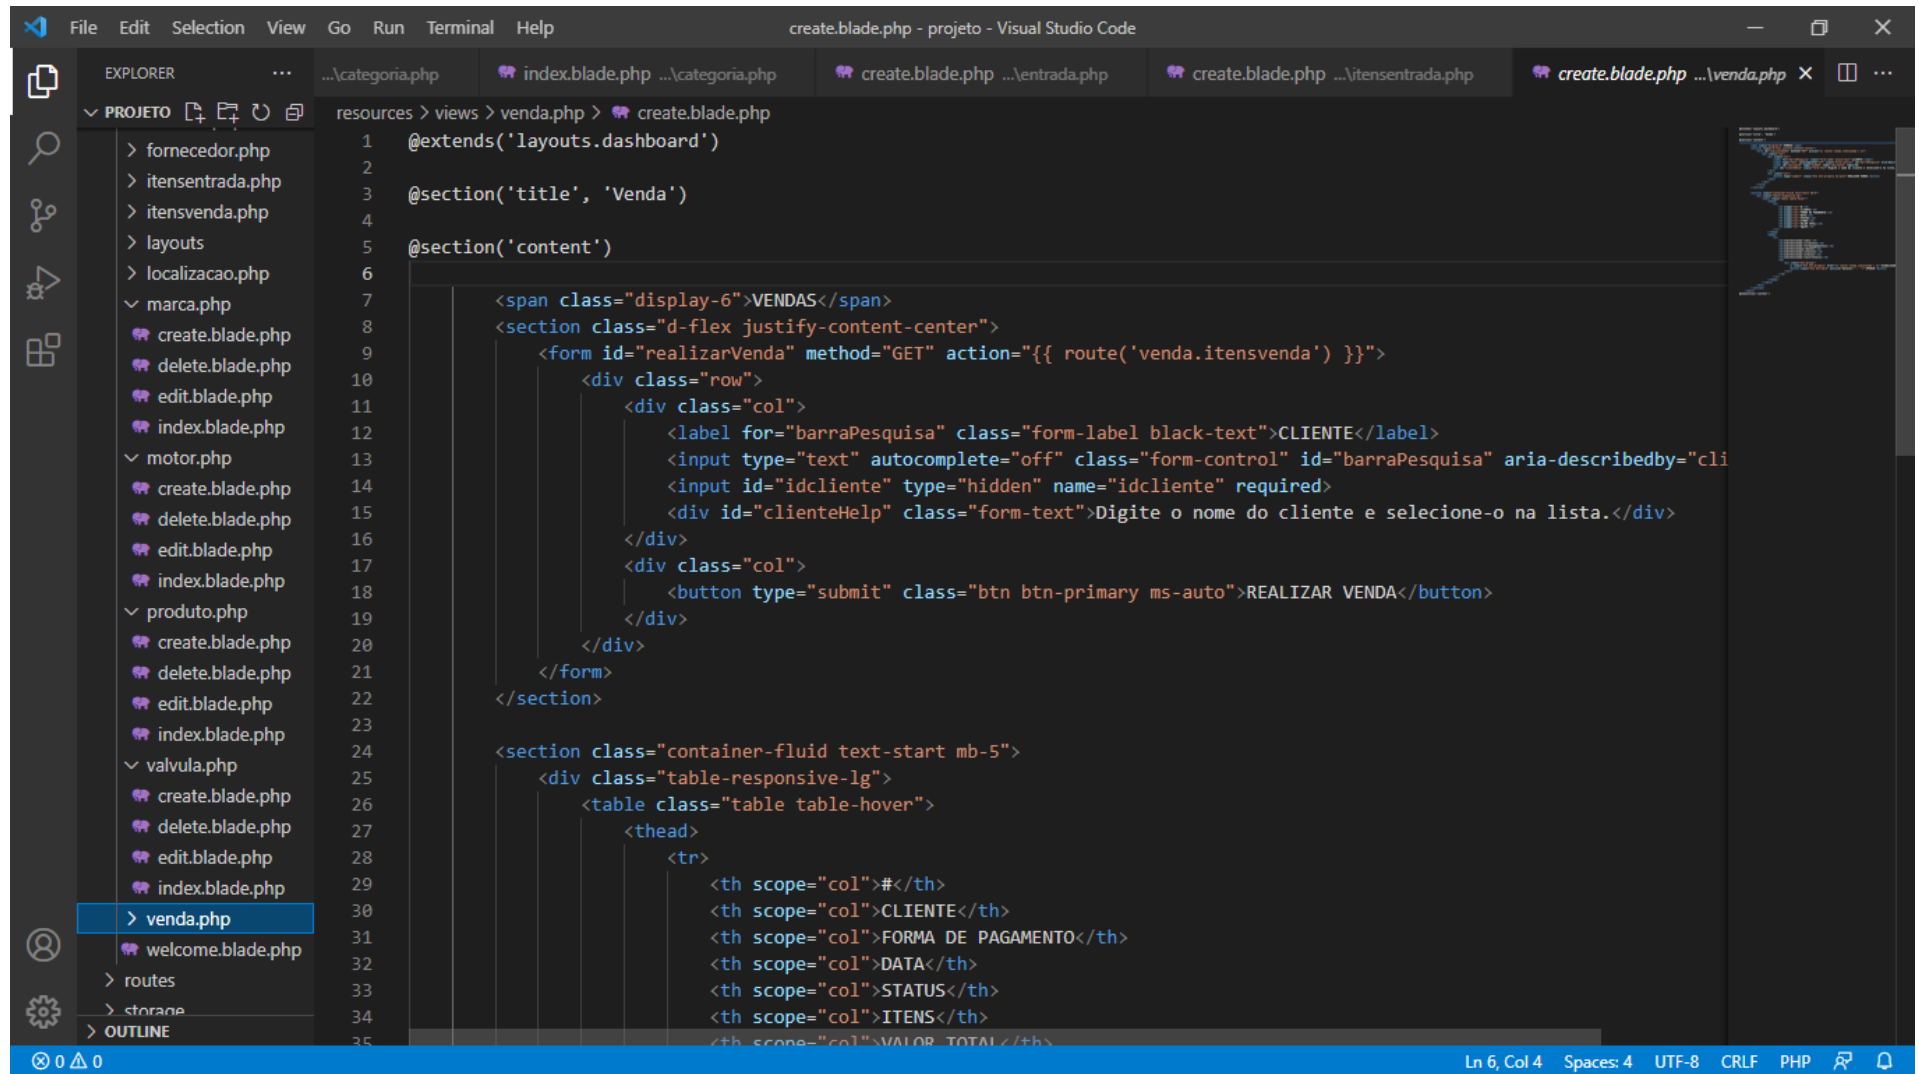


The image shows a Visual Studio Code editor window with a project named "projeto". The Explorer sidebar on the left shows a file tree with folders for "resources" and "views", and a "venda.php" file selected. The main editor area displays the content of "venda.php", which is a Blade template. The template extends the "layouts.dashboard" layout and defines sections for "title" and "content". The "content" section contains a form for making a sale, including a search bar for clients, a submit button, and a table for displaying sale details. The table has columns for client name, payment form, data, status, item, and total value.

```
1 @extends('layouts.dashboard')
2
3 @section('title', 'Venda')
4
5 @section('content')
6
7     <span class="display-6">VENDAS</span>
8     <section class="d-flex justify-content-center">
9         <form id="realizarVenda" method="GET" action="{{ route('venda.itensvenda') }}">
10             <div class="row">
11                 <div class="col">
12                     <label for="barraPesquisa" class="form-label black-text">CLIENTE</label>
13                     <input type="text" autocomplete="off" class="form-control" id="barraPesquisa" aria-describedby="cli
14                     <input id="idcliente" type="hidden" name="idcliente" required>
15                     <div id="clienteHelp" class="form-text">Digite o nome do cliente e selecione-o na lista.</div>
16                 </div>
17                 <div class="col">
18                     <button type="submit" class="btn btn-primary ms-auto">REALIZAR VENDA</button>
19                 </div>
20             </div>
21         </form>
22     </section>
23
24     <section class="container-fluid text-start mb-5">
25         <div class="table-responsive-lg">
26             <table class="table table-hover">
27                 <thead>
28                     <tr>
29                         <th scope="col">#</th>
30                         <th scope="col">CLIENTE</th>
31                         <th scope="col">FORMA DE PAGAMENTO</th>
32                         <th scope="col">DATA</th>
33                         <th scope="col">STATUS</th>
34                         <th scope="col">ITENS</th>
35                         <th scope="col">VALOR TOTAL</th>
36                     </tr>
37                 </thead>
38             </table>
39         </div>
40     </section>
41 </section>
```


Ln 6, Col 4 Spaces: 4 UTF-8 CRLF PHP

#ItensVenda

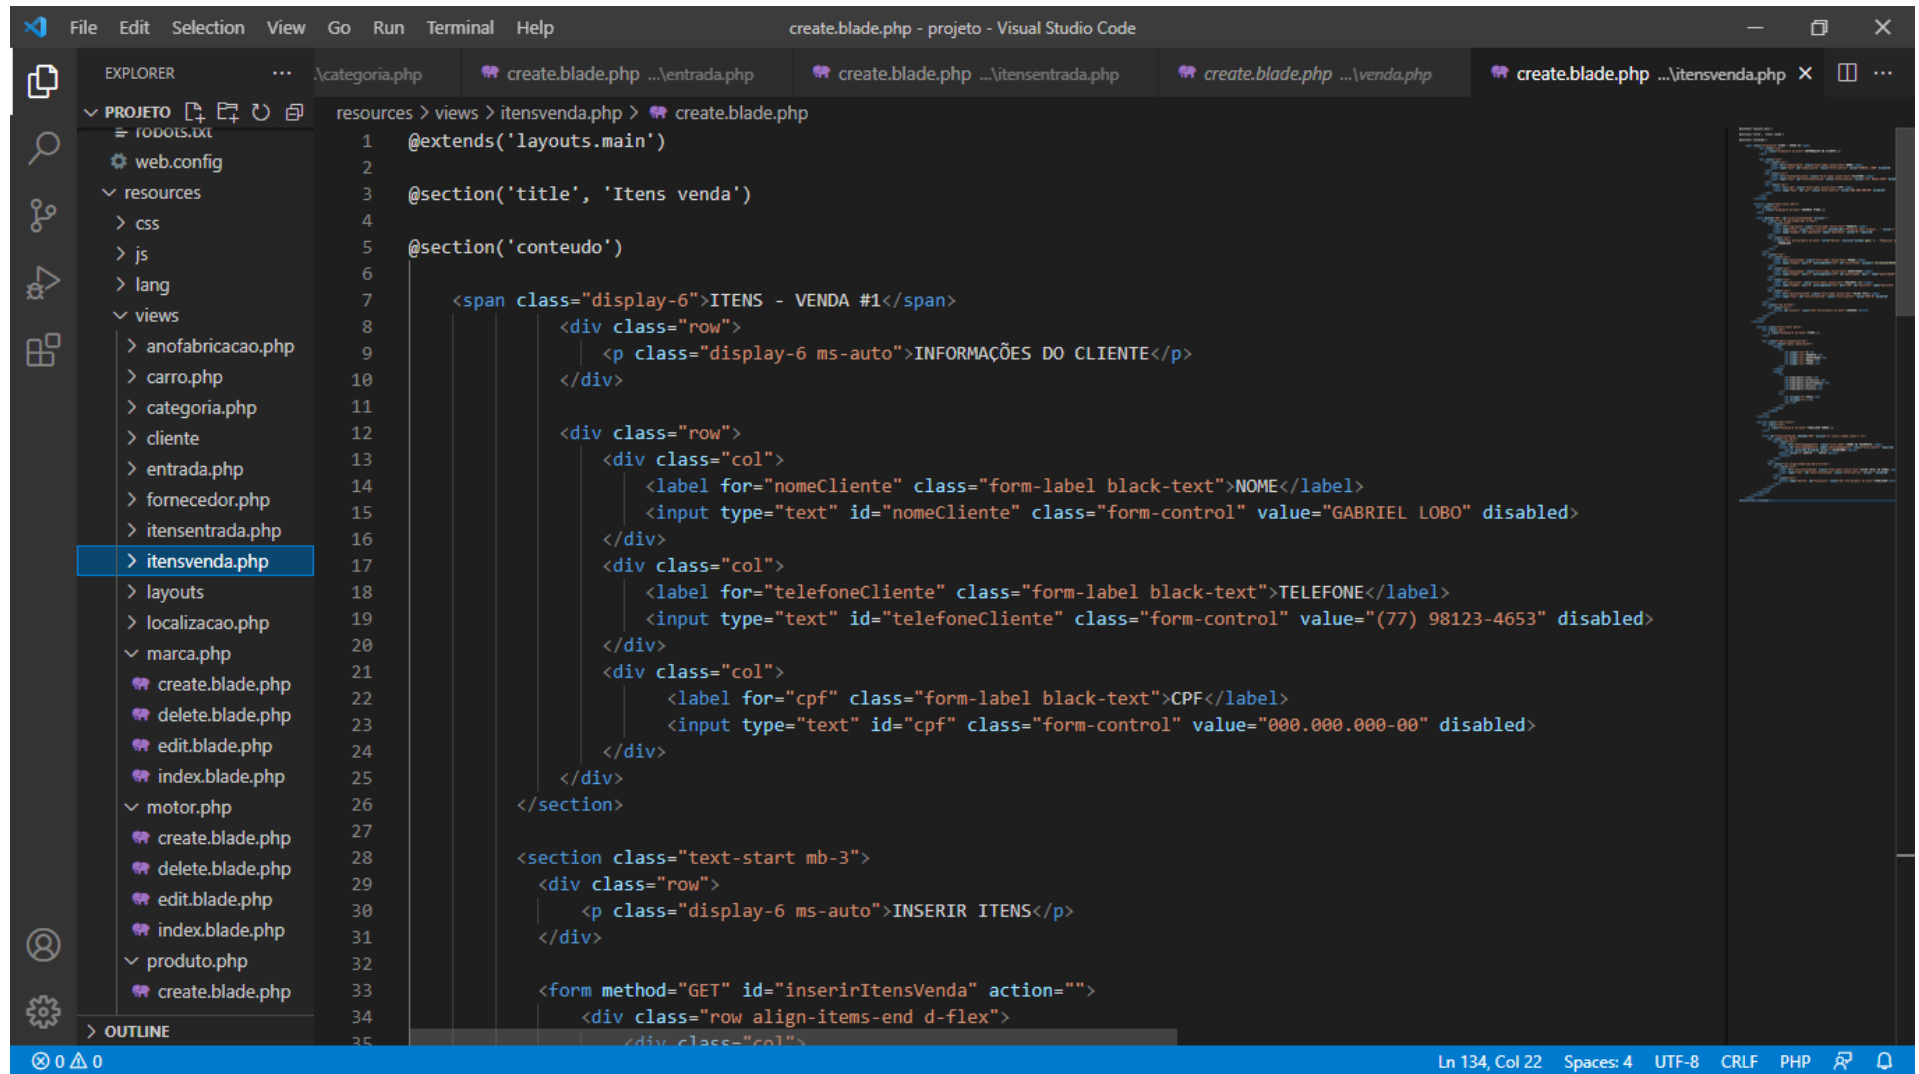

```
1 @extends('layouts.main')
2
3 @section('title', 'Itens venda')
4
5 @section('conteudo')
6
7     <span class="display-6">ITENS - VENDA #1</span>
8
9     <div class="row">
10         <p class="display-6 ms-auto">INFORMAÇÕES DO CLIENTE</p>
11     </div>
12
13     <div class="row">
14         <div class="col">
15             <label for="nomeCliente" class="form-label black-text">NOME</label>
16             <input type="text" id="nomeCliente" class="form-control" value="GABRIEL LOBO" disabled>
17         </div>
18         <div class="col">
19             <label for="telefoneCliente" class="form-label black-text">TELEFONE</label>
20             <input type="text" id="telefoneCliente" class="form-control" value="(77) 98123-4653" disabled>
21         </div>
22         <div class="col">
23             <label for="cpf" class="form-label black-text">CPF</label>
24             <input type="text" id="cpf" class="form-control" value="000.000.000-00" disabled>
25         </div>
26     </div>
27
28     <section class="text-start mb-3">
29         <div class="row">
30             <p class="display-6 ms-auto">INSERIR ITENS</p>
31         </div>
32
33         <form method="GET" id="inserirItensVenda" action="">
34             <div class="row align-items-end d-flex">
35                 <div class="col">
```


#Localização

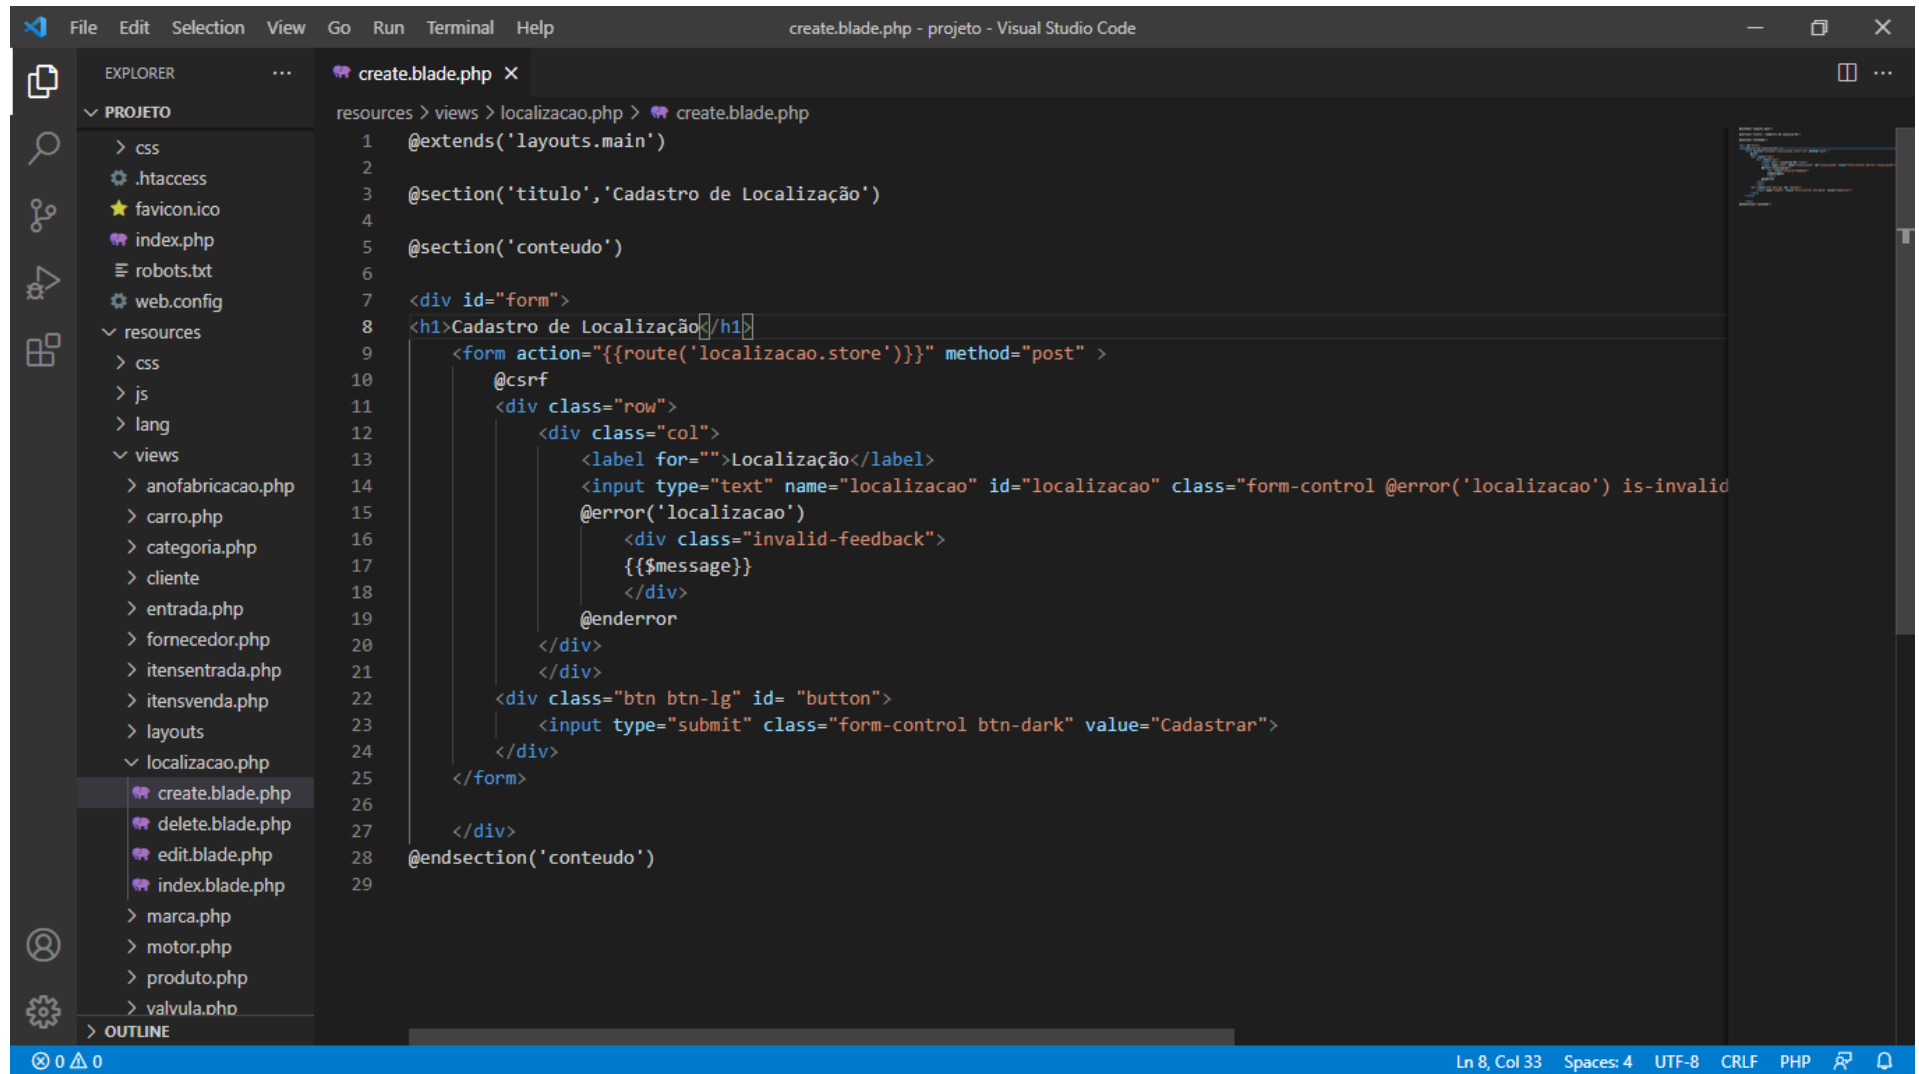

The image shows a Visual Studio Code editor window with a project named 'projeto'. The Explorer sidebar on the left shows the file structure, with the 'views' directory expanded, showing a file named 'localizacao.php'. The main editor area displays the content of 'create.blade.php', which is a Blade template for a registration form. The code includes a form with a text input, a submit button, and error handling for invalid input. The status bar at the bottom indicates the current line and column as 'Ln 8, Col 33'.

```
1 @extends('layouts.main')
2
3 @section('titulo','Cadastro de Localização')
4
5 @section('conteudo')
6
7 <div id="form">
8 <h1>Cadastro de Localização</h1>
9
10 <form action="{{route('localizacao.store')}}" method="post" >
11     @csrf
12     <div class="row">
13         <div class="col">
14             <label for="">Localização</label>
15             <input type="text" name="localizacao" id="localizacao" class="form-control @error('localizacao') is-invalid
16                 @error('localizacao')
17                 <div class="invalid-feedback">
18                     {{ $message }}
19                 </div>
20             @enderror
21         </div>
22         <div class="btn btn-lg" id="button">
23             <input type="submit" class="form-control btn-dark" value="Cadastrar">
24         </div>
25     </form>
26
27 </div>
28 @endsection('conteudo')
29
```

#Marca

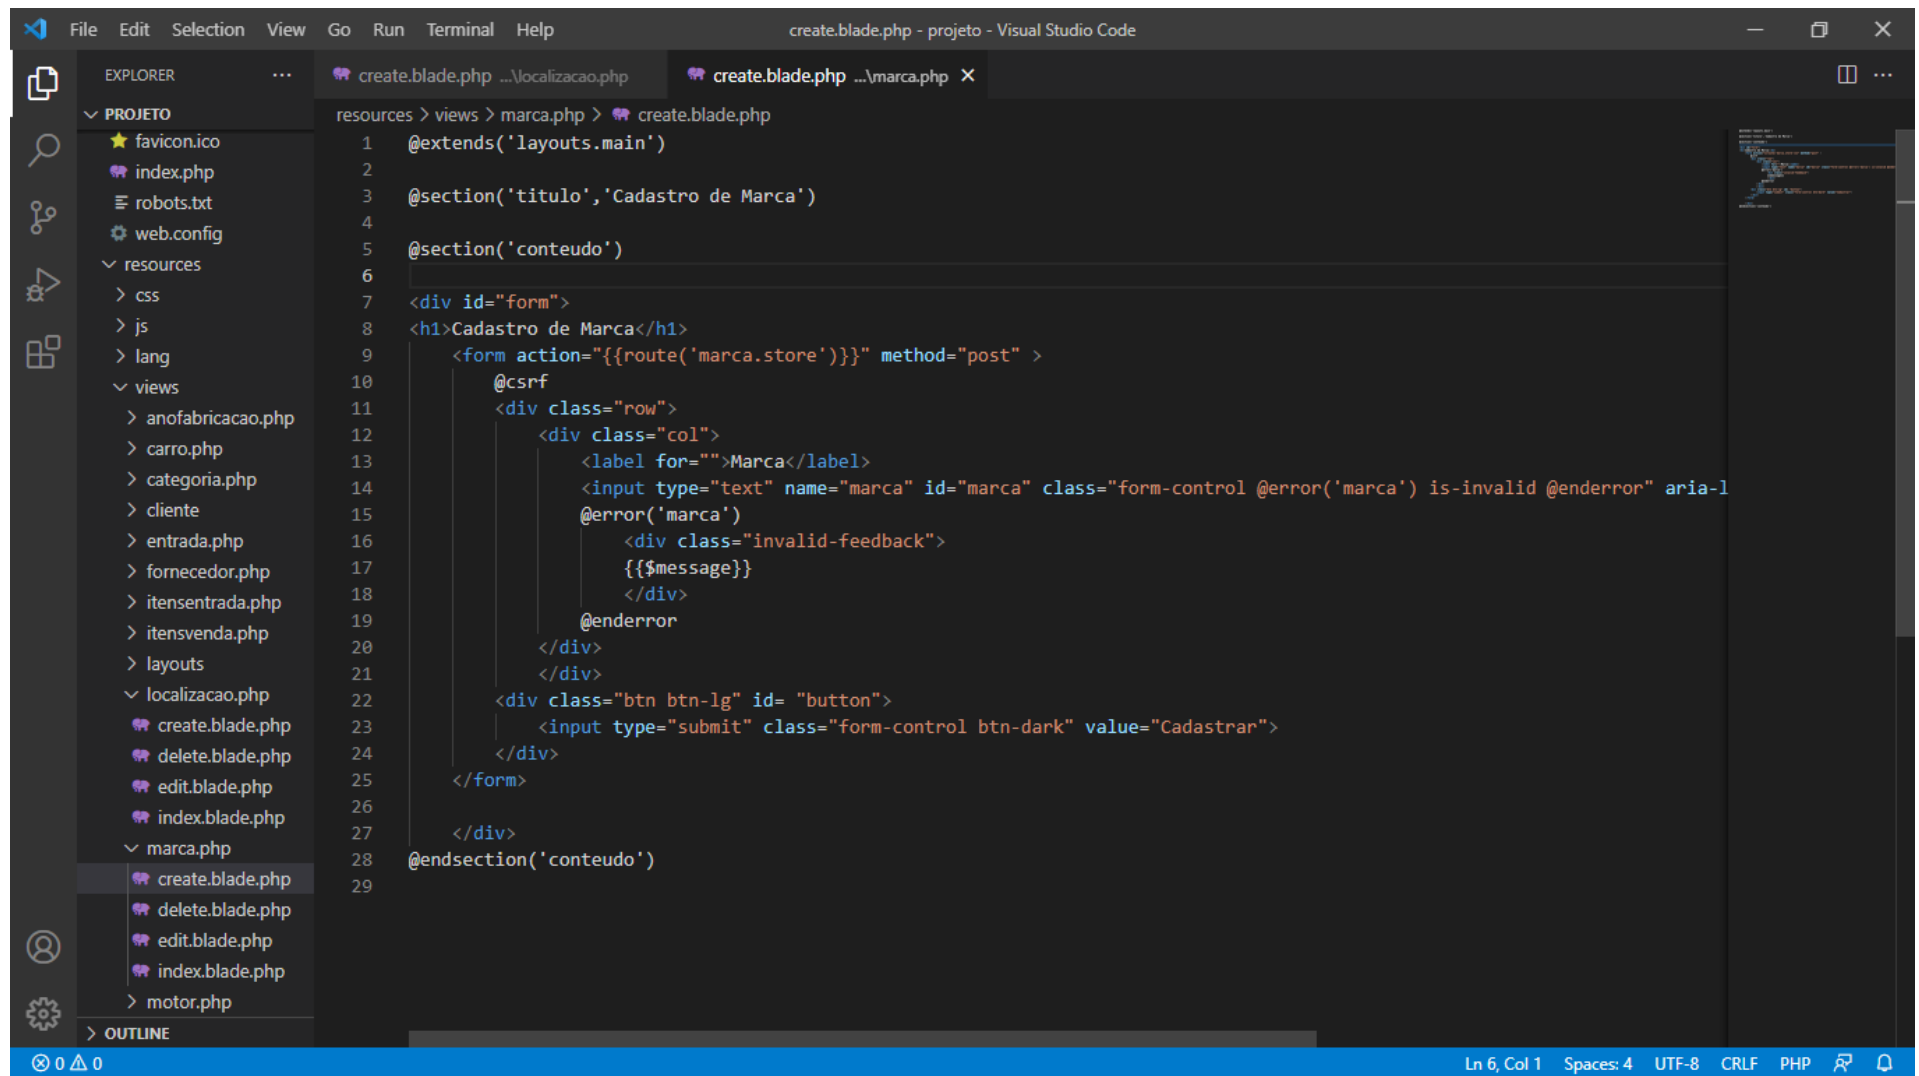


The image shows a Visual Studio Code editor window with the following components:

- Explorer Panel:** Displays the project structure. The 'views' directory is expanded, showing files like 'create.blade.php', 'delete.blade.php', 'edit.blade.php', and 'index.blade.php'. The 'marca.php' file is selected.
- Editor Panel:** Shows the content of 'create.blade.php'. The code is a Blade template for a brand creation form.
- Terminal Panel:** Empty.
- Status Bar:** Shows 'Ln 6, Col 1', 'Spaces: 4', 'UTF-8', 'CRLF', 'PHP', and icons for search, run, and debug.

```
1 @extends('layouts.main')
2
3 @section('titulo','Cadastro de Marca')
4
5 @section('conteudo')
6
7 <div id="form">
8 <h1>Cadastro de Marca</h1>
9 <form action="{{route('marca.store')}}" method="post" >
10     @csrf
11     <div class="row">
12         <div class="col">
13             <label for="">Marca</label>
14             <input type="text" name="marca" id="marca" class="form-control @error('marca') is-invalid @enderror" aria-label="marca">
15             @error('marca')
16                 <div class="invalid-feedback">
17                     {{ $message }}
18                 </div>
19             @enderror
20         </div>
21     </div>
22     <div class="btn btn-lg id= "button">
23         <input type="submit" class="form-control btn-dark" value="Cadastrar">
24     </div>
25 </form>
26
27 </div>
28 @endsection('conteudo')
29
```

#Motor

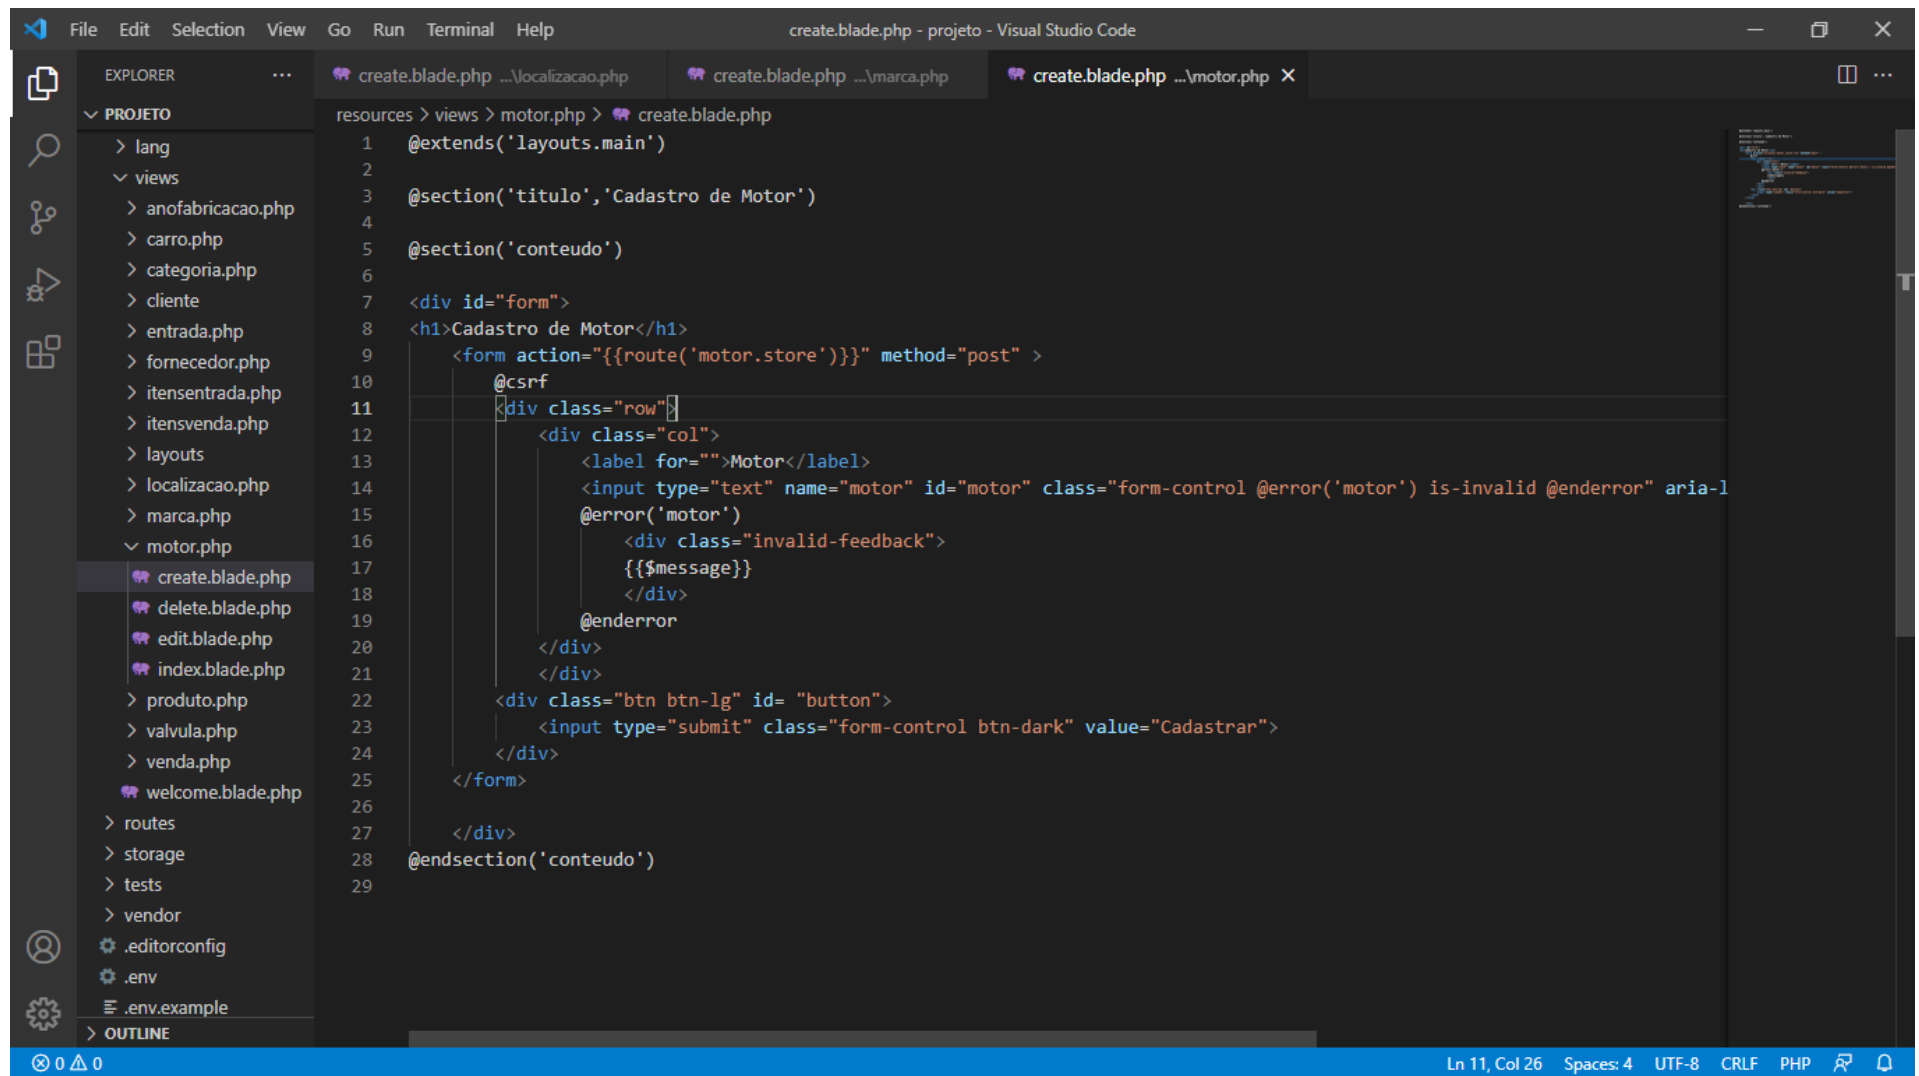


The image shows a Visual Studio Code editor window with a project named "projeto". The Explorer sidebar on the left shows a file tree with folders like "lang", "views", "resources", "routes", "storage", "tests", and "vendor". Under the "views" folder, there are several Blade templates including "create.blade.php", "delete.blade.php", "edit.blade.php", "index.blade.php", "produto.php", "valvula.php", "venda.php", and "welcome.blade.php". The "create.blade.php" file is selected and its content is displayed in the main editor area. The code is a Blade template for a motor registration form, featuring a form with a text input for the motor name, a submit button, and error handling for invalid input. The form is styled with Bootstrap classes like "form-control" and "btn-dark".

```
1 @extends('layouts.main')
2
3 @section('titulo','Cadastro de Motor')
4
5 @section('conteudo')
6
7 <div id="form">
8 <h1>Cadastro de Motor</h1>
9 <form action="{{route('motor.store')}}" method="post" >
10     @csrf
11     <div class="row">
12         <div class="col">
13             <label for="">Motor</label>
14             <input type="text" name="motor" id="motor" class="form-control @error('motor') is-invalid @enderror" aria-label="motor">
15             @error('motor')
16                 <div class="invalid-feedback">
17                     {{ $message }}
18                 </div>
19             @enderror
20         </div>
21     </div>
22     <div class="btn btn-lg id= "button">
23         <input type="submit" class="form-control btn-dark" value="Cadastrar">
24     </div>
25 </form>
26
27 </div>
28 @endsection('conteudo')
29
```

Ln 11, Col 26 Spaces: 4 UTF-8 CRLF PHP

#Valvula

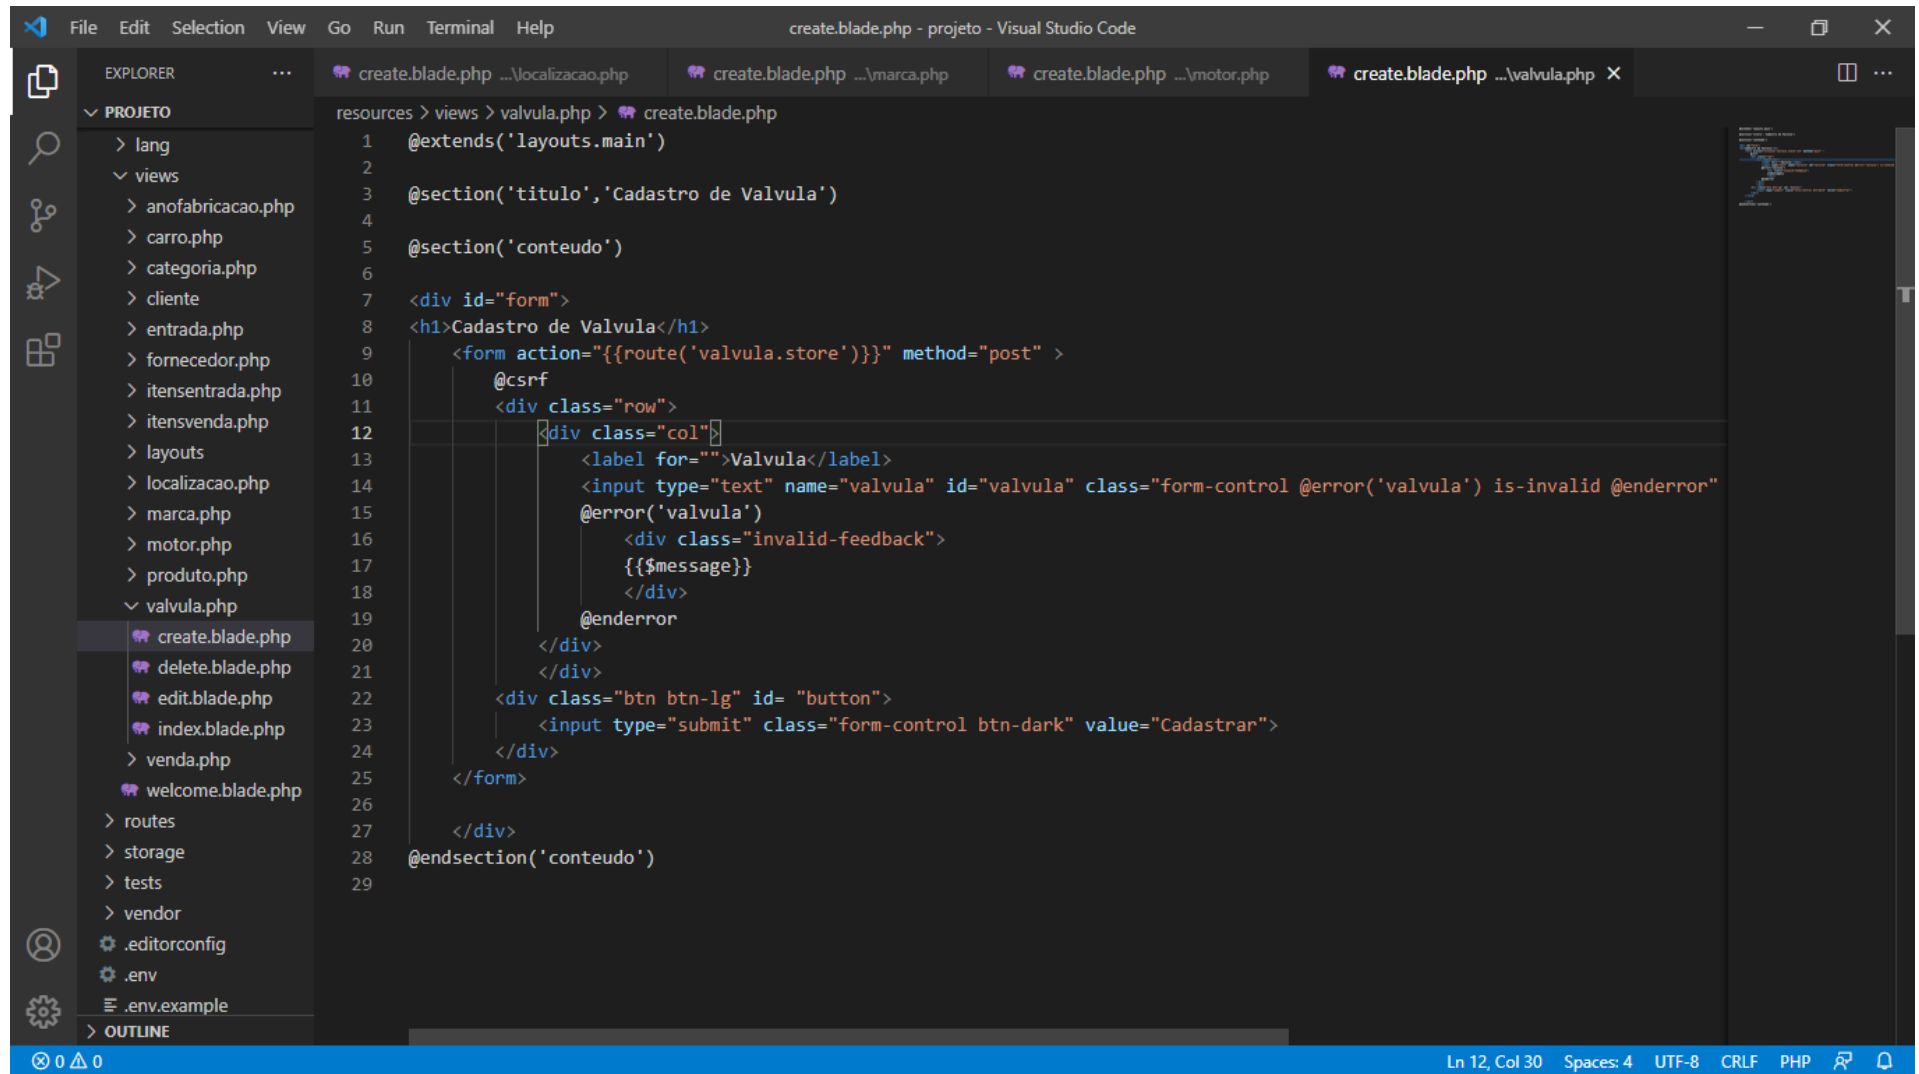

The image shows a Visual Studio Code editor window with the title bar "create.blade.php - projeto - Visual Studio Code". The Explorer sidebar on the left shows a project structure with folders like "lang", "views", "resources", "routes", "storage", "tests", and "vendor". The "views" folder is expanded, showing files like "anofabricacao.php", "carro.php", "categoria.php", "cliente.php", "entrada.php", "fornecedor.php", "itensentrada.php", "itensvenda.php", "layouts", "localizacao.php", "marca.php", "motor.php", "produto.php", "valvula.php", "venda.php", and "welcome.blade.php". The "valvula.php" file is selected and its content is displayed in the main editor area. The code is a Blade template for a "Cadastro de Valvula" form. It includes a form with a text input for "valvula" and a submit button. The form is enclosed in a @csrf directive and a @section('conteudo') directive. The input field has a class "form-control" and a @error('valvula') is-invalid @enderror directive. The submit button has a class "btn btn-lg" and a value "Cadastrar".

```
1 @extends('layouts.main')
2
3 @section('titulo','Cadastro de Valvula')
4
5 @section('conteudo')
6
7 <div id="form">
8 <h1>Cadastro de Valvula</h1>
9 <form action="{{route('valvula.store')}}" method="post" >
10     @csrf
11     <div class="row">
12         <div class="col">
13             <label for="">Valvula</label>
14             <input type="text" name="valvula" id="valvula" class="form-control @error('valvula') is-invalid @enderror"
15                 @error('valvula')
16                 <div class="invalid-feedback">
17                     {{ $message }}
18                 </div>
19             @enderror
20         </div>
21     </div>
22     <div class="btn btn-lg id= "button">
23         <input type="submit" class="form-control btn-dark" value="Cadastrar">
24     </div>
25 </form>
26
27 </div>
28 @endsection('conteudo')
29
```

Ln 12, Col 30 Spaces: 4 UTF-8 CRLF PHP

Socape

Cadastro de Cliente

Cpf

Cnpj

Nome

Débito

Cadastrar

Socape

Clientes Cadastrados

#	Cpf	Cnpj	Nome	Debito		
3	059.758.705-18	0	Ciclano	50	editar	deletar