
Collector

Collector Installation Guide

How to run collector JAR file

File Path of collector

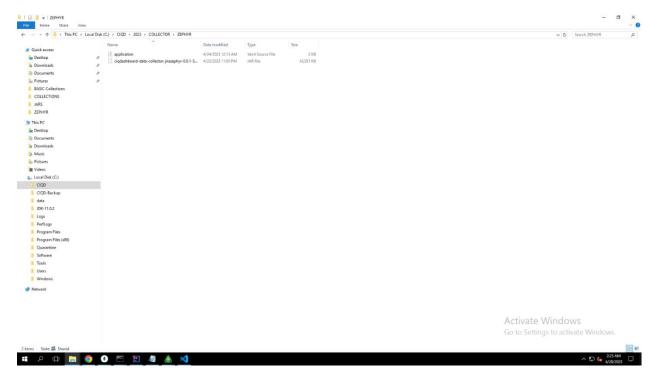

Application.yaml file

Application Name- CIQDashboard -JiraZephyr-collector

Collection name -issues, data

Zephyr Server:

URL: "https://prod-api.zephyr4jiracloud.com/connect"

Jira Server:

url: "https://sparshs.atlassian.net/rest/api/latest"

token: " "

projects: SAM, AC, MMT

period: 111

PORT-8088

Jasypt:

encryptor:

algorithm: PBEWITHHMACSHA512ANDAES_256

password: LeapSecurityKey

bean: JasyptEncryptorBean

Authentication Type: Bearer Token

```
The Los Section Way on the Third Holy Septiment (high speciment) (high spe
```

Change the Database Name in the Application.YAML File

Ex:(uri: mongodb://localhost:27017/<DatabaseName>)

```
data:
| mongodb:
| uri: mongodb://localhost:27017/ciqdashboard_qa_2023
```

```
| The field Section from Co from Normal Holp | Application (Cold) | Application (Sept.) | Application (Sept.)
```

Add the projects Name in the Application.YAML File

```
jiraServer:
unl: https://sparshs.atlassian.net/rest/api/latest
username: sparshs336@pmail.com
password: ATATT3NF16F6M_styYg1-hhxtes1E9cfP68ONEt2My3tTOSsDyejhCMLzwd4XLEQ8OARI21UGzscbybZmU-AXC_b8cceyVFdZHIxlL38Cnv86UShmFMgouisJApmygsLePlbjFRampFlthEY8KX\ArmPEmKHpzxvzVoF4p-00BU0j6XU55S_q0I-3E17A398
projects: Some
```

Steps to Run the Collector jar:

- 1. Run command prompt as administrator.
- 2. Copy the path of collector "cd:\CIQD\collector"
- 3. Type the command " java -jar ciqdashboard-data-collector-jirazephyr-0.0.1-SNAPSHOT".

