

# ***RIP-MD***

User Manual

S. Contreras & A.J.M. Martin

`scontreras@dlab.cl | alberto.martin@umayor.cl`

# Contents

<b>1</b>	<b>Introduction</b>	<b>3</b>
1.1	Purpose of RIP-MD . . . . .	3
1.2	What RIP-MD does . . . . .	3
1.3	RIP-MD flavors and availability . . . . .	4
1.4	How it works . . . . .	4
1.5	Citing Us . . . . .	6
<b>2</b>	<b>Getting and Installing <i>RIP-MD</i></b>	<b>7</b>
2.1	Getting RIP-MD . . . . .	7
2.2	Basic installation . . . . .	7
2.3	Advanced installation . . . . .	8
2.3.1	Installing RIP-MD as Standalone software . . . . .	8
2.3.2	Installing RIP-MD as VMD plugin . . . . .	9
<b>3</b>	<b>User Interface</b>	<b>11</b>
3.1	Webserver Interface . . . . .	11
3.2	Standalone Interface . . . . .	11
3.3	VMD plugin Interface . . . . .	11
<b>4</b>	<b>Running a Job</b>	<b>18</b>
4.1	Required Input . . . . .	18
4.2	Running a Job using the Webserver . . . . .	18
4.3	Running a Job using the Standalone software . . . . .	18
4.4	Running a Job using the VMD plugin Interface . . . . .	22
<b>5</b>	<b>Output Files and Displaying Results</b>	<b>23</b>
5.1	Output Files . . . . .	23
5.2	Displaying Results . . . . .	25
5.2.1	Using the RIP-MD plugin . . . . .	25
5.2.2	Using external software . . . . .	28
<b>A</b>	<b>Appendix</b>	<b>30</b>
A.1	Definition of $C_{\alpha}$ contacts . . . . .	30
A.2	Definition of Hydrogen Bonds . . . . .	30
A.3	Definition of Salt Bridges . . . . .	30
A.4	Definition of Disulfide Bonds . . . . .	31
A.5	Definition of cation- $\pi$ and $\pi$ - $\pi$ interactions . . . . .	31

A.6	Definition of arginine-arginine interactions . . . . .	32
A.7	Definition of Coulomb and van der Waals potential interactions	32

# 1 Introduction

## 1.1 Purpose of RIP-MD

To perform their function, proteins adopt a three dimensional structure that is mainly determined by non-covalent interactions. The structure of a protein is not static, residues may undergo conformational rearrangements, and in doing so, create, stabilize or break non-covalent interactions. Molecular Dynamics (MD) is a computational technique widely used to simulate these movements at atomic resolution. However, it is very difficult to gather relevant structural and functional information from MD simulations given the data-intensive nature of the technique. Consequently, several tools are often required to perform these highly complex analyses. Among these are Residue Interaction Networks (RINs), which have been used to facilitate the study of static protein structures. In a RIN, nodes represent Amino Acids (AAs) and the connections between nodes depict the non-covalent interactions that occur in the three dimensional structure of the protein. For this reason, we created *RIP-MD*, a tool that create RINs for a protein structure.

## 1.2 What RIP-MD does

RIP-MD generates RINs for static protein structures or from MD trajectory files. The non-covalent interactions defined by RIP-MD include Hydrogen bonds, Salt bridges, Van der Waals contacts, cation- $\pi$ ,  $\pi$ - $\pi$ , Arginine-Arginine and Coulomb interactions. In addition, RIP-MD also computes interactions based on distances between  $C_{\alpha}$ s and disulphide bridges.

Results of the analysis can be displayed in an user friendly interface. Moreover, the user can take advantage of the VMD visualization capacities, whereby through some effortless steps, it is possible to select and visualize interactions described for a single, several or all residues in a MD trajectory. Network and descriptive table files are also generated, allowing their further study in other specialized platforms. Furthermore RIP-MD generates correlation plots, where relationships between the dynamic behavior of different parts of the protein can be determined and quantified.

### 1.3 RIP-MD flavors and availability

RIP-MD comes in three different forms. The first one is as a webserver that can be accessed at <http://dlab.cl/ripmd> → “Star a Job” tab. This version was thought for people who wants to analyze a PDB structure without installing anything in local machines.

If you want to analyze a MD trajectory, or a static structure in a local machine, you can go to <http://dlab.cl/ripmd>, where in the “Download RIP-MD” section you can find the standalone and the VMD plugin version.

### 1.4 How it works

Basically, RIP-MD performs the workflow shown in fig. 1. Starting from a MD or a PDB file and input parameters (see chapter 4, fig. 1 A) it passes to a preprocessing step (fig. 1 B and 2) where input type, repeated residues and missing atoms are looked for. The next step is to compute interactions between residues (defined in appendix A) and in the last step the output is displayed either with the VMD plugin or on softwares such as Cytoscape<sup>1</sup>

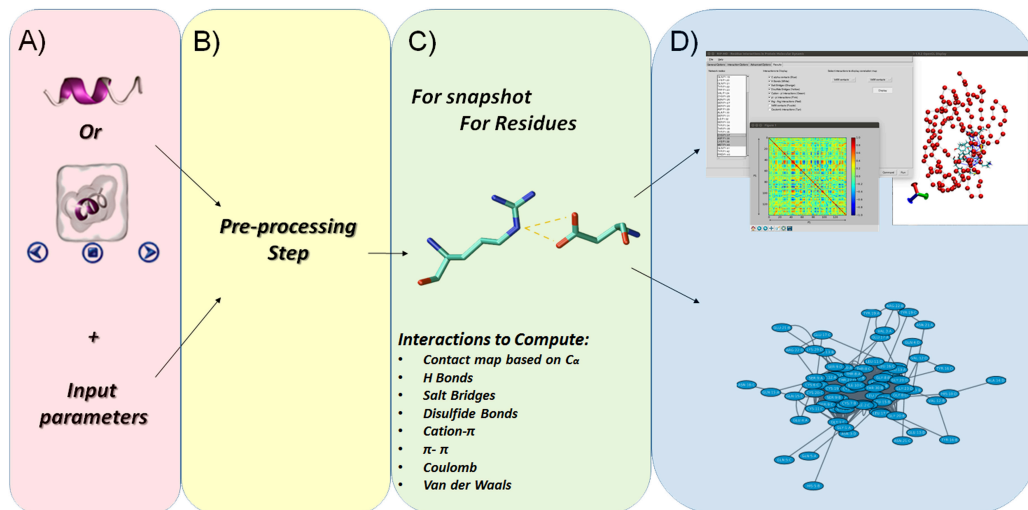


Figure 1: Workflow in *RIP-MD*. A) Input structural information and parameters. B) Pre-processing step. C) Definition of putative interactions as defined by the input parameters. D) Generation of output files.

<sup>1</sup>[www.cytoscape.org](http://www.cytoscape.org)

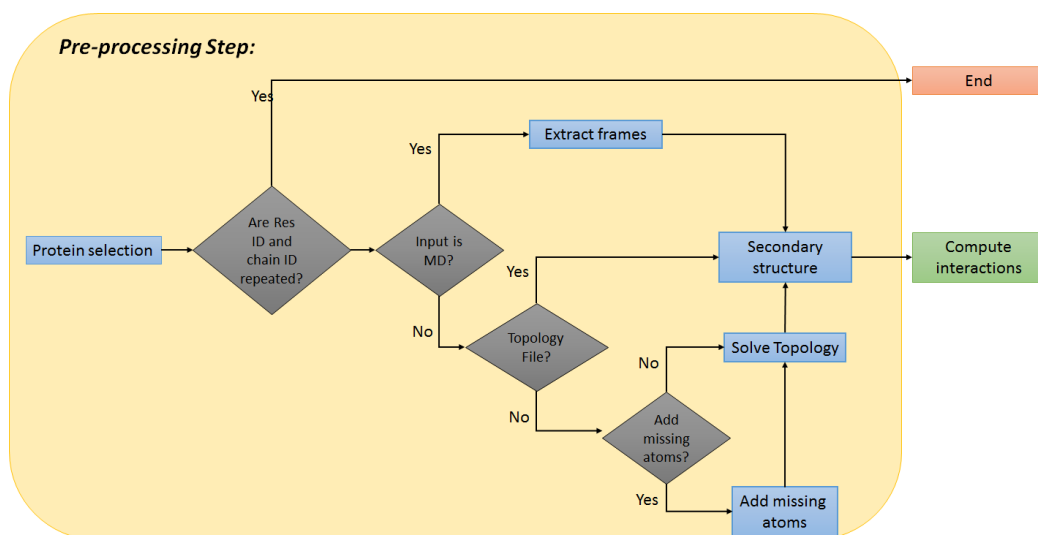


Figure 2: Preprocessing step. Starting with the protein selection all atoms not belonging to an AA are removed, as well as repeated residues. Then, if the structural input is a MD trajectory each frame is extracted, or otherwise a check for the existence of a topology file of the initial PDB is performed. In this last case, if the user wishes it, missing atoms will be added, to end up calculating some AA properties such as secondary structure and SASA.

## 1.5 Citing Us

At this moment, RIP-MD is under revision, as soon as possible we will add and update the information to cite this work

## 2 Getting and Installing *RIP-MD*

In order to generate a correct local installation of the software, you need to run in your machine a Linux distribution. We strongly recommend to use RIP-MD under Debian<sup>2</sup> or Ubuntu<sup>3</sup> Linux distributions since we know it works there. However, if you only want to use the graphical user interface (VMD plugin), you can use it in any system where VMD can be installed, and then save the jobs to visualize in a Linux machine.

As a second requirement, you need to have *python* version 2.7 or higher to run the program, however it will not run under python3 due to some dependencies not implemented yet in python3.

If you want to use the Plugin user interface, an extra requirement is to have installed VMD<sup>4</sup> in your system.

### 2.1 Getting RIP-MD

You can download RIP-MD from <http://d1ab.cl/ripmd>. In the “Download RIP-MD” tab you will see a table with links to download the software in all available forms. After you have downloaded RIP-MD, you need to uncompress it.

### 2.2 Basic installation

To simplify the process of installing RIP-MD, two bash scripts are provided and should be run in this order:

- *requirements.sh*: This script should be executed in sudo mode (using sudo in Ubuntu or changing to the super user using su in debian). This script looks if python pip is installed and when not, the script will install it. Once pip is installed in your system, then the script will read the “libraries” file, and will install all dependencies.
- *install.sh*: This script should be executed as normal user. This script will ask you if you want to install the standalone core of RIP-MD, the Plugin version or both and then will ask the path where files must be placed.

---

<sup>2</sup>[www.debian.org](http://www.debian.org)

<sup>3</sup>[www.ubuntu.com](http://www.ubuntu.com)

<sup>4</sup>[www.ks.uiuc.edu/Research/vmd](http://www.ks.uiuc.edu/Research/vmd)



Warning: After the installation process you should close the terminal (or use another terminal) before use RIP-MD in order to recognize a new environment variable

Warning: VMD plugin installation could fail in the last step (i.e., adding the new plugin to file `.vmdrc`). If it happens, an error text will appear at the end of the installation script, giving instructions on how to fix it

## 2.3 Advanced installation

### 2.3.1 Installing RIP-MD as Standalone software

In order to install the required dependencies of RIP-MD, the first step is to install and upgrade *python pip* through the following commands:

```
• apt-get install python-pip python-dev build-essential
• pip install --upgrade pip
```

After Pip is installed, you need to install some libraries using the following command:

```
pip install -r libraries
```

where “libraries” is a file placed in the RIP-MD installation folder. This command will install the following python libraries:

- biopython v1.70<sup>a</sup>
- matplotlib v2.1.0<sup>b</sup>
- MDAnalysis v0.16.2<sup>c</sup>
- networkx v2.0<sup>d</sup>
- numpy v1.13.3<sup>e</sup>
- scipy v1.0.0<sup>f</sup>

---

<sup>a</sup>[www.biopython.org/](http://www.biopython.org/)

<sup>b</sup>[www.matplotlib.org](http://www.matplotlib.org)

<sup>c</sup>[www.mdanalysis.org](http://www.mdanalysis.org)

<sup>d</sup>[networkx.github.io](http://networkx.github.io)

<sup>e</sup>[www.numpy.org](http://www.numpy.org)

<sup>f</sup>[www.scipy.org](http://www.scipy.org)

When these dependencies are met, you need to copy the “RIP-MD” folder in your desired path (e.g.: in your \$HOME path). The last step is to create a environment variable in .bashrc file. You can do it using the following command:

```
echo "export RIP_MD=$InstallationFolder/RIP-MD" >>
    $HOME/.bashrc
```

Where \$InstallationFolder is the path where RIP-MD folder is located. Then you can run RIP-MD through the following command:

```
python $RIP_MD/main.py
```

### 2.3.2 Installing RIP-MD as VMD plugin

If you want to install the VMD plugin version of RIP-MD, you need to move the “RIP-MD\_vmd” folder into VMD plugin path (by default in /usr/local/lib/vmd/plugin/noarch/tcl/ in Ubuntu/Debian, or in C:\Program Files (x86)\University of Illinois\VMD\plugins\noarch\tcl in Windows), and

after moving it you need to rename it from RIP-MD\_vmd to RIP-MD. After these steps you need to modify (as Root) the *.vmcdr* file (usually located in `/usr/local/lib/vmd/` in Ubuntu/Debian or in `C:\\Program Files (x86)\\University of Illinois\\VMD\\` in Windows) and add the following text to the end of the file:

```
vmd_install_extension ripmd ripmd_tk "Analysis/RIP-MD"
```

Then you can open VMD and in the “Extension” menu, go to Analysis → RIP-MD. If everything was ok, the RIP-MD plugin will appear on your screen.

## 3 User Interface

This section describes in a simple way the user interface of RIP-MD. Additional information about these interfaces can be found in Section 4.

### 3.1 Webserver Interface

When you access `http://dlab.cl/ripmd` you will see an interface similar to fig. 3. If you want to start a new job in the web application, you need to navigate to “Start a Job” tab (fig. 3 red dashed box) and then you will see a window similar to figure 4. This page contains a form to select your protein structure (fig. 4 red dashed line), input parameters (fig. 4 blue dashed line), advanced options (fig. 4 yellow dashed line) and a button to start the job (fig. 4 brown dashed line). For more information on how to start a job using the web platform, please refer to section 4.2.

### 3.2 Standalone Interface

As standalone program, it use the system terminal to execute RIP-MD as can be seen on fig. 5. For usage please refer to section 4.3

### 3.3 VMD plugin Interface

If you installed the plugin, you will see a similar window to that shown in fig 6. In that window you can select and modify some input parameters, such as interactions to be included in the analysis, format for the output and folder where the output will be stored. In this window there is also a tab section to change other parameters. In the “Interaction Options” tab, you will see something like fig. 7, where parameters that define a interaction can be changed. If you click on the “Advanced Options” tab, you will see a window like in fig. 8, where you can select options to add missing atoms, the number of processors to employ, percentage of simulated time to consider interactions to display in the MD consensus graph, and the other parameters. In the “Results” tab, you will see and be able to analyze the results of your analysis. Here, you will also be able to select nodes (AAs) and which interactions will be displayed in VMD or employed to plot Pearson correlations.

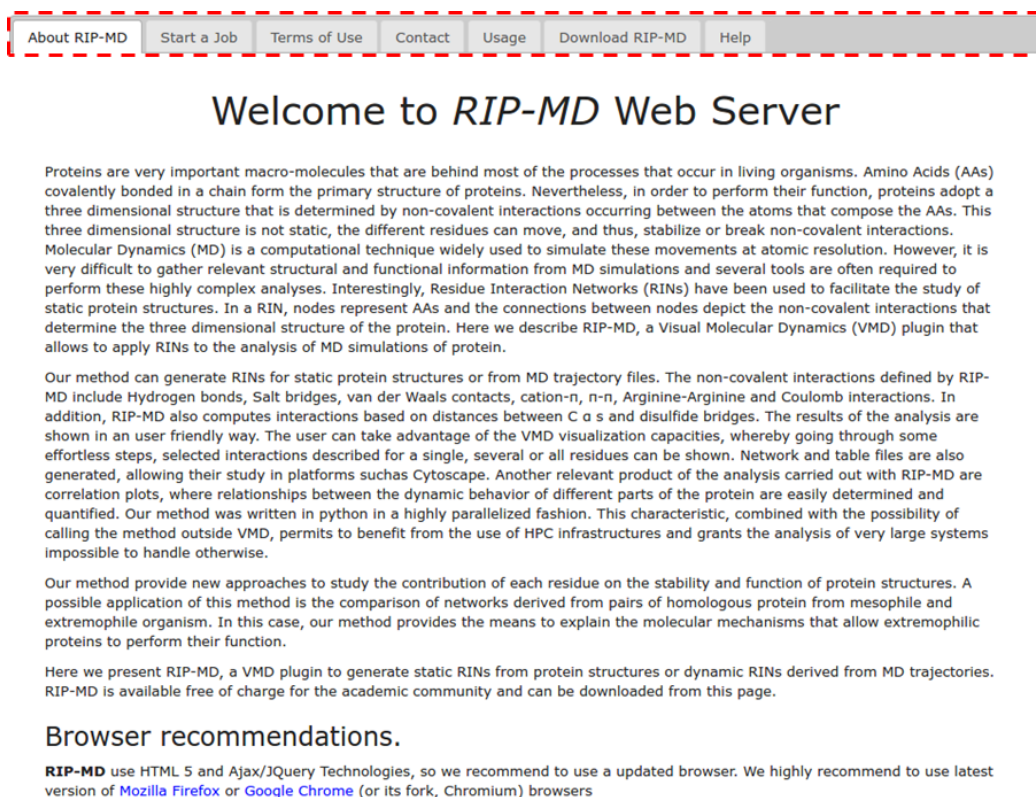


Figure 3: Welcome interface of web version of RIP-MD. The red dashed box highlights the menu to change between different sections of the application.

**PDB to analyze:**  No file selected.

☐ **Add missing atoms (including H atoms) using PDB2PQR (with CHARMM force field and pH: 7.0)**

**PSF (optional):**  No file selected.

☐ **Or you can use our example files (PDB ID 2BG9)**

**Output Graph Format:**

**Job ID (optional):**

**Email (optional):**

Figure 4: Start job interface of the web application.

```
@pc:~$ python $RIP_MD/main.py --help
usage: main.py [-h] [-V] [-D DCD] [-S PSF] [-P PDB] [-sel SELECTION]
               [-O OUTPUT] [-N NPROC] [-ma] [-ph PH] [-ff FORCE_FIELD]
               [-pf PARAMETER_FILE] [-ca] [-cad CA_DIST] [-H] [-hd H_DIST]
               [-ha H_ANGLE] [-s] [-sd S_DISTANCE] [-ss] [-ssd SS_DISTANCE]
               [-ssa SS_ANGLE] [-cp] [-cpd CATION_PI_DISTANCE]
               [-cpa1 CP_ANGLE1] [-cpa2 CP_ANGLE2] [-cpa3 CP_ANGLE3]
               [-cpa4 CP_ANGLE4] [-pp] [-ppd PI_PI_DISTANCE] [-rr]
               [-rrd ARG_ARG_DISTANCE] [-v] [-ve VDW_EXCLUDED] [-vr VDW_RANGE]
               [-c] [-RF] [-Ecs SIMULATED_PERMITTIVITY] [-Erf RF_PERMITTIVITY]
               [-T TEMPERATURE] [-Krf INVERSE_DEBYE_SCREENING]
               [-Rrf DISTANCE_THRESHOLD] [-ce COULOMB_EXCLUDED] [-t TIME]
               [-gf GFORMAT] [-pc] [-p] [-sf SEPARATION_FRAME]
               [-fs FRAME_START] [-fe FRAME_END] [-rf REFERENCE_FRAME]
```

Figure 5: Standalone interface showing all options of RIP-MD.

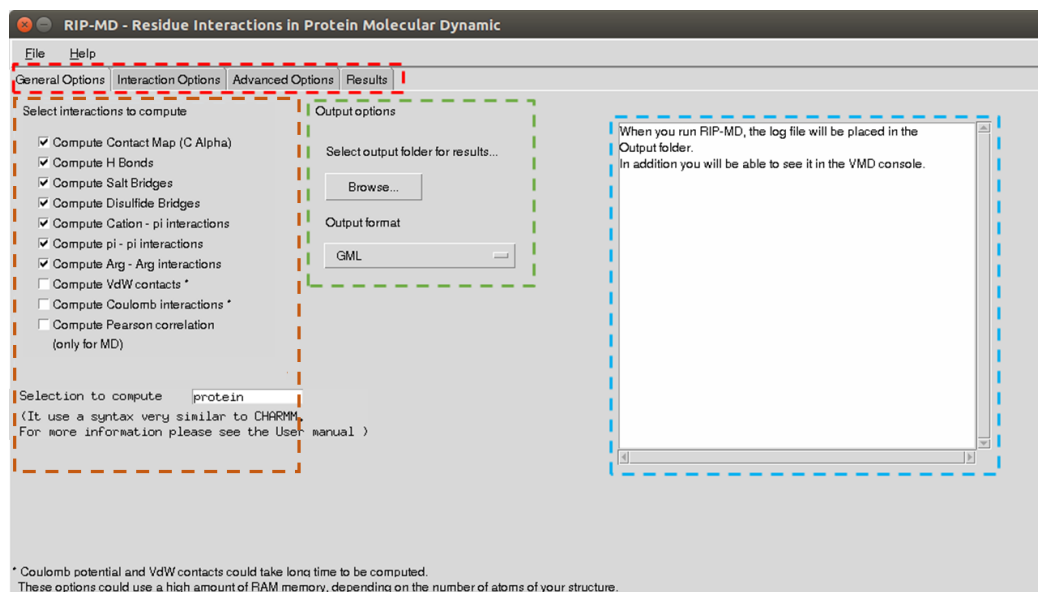


Figure 6: Main interface of RIP-MD. Each colored dashed box represents a distinct element of the software. The red box is the Tab menu of RIP-MD; Brown box is interactions and selection to compute ; Green box: Output options. Light blue box: Output text of the software. Purple box: Buttons to save the command to execute RIP-MD and button to Run directly RIP-MD.

**RIP-MD - Residue Interactions in Protein Molecular Dynamic**

File Help

General Options Interaction Options **Advanced Options** Results

Options for C alpha contacts		Simulated permittivity		1	
Distance cutoff between alpha C's	8 Å	Inverse debye screening		0	
Options for HBonds		Distance threshold		12 Å	
Distance between donor/acceptor atoms	3 Å	Covalent bonds distance cutoff		3	
Angle between donor/acceptor vectors	120 °	Option for Cation - pi interactions			
Options for Salt Bridges		Distance between cation and ring center of mass		7 Å	
Distance cutoff between atoms	6 Å	Angle between center of mass and normal vector of aromatic ring		0 °	and 60 °
Options for pi - pi interactions				120 °	and 180 °
Distance between ring center of mass	6 Å	Options for Disulfide Bridges			
Options for Arg - Arg interactions		Distance cutoff between sulfur atoms		3 Å	
Distance between Z C's	5 Å	Range of Angles between CS vectors		60 °	and 90 °
Options for Coulomb Potential contacts		Options for VdW contacts			
<input checked="" type="checkbox"/> Use reaction field		Covalent bonds distance cutoff		3	
Reaction field permittivity	82	Range of distance between two atoms		-0.1 Å	and 3 Å
Temperature for thermal noise cutoff	298.5 K				

Command Run

Figure 7: Interaction Options tab. Here you can modify distance, angle, and all parameters employed to define each type of interactions.



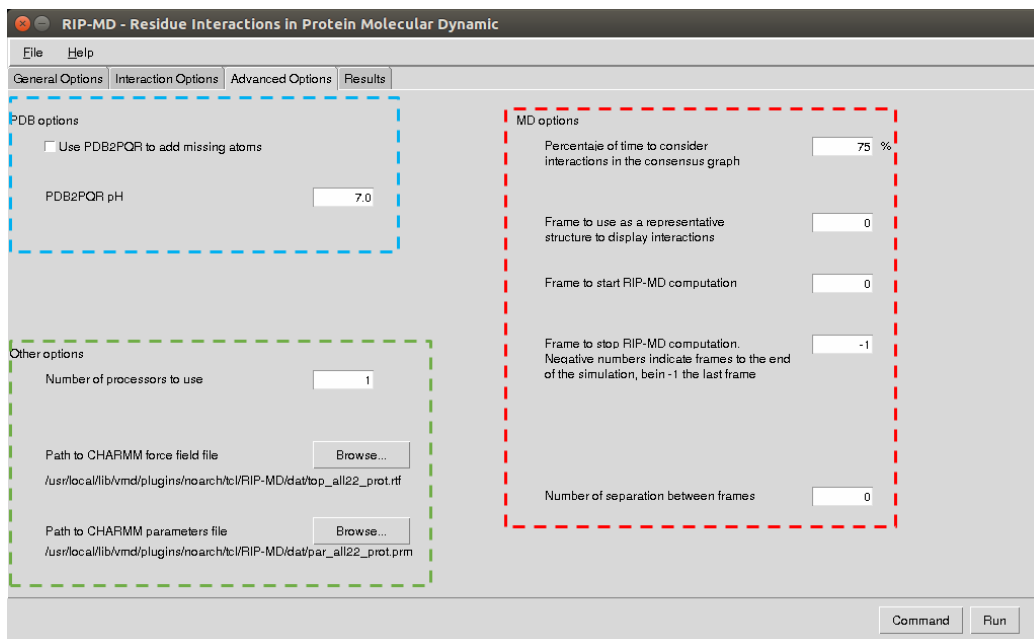


Figure 8: Advanced options of RIP-MD. Light blue dashed box: PDB options, to add missing atoms using *PDB2PQR* software and the pH to compute it. Red dashed box: MD options, to select percentage of simulation time to define interactions that will appear in the consensus graph, frame to use as representative structure and to display results in the VMD interface, and the frame to start and stop the calculation and the separation between frames to analyze. Green dashed box: other options that can be defined by the user (number of processors to use, path to forcefield file and parameter file).

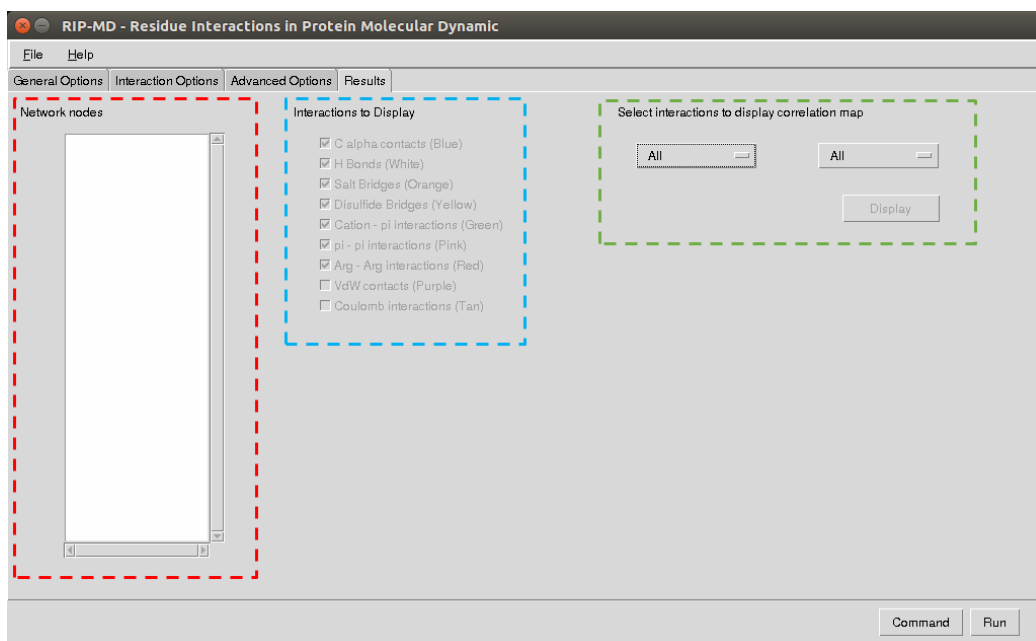


Figure 9: Results tab. Red dashed box: Interface to select nodes to display in the VMD interface. Light blue dashed box: menu to select which interactions you want to see. Green dashed box: selection menu to define the interactions that will be employed to generate Pearson correlation plots.

## 4 Running a Job

### 4.1 Required Input

Two class of inputs are supported by RIP-MD. The first class are MD trajectories, using both DCD and PSF files as input. The second class of input are static structures. In this case, RIP-MD requires a PDB file, and optionally a PSF file.

We will perform a little review in the next subsections for the specific parameters for each type of interaction, but for additional information please refer to Appendix A

### 4.2 Running a Job using the Webserver

In section 3.1 we learn about the interface of the RIP-MD web application in a summarized form. In this section we will explain in a more detailed way how to start a job using this form of RIP-MD.

As can be seen in fig. 4 there are four main sections, where in the red dashed square contains the box to define the input to upload the structural data (a PDB file and an optional PSF). In addition, there are two extra options, the first one is to add missing atoms (including H atoms), and the second option allows to run a job using example files as a way to test what you can do with this software. In the blue dashed square of the fig. 4 you have the two options for the output graph format, a job identifier and your email, both optional. The yellow dashed square of fig. 4, you have a button to display options to change the parameters that define interactions. If you click on it you will see something similar to fig. 10.

When the job finishes, If you provided an email address you are going to receive an email with a link to display your results, however if you do not do it you can save the address in your bookmarks (or wait until job is done) and then download results files.

### 4.3 Running a Job using the Standalone software

The basic command to start RIP-MD was shown in section 2.3.1. However, all options that can be employed with RIP-MD are displayed with a short description for each option using the follow command in your terminal as

### Distance between C<sub>α</sub>.

**Calculate Distance between C<sub>α</sub>** ☒

Distance cutoff between C<sub>α</sub>  Å

### HBonds.

**Calculate HBonds** ☒

Distance between Atoms  Å

Angle between Atoms  °

### Salt Bridges.

**Calculate Salt Bridges** ☒

Distance between Atoms  Å

### Disulfide Bridges.

**Calculate Disulfide Bridges** ☒

Distance between Atoms  Å

Angle between vector formed by C-S atoms  ° and  °

Figure 10: Web interface where the parameters that define interactions can be set.

shown in fig. 5.

```
python $RIP_MD/main.py --help
```

The most basic parameters to run a job are shown in the following text box:

- -D DCD, --dcd DCD: Route to the DCD file
- -S PSF, --psf PSF: Route to the PSF file
- -P PDB, --pdb PDB: Route to the PDB file
- -sel SELECTION, --selection SELECTION: Protein selection in CHARMM like format (as defined in MDAnalysis) to perform RINs. Default: "protein"
- -O OUTPUT, --output OUTPUT: Path to save results
- -ca, --calpha: Calculate  $C_{\alpha}$  contacts
- -H, --hbond: Calculate Hbonds
- -s, --salt: Calculate Salt bridges
- -ss, --disulfide: Calculate disulfide bonds
- -cp, --cation\_pi: Calculate cation- $\pi$  interactions
- -pp, --pi\_pi: Calculate  $\pi$ - $\pi$  interactions
- -rr, --arg\_arg: Calculate ARG-ARG interactions
- -v, --vdw: Calculate Van der Waals interaction network
- -c, --coulomb: Calculate Coulomb potential between charged groups of each amino acid as defined in the CHARMM force field
- -pc, --Pearson\_corr: Calculate Pearson Correlation between residue interactions
- -p, --plot\_Pearson: Generate plots figures for computed correlations

Running RIP-MD in a console may be difficult, nevertheless, using the plugin you can select your desired configuration and save the command to run it. This will be explained in section 4.4

## 4.4 Running a Job using the VMD plugin Interface

We have already seen in section 3.3 how to use the plugin and the graphical user interface. So, to compute RINs for your protein, the first thing that you need to do is to load a structure in VMD (PDB, PDB + PSF or DCD and PSF files) then you need to open the plugin and select those interactions together with the protein selection (in CHARMM-like format, for more information please refer to the MDAnalysis web page<sup>5</sup>) that you want to analyze as shown in fig. 6 (brown box). Following that, you need to choose the folder where you want to put the results and the format of the result graphs (fig. 6 green box).

To change any parameter that defines interactions, you can go to the “Interaction Options” tab (fig 7). For more information about the definition of interactions, please refer to appendix A.

Then, in the “Advanced Options tab” you can select the option to add missing atoms (including hydrogens) for a single PDB with *PDB2PQR* and the pH that will be used to do it (fig. 8 light blue box). If you are not working with a static structure, in the MD options section (fig. 8 red box) you can define the percentage of the simulated time to consider an interaction that will appear in the results graph, the frame to use as representative structure to display results in the VMD window, the starting and ending frame to compute RINs (by default first frame or 0 and the last frame or  $-1$ , where negative numbers refer to the number of frames until the end of the simulation, being  $-1$  the last frame,  $-2$  the previous frame, and so on) and the number of frames that will be skipped between the starting and ending frame (by default 0).

Other options (fig. 8 green box) are the number of processors to use in the RINs calculation and paths to force field file and the parameter file (by default 1 processor and local CHARMM files in the installation folder).

In the last step, to run the job, you need to click in the “Run” button (fig. 6 purple box). Nevertheless instead of using the Run button, you can use the command button. After doing it a “Save command” screen will appear and you will need to select a folder to save a plain text file with the command to execute the standalone RIP-MD version. With this command you can run the job locally or in another machine.

---

<sup>5</sup>[https://www.mdanalysis.org/docs/documentation\\_pages/selections.html](https://www.mdanalysis.org/docs/documentation_pages/selections.html)

## 5 Output Files and Displaying Results

### 5.1 Output Files

When a new job is going to be executed, RIP-MD asks for an output folder (or a job ID if you are using the web application. This folder will be the root of a directory that will contain the RIP-MD results as can be seen in fig. 11. There you will find two text files (“output.log” and “README”) and a new folder called “RIP-MD\_Results”.

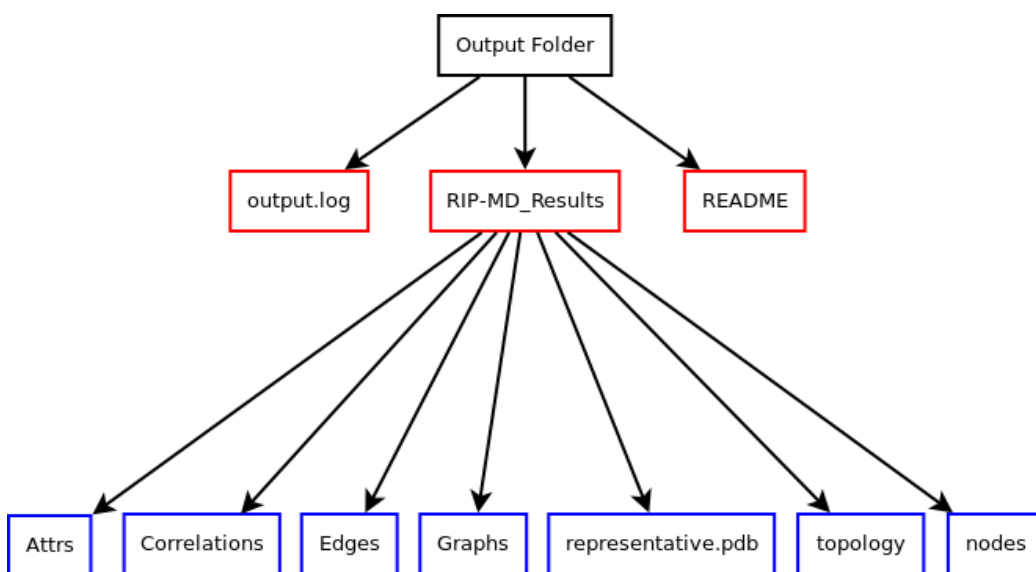


Figure 11: Result folder structure. This folder is divided in three levels (black, red and blue boxes). Output Folder is used to place all created files. In the second level (red boxes), there will be a log file file (output.log), the README file, together with RIP-MD \_Results folder. In the third level (blue boxes) there are folders and files created for results.

Next we show a list that summarizes each file/folder that appears in fig. 11

- **output.log:** A simple text file that shows the progress or events that happened during RIP-MD execution.
- **README:** Another text file that explains the components created by the software in the output folder.



- **RIP-MD \_Results:** This folder contains the files with the results of RIP-MD
  - **Attrs:** Folder that contains *.attr* file for each snapshot of the MD (or a single if input is a single PDB structure). Each of these files have the attributes of each frame such as secondary structure and SASA.
  - **Correlations:** Folder with Pearson correlations as a text and/or png format if *plot\_corr* option was selected. Only for MD analysis and only if Pearson correlations were computed.
  - **Edges:** Folder that contains *.edge* files for each frame of the MD (or a single if the input is a single PDB structure). Each files present all interactions found.
  - **Graphs:** Folder containing graphs for each interaction computed and a graph containing all interactions (called consensus graph). Supported graph formats are
    - \* GML
    - \* EdgeList
    - \* GraphML
    - \* Pajek

Also placed in this folder, there will be a file called “consensus\_as\_list”. This file is used to display interactions in the VMD plugin.

  - **representative.pdb:** A protein structure in *PDB* format that will be used for the VMD plugin to display both: interactions and protein structure.
  - **topology:** Graph file created only if you calculated VDW and/or Coulomb interactions. This file describes the protein topology (data copied from PSF file if it was provided or created *de novo* starting from the protein structure). This file describes data such as VDW radius and bond distances between different atoms.
  - **nodes:** A simple text with node names and IDs for RIP-MD internal usage.

## 5.2 Displaying Results

### 5.2.1 Using the RIP-MD plugin

Once a RIP-MD job is finished, you can display the results in the plugin version. If the job run directly in the plugin version, its results will automatically be loaded and they can be analyzed by clicking in the “Results” tab (see fig. 6 red box). If you use the web application or the standalone mode of RIP-MD, you need to go to “File → Open results”. Then, you need to open an output folder as shown in fig. 12 (red boxes). After this step, click on the OK button (fig. 12 purple dashed box) to load the results into VMD. Now the result section of RIP-MD will look like in fig. 13 and VMD will load your structure that will look similar to fig. 14.

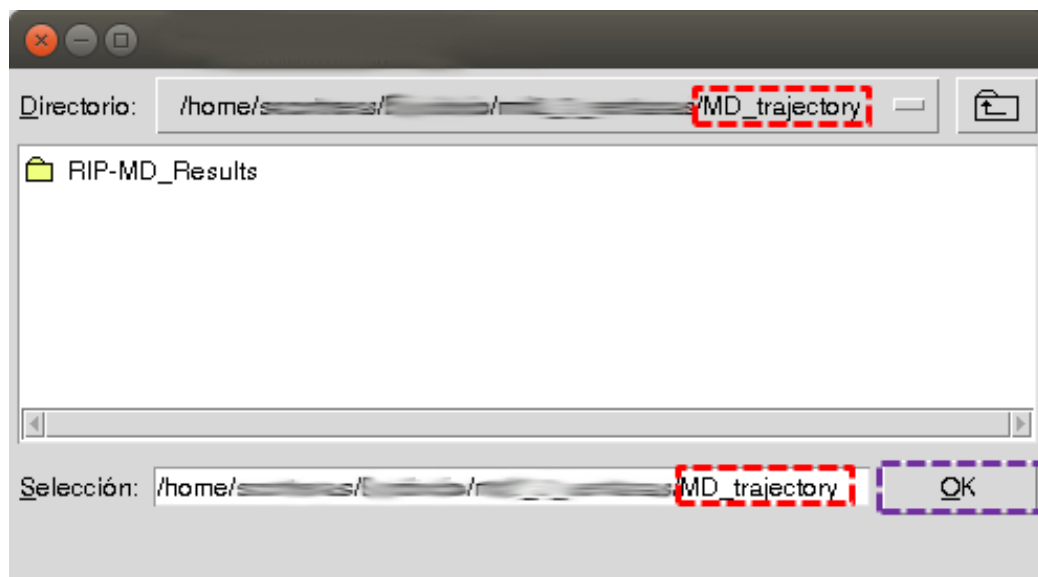


Figure 12: Choose directory window.

To display interaction in the VMD window, you need to select those interactions that you want to analyze, for example  $C_{\alpha}$  contacts you can also select those nodes to study (an example is TRP23 of segment P1 in fig. 13). Now in the VMD you will see interacting amino acids and dashed lines representing interactions like in fig. 15.

In the case that you want to analyze the correlation between interactions of pairs of residues, you can select this option and then click in the “Display”

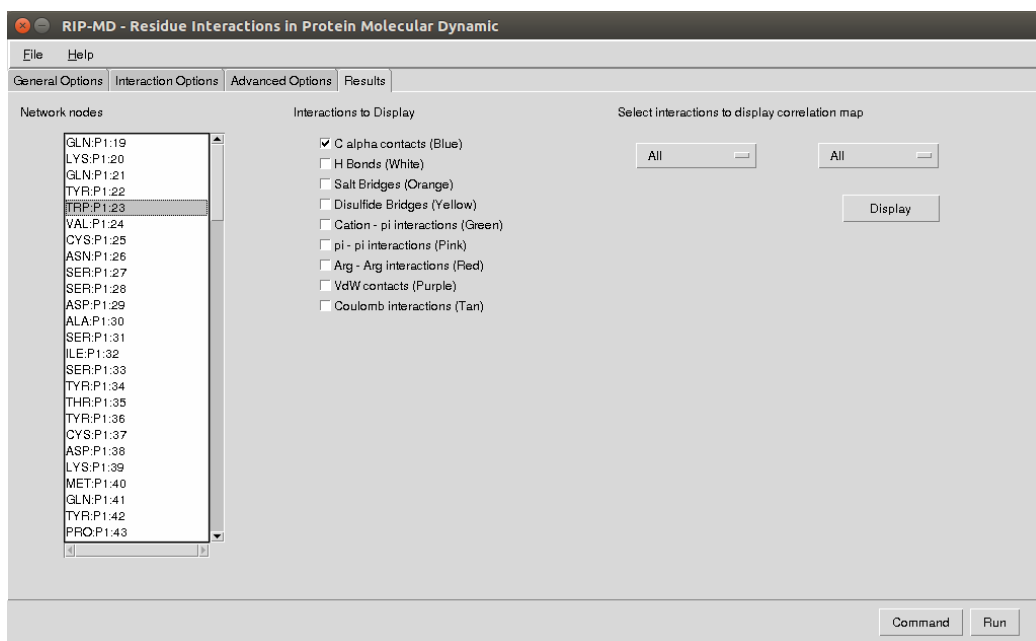


Figure 13: Results loaded in the RIP-MD plugin.

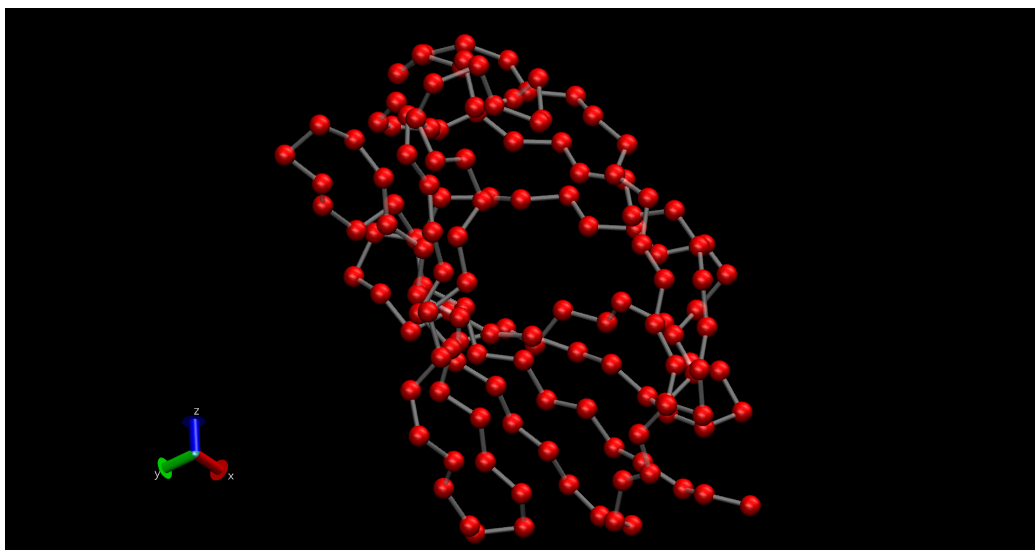


Figure 14: Results loaded in the VMD window. Red balls are amino acids, while gray sticks represent peptidic bonds.

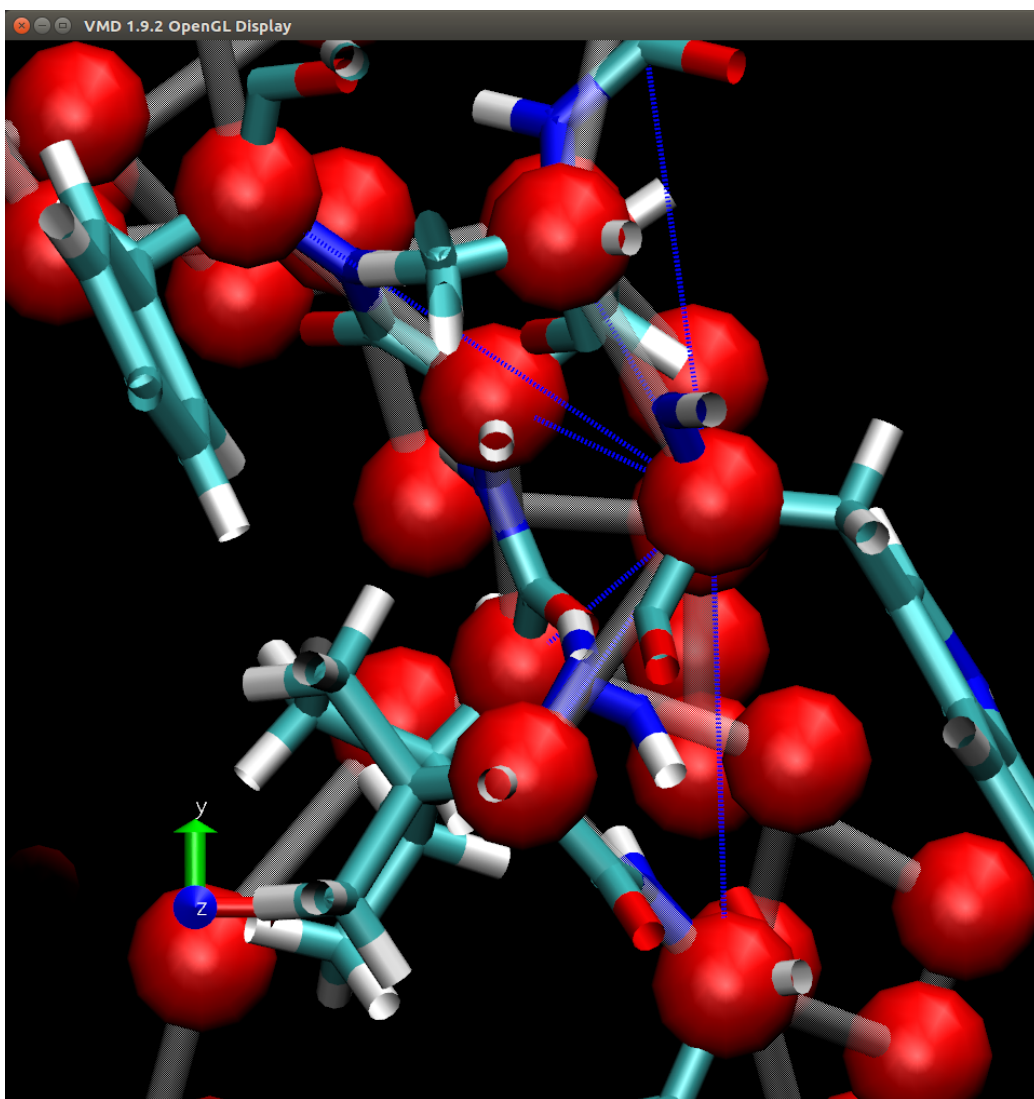


Figure 15: Analyzing interactions in the VMD window. Interacting residues are shown as sticks and non-covalent interactions are represented by dashed lines, in this case,  $C_{\alpha}$  contacts.

button (as in fig. 9 green dashed box section). A new window will appear similar to fig. 16 showing the Pearson correlation plot, where you will be able to select determined zones or to save the plot.

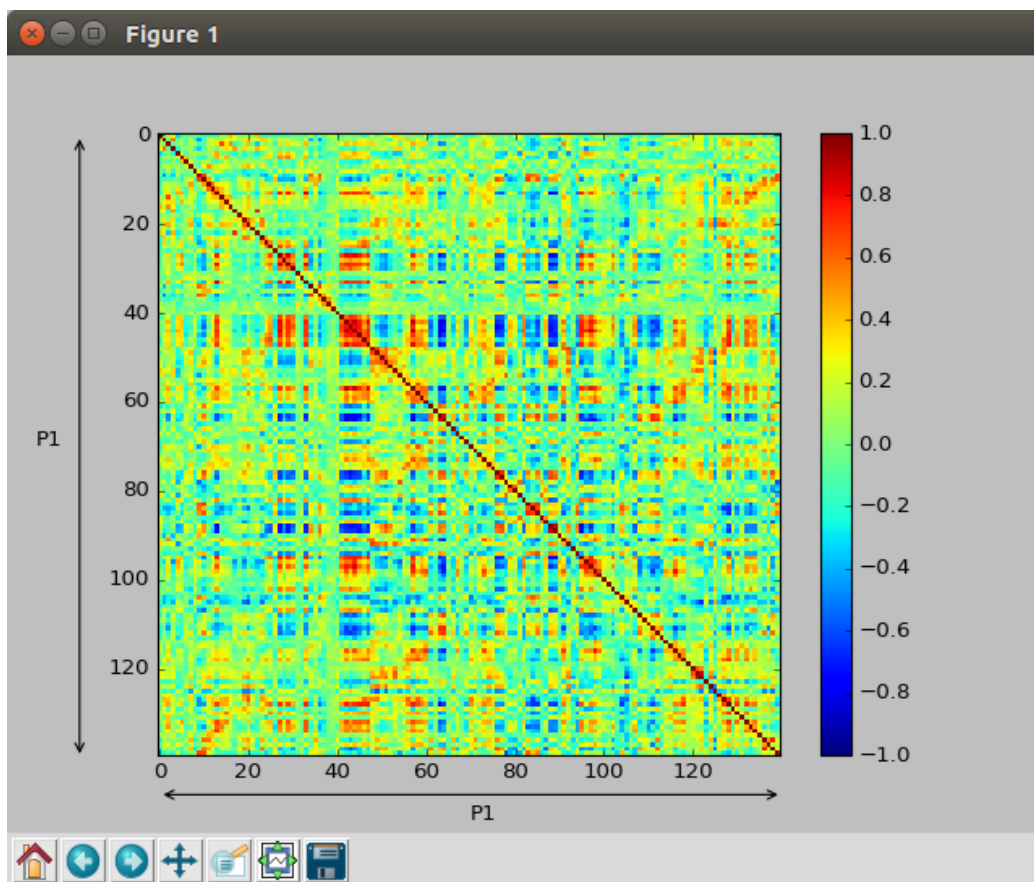


Figure 16: Pearson correlation window generated using RIP-MD. Buttons at the bottom of the window will leave you to select determined zones, modify the figure, restore it or save the image. The color bar at the right side show the color code for different Pearson values.

### 5.2.2 Using external software

If you wish to display RINs in a two dimensional way, or you want to perform some network analysis, you can use Cytoscape to do so. In subsection 5.1 we described the outputs generated by RIP-MD, so you can import into

Cytoscape a graph saved in the “Graph” folder. For more information about this software, please refer to the Cytoscape user manual.

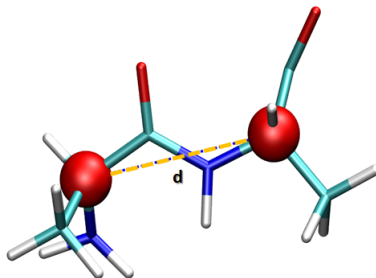


Figure 17: Contact of two  $C_{\alpha}$ s of two different residues. The  $C_{\alpha}$ s are represented as the red spheres and the dashed line represents the contact.

## A Appendix

### A.1 Definition of $C_{\alpha}$ contacts

Protein contact maps are described as a binary  $N \times N$  matrix (where  $N$  is the number of AAs or length of the protein). In this matrix, each position  $i, j$  is set to 1 if the distance between the  $C_{\alpha}$ s of residues  $i$  and  $j$  is  $\leq d$ , where  $d$  is a distance threshold (Fig. 17) [9, 11, 26]. In RIP-MD the default value of this distance threshold is 8Å.

### A.2 Definition of Hydrogen Bonds

Hydrogen Bonds (HBs) are identified by a geometric criteria: By default, a pair donor (d) – acceptor (a) is considered to be hydrogen bonded if their distance is less than 3Å and the  $\angle_{cba}$  angle is greater than 120°, with all  $\angle_{cba}$  angles classified as being between 0° and 180° (see Fig. 18.A) [22, 12].

### A.3 Definition of Salt Bridges

Salt bridges (SBs) are defined as electrostatic interactions formed between two heavy atoms of opposite charge, where a pair of heavy atoms are within a given distance threshold. In detail, SBs are treated as a contact between NH/NZ in ARG/LYS residues and OE\*/OD\* in ASP/GLU AAs, and the distance threshold is  $\leq 6$ Å between those atoms (see Fig. 18.B) [4, 7].

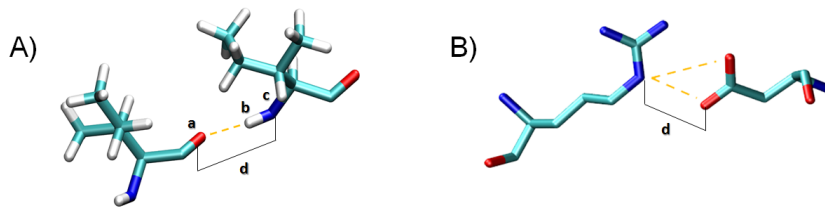


Figure 18: Examples of HBs and SBs. (A) HB defined by the distance  $d$  between the two heavy atoms and the angle formed by the electronegative atom ( $a$ ) and the hydrogen atom ( $b$ ) covalently bonded to the other electronegative atom ( $c$ ). (B) SB where  $d$  is the distance threshold that defines the interaction.

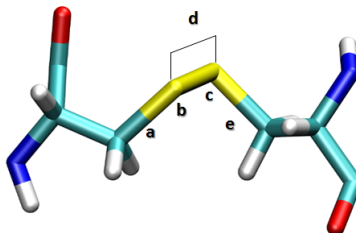


Figure 19: Example of a disulfide bridge between a pair of cysteines. The covalent bonds are defined by dihedral angles for the C-S-S-C atoms ( $abce$ ) between  $60^\circ$  and  $90^\circ$  and a distance between the two sulfur atoms ( $d$ )  $\leq 3\text{\AA}$ .

## A.4 Definition of Disulfide Bonds

Disulfide bonds (DBs) or disulfide bridges are covalent bonds formed between sulfur atoms of the thiol groups of two cysteine residues [6, 1, 25]. For static structures *i.e.* a PDB file, *RIP-MD* allows for the definition of DBs employing a geometric criteria: the distance between the sulfur atoms of two cysteines is  $\leq 3\text{\AA}$  and the dihedral angle  $\angle abce$  is between  $60^\circ$  and  $90^\circ$  (see Fig. 19). Regarding dynamics structures *i.e.* a MD trajectory, we do not provide such capability due to non-reactive nature of common biomolecular force-fields in where all covalent interactions need to be previously established [21, 5, 14].

## A.5 Definition of cation- $\pi$ and $\pi$ - $\pi$ interactions

The delocalized nature of  $\pi$ - $\pi$  bonds in aromatic systems leads to a higher electron density above and below the ring plane. The latter results in particu-



lar electrostatic interaction between  $\pi$  conjugated species and polar moieties, cations, anions or other aromatic rings [2]. Among these, cation- $\pi$  and  $\pi$ - $\pi$  are the most abundant and relevant in biological contexts [19]. It is important to mention that in proteins,  $\pi$ -systems are only found in aromatic residues (Phe, Tyr and Trp), while cations involved in this type of interaction belong to Lys and Arg AAs [8, 10].

Cation- $\pi$  interactions occur between a positively charged ion and the face of an electron-rich  $\pi$  system (see Fig. 20). Histidine residues are a special case in cation- $\pi$  interactions, as they can act both as a cation or as a  $\pi$ -system depending on their protonation state. In agreement with Liao *et al* [13], *RIP-MD* considers His residues as a cation if they present a protonated nitrogen atom, and as  $\pi$ -system only if they are not protonated. In this way, interactions are defined when an aromatic residue and a charged atom are within a distance threshold  $\leq 7\text{\AA}$ . Furthermore, the angle between the vectors formed by the cation and the center of the  $\pi$  system and the normal vector of this  $\pi$ -system must be between  $0^\circ$  and  $60^\circ$  or between  $120^\circ$  and  $180^\circ$  (see Fig. 20.A) [18].

$\pi$ - $\pi$  interactions occur between two aromatic rings or  $\pi$ -systems. In *RIP-MD* these are defined considering a distance between the geometric center of each aromatic ring ( $\leq 6\text{\AA}$ ) (see Fig. 21.A) [18]. *RIP-MD* also computes the orientation of each ring with respect to each other and classifies  $\pi$ - $\pi$  interactions accordingly, as shown in Fig. 21.B.

## A.6 Definition of arginine-arginine interactions

There are several computational studies that have demonstrated that the guanidine group of Arginines can resonate and stabilize an interaction between the side chain of two Args [24, 27]. This interaction between Args can form clusters and is often involved in protein-protein oligomerization, molecular recognition and ligand binding [20]. To detect this type of interaction, *RIP-MD* looks for pairs of Arg residues whose  $C_\zeta$ s are within a distance  $\leq 5\text{\AA}$  (see Fig. 22) [17, 20].

## A.7 Definition of Coulomb and van der Waals potential interactions

All previously described interactions are either van der Waals (vdW), electrostatics or combination of these last two. Indeed, from a first-principles

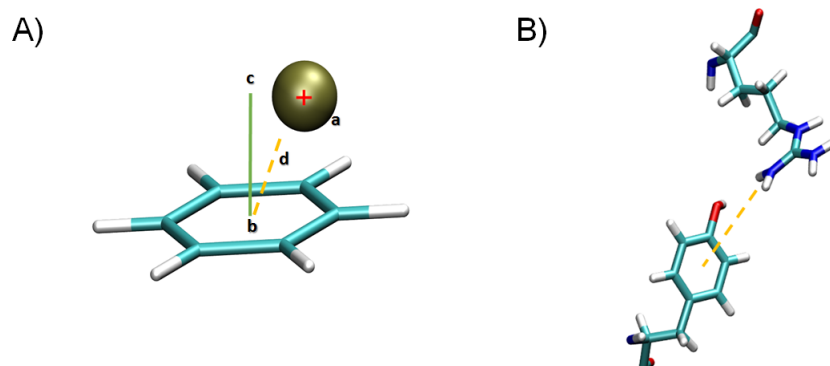


Figure 20: Cation- $\pi$  interactions. (A) Example of the interaction between a benzene ring and a cation. This interaction is defined by a distance threshold ( $d$ )  $\leq 7\text{\AA}$  and the  $\angle_{abc}$  between  $0^\circ$  and  $60^\circ$  or between  $120^\circ$  and  $180^\circ$ . (B) Example of the interaction between a Arginine acting as a cation, and a Tyrosine acting as the  $\pi$ -system.

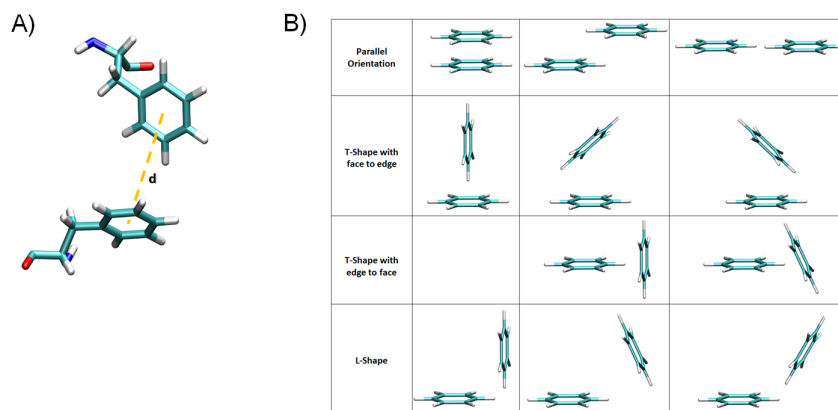


Figure 21: Description of  $\pi$ - $\pi$  interactions. (A) Example of the interaction between two Phe residues. This interaction exists if the distance between the centroids of the two  $\pi$ -systems ( $d$ ) is  $\leq 6\text{\AA}$ . (B) Definition of the possible orientations of the aromatic rings. These orientations are: Parallel orientation, T-shape with face to edge, T-shape with edge to face and L-shape.




Figure 22: Arginine-Arginine interactions. This interaction is detected when the distance ( $d$ ) between  $C_{\zeta}$ -  $C_{\zeta}$  is  $\leq 5\text{\AA}$

perspective, all interactions at the molecular level are Coulombic in nature. Thus, inspired by standard MD algorithms[23], *RIP-MD* includes procedures to compute vdW and Coulomb interactions, as it will be explained below.

In *RIP-MD*, vdW contacts are computed using a 12-6 Lennard-Jones potential ( $V_{LJ}$ ) described by Eq. 1.

$$V_{LJ} = \epsilon \left[ \left( \frac{\sigma}{r} \right)^{12} - 2 \left( \frac{\sigma}{r} \right)^6 \right] \quad (1)$$

where the distance between an atom pair is represented by  $r$ , while  $\sigma$  and  $\epsilon$  respectively are the zero energy distance and the depth of the potential well. These are specific for each atom type, being force-field dependent and are either obtained from when a single structure is provided or the corresponding parameter file if a MD trajectory is submitted to *RIP-MD*.

vdW contacts are defined as shown in Fig. 23. In this figure, atoms 1 and 4 can form a vdW interaction since they are separated by at least three covalent bonds and the distance between the spheres that represent their van der Waals radius ( $d$ ) is within  $-0.1\text{\AA}$  and  $3\text{\AA}$ .

To reduce the computational cost caused by the calculation of interactions between each pair of atoms, all coulombic interactions are computed employing a charged-group based cut-off using a 1-4 potential (see Figures 23 and 24) [23, 3, 15, 16]. Thus, interactions between pairs of fully or partially charged atoms pertaining two charged-groups, CG1 and CG2 and within a give cut-off are calculated via:

$$V_{Coulomb} = \frac{1}{4\pi\epsilon_0\epsilon_{cs}} \underbrace{\sum_{i \in CG_1} \sum_{j \in CG_2}}_{i, j \text{ not excluded, } j \text{ inside cut-off } i} \frac{q_i q_j}{|\vec{r}_{ij}|} \quad (2)$$

in which  $\epsilon_0$  and  $\epsilon_{CS}$  are the permittivity of vacuum and the simulated media, respectively. Usually,  $\epsilon_{CS}$  is set to 1 when simulating in explicit solvent conditions.  $\vec{r}_{ij}$  is the distance vector between particles  $i$  and  $j$ . In general MD simulations are run under periodic boundary conditions to avoid surface effects. The latter leads to spurious electrostatics as the  $\frac{1}{r}$  does not converge across the box copies. Several strategies exist to alleviate these artifacts, such as lattice sums and the Reaction Field (RF) method. The latter is quite computationally expensive, thus in *RIP-MD* a modified Coulomb potential using the RF formulation is employed. In detail, apart from the so called Coulombic term (see Eq. (2)) two extra terms that mimic the effects of the surrounding solvent are added.

$$V_{DD} = \frac{1}{4\pi\epsilon_0\epsilon_{cs}} \underbrace{\sum_{i \in CG_1} \sum_{j \in CG_2}}_{j \text{ inside cut-off } i} \frac{-q_i q_j C_{RF} \vec{r}_{ij}^2}{2R_{RF}^3} \quad (3)$$

and

$$V_{DI} = \frac{1}{4\pi\epsilon_0\epsilon_{cs}} \underbrace{\sum_{i \in CG_1} \sum_{j \in CG_2}}_{j \text{ inside cut-off } i} \frac{-q_i q_j (1 - 0.5C_{RF})}{R_{RF}} \quad (4)$$

with  $C_{RF}$  :

$$C_{RF} = \frac{(2\epsilon_{CS} - 2\epsilon_{RF})(1 + \kappa_{RF}R_{RF}) - \epsilon_{RF}(\kappa_{RF}R_{RF})^2}{(\epsilon_{CS} + 2\epsilon_{RF})(1 + \kappa_{RF}R_{RF}) + \epsilon_{RF}(\kappa_{RF}R_{RF})^2} \quad (5)$$

where  $\epsilon_{RF}$  is the RF permittivity, *i.e.* the permittivity of the solvent,  $\kappa_{RF}$  is the inverse Debye screening length, usually set to 0 for explicit solvent MD and  $R_{RF}$  is the RF cut-off. Eqs. (3) and (4) are known as the distance dependent and independent terms, respectively. Eq.(2) is not evaluated for excluded atoms (those connected by 4 or less atoms, *e.g.* a torsion angle), while Eqs. (3) and (4) are evaluated for these atoms, as well.




Figure 23: 1-4 Potential for Coulomb and VdW interactions. These interactions are computed if the interacting atoms (atoms 1 and 4) are separated at least by three covalent bonds. Also, the potentials are computed in a distance threshold  $d$ .




Figure 24: Example of residue charged groups. In this case Alanine is divided in three charged groups (colored circles) as defined by CHARMM topology file.

Given the long-range nature of Eqs. (2), (3) and (4), a raw RIN is rather impractical for visualization purposes. We have adopted two strategies to alleviate this issue: an interaction is considered only if it is above  $k_B T$ , where  $k_B$  is the Boltzmann constant and  $T$  is the temperature in kelvin; all interactions are consolidated at the residue level, in other words a node, *i.e.*, an AA, can have multiple edges *i.e.* an interaction, based on its constituent charge-groups (see Fig. 24).

## References

- [1] D. Alewood, K. Nielsen, P. F. Alewood, D. J. Craik, P. Andrews, M. Nerrie, S. White, T. Domagala, F. Walker, J. Rothacker, A. W. Burgess, and E. C. Nice. The role of disulfide bonds in the structure and function of murine epidermal growth factor (megf). *Growth Factors*, 23(2):97–110, 2005.
- [2] E. V. Anslyn and D. A. Dougherty. *Modern Physical Organic Chemistry*, volume 69. 2006.
- [3] R. B. Best, X. Zhu, J. Shim, P. E. M. Lopes, J. Mittal, M. Feig, and A. D. MacKerell. Optimization of the additive charmm all-atom protein force field targeting improved sampling of the backbone  $\phi$ ,  $\psi$  and side-chain  $\chi_1$  and  $\chi_2$  dihedral angles. *Journal of Chemical Theory and Computation*, 8(9):3257–3273, 2012. PMID: 23341755.
- [4] H. R. Bosshard, D. N. Marti, and I. Jelesarov. Protein stabilization by salt bridges: concepts, experimental approaches and clarification of some misunderstandings. *Journal of Molecular Recognition*, 17(1):1–16, 2004.
- [5] W. D. Cornell, P. Cieplak, C. I. Bayly, I. R. Gould, K. M. Merz, D. M. Ferguson, D. C. Spellmeyer, T. Fox, J. W. Caldwell, and P. A. Kollman. A second generation force field for the simulation of proteins, nucleic acids, and organic molecules. *Journal of the American Chemical Society*, 117(19):5179–5197, 1995.
- [6] A. A. Dombkowski, K. Z. Sultana, and D. B. Craig. Protein disulfide engineering. *{FEBS} Letters*, 588(2):206 – 212, 2014. Protein Engineering.
- [7] J. E. Donald, D. W. Kulp, and W. F. DeGrado. Salt bridges: Geometrically specific, designable interactions. *Proteins: Structure, Function, and Bioinformatics*, 79(3):898–915, 2011.
- [8] D. A. Dougherty. Cation– $\pi$  interactions involving aromatic amino acids. *The Journal of Nutrition*, 137(6):1504S–1508S, 2007.

- [9] J. Eargle and Z. Luthey-Schulten. NetworkView: 3D display and analysis of protein-RNA interaction networks. *Bioinformatics (Oxford, England)*, 28(22):3000–1, nov 2012.
- [10] J. P. Gallivan and D. A. Dougherty. Cation- $\pi$  interactions in structural biology. *Proceedings of the National Academy of Sciences*, 96(17):9459–9464, 1999.
- [11] J. Glasgow, T. Kuo, and J. Davies. Protein structure from contact maps: A case-based reasoning Approach. *Information Systems Frontiers*, 8(1):29–36, 2006.
- [12] P. A. Hunt, C. R. Ashworth, and R. P. Matthews. Hydrogen bonding in ionic liquids. *Chem. Soc. Rev.*, 44:1257–1288, 2015.
- [13] S.-M. Liao, Q.-S. Du, J.-Z. Meng, Z.-W. Pang, and R.-B. Huang. The multiple roles of histidine in protein interactions. *Chemistry Central Journal*, 7(1):1–12, 2013.
- [14] A. MacKerell, D. Bashford, M. Bellot, R. Dunbrack, J. Evanseck, M. Field, S. Fischer, J. Gao, H. Guo, S. Ha, D. Joseph-McCarthy, L. Kuchnir, K. Kuczera, F. Lau, C. Mattos, S. Michnick, T. Ngo, D. Nguyen, B. Prodhom, W. Reiher, B. Roux, M. Schlenkrich, J. Smith, R. Stote, J. Straub, M. Watanabe, J. Wiorkiewicz-Kuczera, D. Yin, and M. Karplus. All-Atom Empirical Potential for Molecular Modeling and Dynamics Studies of Proteins. *Journal of Physical Chemistry B*, 102(18):3586–3616, 1998.
- [15] A. D. MacKerell, D. Bashford, M. Bellott, R. L. Dunbrack, J. D. Evanseck, M. J. Field, S. Fischer, J. Gao, H. Guo, S. Ha, D. Joseph-McCarthy, L. Kuchnir, K. Kuczera, F. T. K. Lau, C. Mattos, S. Michnick, T. Ngo, D. T. Nguyen, B. Prodhom, W. E. Reiher, B. Roux, M. Schlenkrich, J. C. Smith, R. Stote, J. Straub, M. Watanabe, J. Wiórkiewicz-Kuczera, D. Yin, and M. Karplus. All-atom empirical potential for molecular modeling and dynamics studies of proteins. *The Journal of Physical Chemistry B*, 102(18):3586–3616, 1998. PMID: 24889800.
- [16] A. D. MacKerell, M. Feig, and C. L. Brooks. Improved treatment of the protein backbone in empirical force fields. *Journal of the American Chemical Society*, 126(3):698–699, 2004. PMID: 14733527.

- [17] A. Magalhaes, B. Maigret, J. Hoflack, J. N. F. Gomes, and H. A. Scheraga. Contribution of unusual arginine-arginine short-range interactions to stabilization and recognition in proteins. *Journal of Protein Chemistry*, 13(2):195–215, 1994.
- [18] A. J. M. Martin, M. Vidotto, F. Boscariol, T. Di Domenico, I. Walsh, and S. C. E. Tosatto. RING: networking interacting residues, evolutionary information and energetics in protein structures. *Bioinformatics (Oxford, England)*, 27(14):2003–5, July 2011.
- [19] E. A. Meyer, R. K. Castellano, and F. Diederich. Interactions with aromatic rings in chemical and biological recognition, 2003.
- [20] M. A. C. Neves, M. Yeager, and R. Abagyan. Unusual arginine formations in protein function and assembly: Rings, strings, and stacks. *The Journal of Physical Chemistry B*, 116(23):7006–7013, 2012. PMID: 22497303.
- [21] C. Oostenbrink, A. Villa, A. E. Mark, and W. F. van Gunsteren. A biomolecular force field based on the free enthalpy of hydration and solvation: the GROMOS force-field parameter sets 53A5 and 53A6. *Journal of computational chemistry*, 25(13):1656–76, Oct. 2004.
- [22] T. Steiner. The hydrogen bond in the solid state. *Angewandte Chemie International Edition*, 41(1):48–76, 2002.
- [23] W. van Gunsteren, P. Hünenberger, A. Mark, P. Smith, and I. Tironi. Computer simulation of protein motion. *Computer Physics Communications*, 91(1-3):305–319, Sept. 1995.
- [24] J. Vondrášek, P. E. Mason, J. Heyda, K. D. Collins, and P. Jungwirth. The molecular origin of like-charge arginine-arginine pairing in water. *The Journal of Physical Chemistry B*, 113(27):9041–9045, 2009. PMID: 19354258.
- [25] J. Wang, H. Ma, X. Ge, J. Zhang, K. Teng, Z. Sun, and J. Zhong. Bovicin hj50-like lantibiotics, a novel subgroup of lantibiotics featured by an indispensable disulfide bridge. *PLoS ONE*, 9(5):1–11, 05 2014.



- [26] Z. Wang and J. Xu. Predicting protein contact map using evolutionary and physical constraints by integer programming. *Bioinformatics*, 29(13):266–273, 2013.
- [27] M. L. Williams and J. E. Gready. Guanidinium-type resonance stabilization and its biological implications. i. the guanidine and extended-guanidine series. *Journal of Computational Chemistry*, 10(1):35–54, 1989.