

Lab 01 – MATH 240 – Computational Statistics

Sankalp Ojha
Colgate University
Mathematics
sojha@colgate.edu

Abstract

This document provides a basic template for the 2-page labs we will complete each week. Here, you should provide a succinct summary about what you did and why it might be helpful.

Keywords: What topics does the lab cover with respect to class?

1 Instructions

For this lab, you will

1. Install **R** and **RStudio**
2. Install tinytex (if necessary):
`install.packages("tinytex")`
3. Create a GitHub account [here](#), and email me your username.
4. Install **GitHub desktop**.
5. Accept the LAB 1 assignment [here](#).
6. Recreate this document (except put your name/info at the top) to get used to writing in L^AT_EX and to see the types of things we can do when creating a document to convey statistical information. Make sure to commit and push your work using GitHub desktop as you finish each section.

Remark: You will find the class Sweave cheatsheet to be *incredibly* `\emph{incredibly}` helpful.

2 Word Processing Tasks

2.1 Centering Text

We can center text in Sweave.

2.2 Bold, Italics, and Underlining

We can **bold**, *italicize*, underline, and *emphasize* text in Sweave.

Note, I did a column break here so that the list wasn't broken across columns.

2.3 Lists, and Numbered Lists

We can write an unordered list in Sweave.

- first item
- second item
- third item

We can write a numbered list in Sweave.

1. first item
2. second item
3. third item

We can write a lettered list in Sweave.

- a. first item
- b. second item
- c. third item

2.4 Submissions

This part of the midterm is due Sunday November 14 by 5p. I will not accept late submissions. Note that you may use this template to help build your introduction and methods sections, and you can use the work you did as a group during the datathon. Still, I expect this submission to be your own summary and extension of that work without collaboration.

2.5 Typing Mathematical Equations

We can write a one line equation that is centered like this

$$\hat{y}_i = \beta_0 + \beta_1 x_{1i} + \beta_2 x_{2i} + \beta_3 x_{2i} + \epsilon_i.$$

This can be written in the text, as $\hat{y}_i = \beta_0 + \beta_1 x_{1i} + \beta_2 x_{2i} + \beta_3 x_{2i} + \epsilon_i$ using as well.

When we need to show multiple steps, we can create a multi-line equation that is centered like this:

$$\begin{aligned} 8(x-5) + x &= 9(x-5) + 5 \\ 8x - 40 + x &= 9x - 45 + 5 && \text{(Distributing)} \\ 9x - 40 &= 9x - 40 && \text{(Combining like terms)} \\ 9x &= 9x && \text{(Adding 40 to both sides)} \\ x &= x && \text{(Dividing both sides by 9)} \end{aligned}$$

The equality holds for any x.

Note, I did a page break here so that the next section started on a clean page.

2.6 Running R Code

Code chunks can be entered into Sweave; e.g., here are some comments.

```
# R code goes here
# Output is automatically printed in the pdf
```

Below, you can see that we can do algebra with R.

```
8*(9-5) + 9 # 8*(x-5)+x for x=9

## [1] 41
```

Below, we show we can produce the code without evaluating it.

```
8*(9-5) + 9 # 8*(x-5)+x for x=9
```

Alternatively, we can produce the output without the code.

```
## [1] 41
```

We can also call object values from R directly.

```
result <- 8*(9-5) + 9 # 8*(x-5)+x for x=9
result.with.error <- result + rnorm(1, mean = 0, sd = 0.1)
result.with.error

## [1] 41.10707
```

The result is 41.10707. Note that I did not type the result, but I used the `\Sexpr{}` command.

2.7 Plotting

```
#Plot a histogram of random normally distributed data
hist(rexp(100))
```

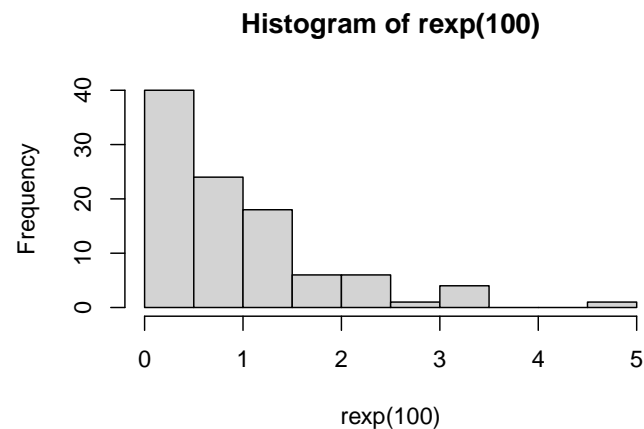


Figure 1: A histogram of random normally distributed data, $n = 100$.

2.8 Tables

Below, we load and take a peek at some data about the death rates per 1000 in Virginia in 1940.

```
data(VADeaths)
head(VADeaths) # Take a peek of the data
```

```
##      Rural Male Rural Female Urban Male Urban Female
## 50-54      11.7       8.7      15.4       8.4
## 55-59      18.1      11.7      24.3      13.6
## 60-64      26.9      20.3      37.0      19.3
## 65-69      41.0      30.9      54.6      35.1
## 70-74      66.0      54.3      71.1      50.0
```

If we want to print this nicely, we can do so using the `xtable` package, which we can reference using the label (Table).

```
library(xtable)
sleep.table<-xtable(VADeaths,
                    label = "VADeaths.tab",
                    caption = "Death Rates per 1000 in Virginia (1940).")
```

Rural Male	Rural Female	Urban Male	Urban Female
11.70	8.70	15.40	8.40
18.10	11.70	24.30	13.60
26.90	20.30	37.00	19.30
41.00	30.90	54.60	35.10
66.00	54.30	71.10	50.00

Table 1: Death Rates per 1000 in Virginia (1940).

References: Note that when you add citations to your `bib.bib` file *and* you cite them in your document, the bibliography section will automatically populate here.

3 Appendix

If you have anything extra, you can add it here in the appendix. This can include images or tables that don't work well in the two-page setup, code snippets you might want to share, etc.