


## Lab Three – Matrices and Data Frames in R

- Complete the tasks below. Make sure to start your solutions in on a new line that starts with “**Solution:**”.
- Make sure to use the Quarto Cheatsheet. This will make completing and writing up the lab *much* easier.

Consider the unit square depicted in Figure 1.

```
1 p0 <- c(0, 0)
2 p1 <- c(1, 0)
3 p2 <- c(1, 1)
4 p3 <- c(0, 1)
5 ggplot() +
6   geom_segment(aes(x = p0[1], y = p0[2], xend = p1[1], yend = p1[2])) +
7   geom_segment(aes(x = p1[1], y = p1[2], xend = p2[1], yend = p2[2])) +
8   geom_segment(aes(x = p2[1], y = p2[2], xend = p3[1], yend = p3[2])) +
9   geom_segment(aes(x = p3[1], y = p3[2], xend = p0[1], yend = p0[2])) +
10  theme_bw() +
11  xlim(-0.5, 1.5) +
12  ylim(-0.5, 1.5) +
13  labs(x = "x", y = "y")
```

Figure 1: The unit square.

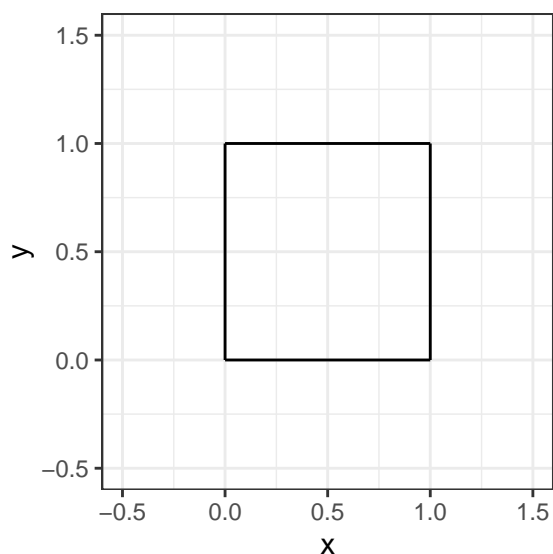

The unit square can be defined by two basis vectors

$$\mathbf{v}_1 = \begin{bmatrix} 1 \\ 0 \end{bmatrix} \quad \text{and} \quad \mathbf{v}_2 = \begin{bmatrix} 0 \\ 1 \end{bmatrix}.$$

From these vectors, we can compute the corner vertices.

$p_0 = (0, 0) = (x_0, y_0)$	(The origin)
$p_1 = v_1 = (x_1, y_1) = (1, 0)$	(The first basis vector)
$p_2 = v_1 + v_2 = (x_2, y_2) = (1, 1)$	(The sum of basis vectors)
$p_3 = v_2 = (x_3, y_3) = (0, 1)$	(The second basis vector)

Note that the segments that form the boundary go from  $p_0$  to  $p_1$  to  $p_2$  to  $p_3$  and back to  $p_0$ .

Consider the matrix  $M$  to be the matrix we get from binding the two basis vectors at the column,

$$\mathbf{M} = \begin{bmatrix} 1 & 0 \\ 0 & 1 \end{bmatrix}.$$

## 1 Question 1

Let's transform  $\mathbf{M}$  to demonstrate an interesting linear algebra property.

### 1.1 Part a

Create the matrix  $\mathbf{A}$  in R.

$$\mathbf{A} = \begin{bmatrix} 1 & -7 \\ 5 & 9 \end{bmatrix}$$

**Solution**

```
1 A <- matrix(c(1, 5, -7, 9), nrow = 2, ncol = 2)
```

### 1.2 Part b

Compute the product below in R and store it in an object  $\mathbf{T}$ .

$$\mathbf{T} = \mathbf{A}\mathbf{M}.$$

**Solution**

```
1 M <- matrix(c(1, 0, 0, 1), nrow = 2, ncol = 2)
2 T <- A %*% M
```

### 1.3 Part c

Create `basis.vector.1` (first column of  $\mathbf{T}$ ) and `basis.vector.2` (second column of  $\mathbf{T}$ ) in R.

**Solution**

```
1 basis.vector.1 <- T[, 1]
2 basis.vector.2 <- T[, 2]
```

### 1.4 Part d

Compute the points  $p_0$ ,  $p_1$ ,  $p_2$ , and  $p_3$ .

**Solution**

```
1 p0 <- c(0, 0)
2 p1 <- basis.vector.1
3 p2 <- basis.vector.1 + basis.vector.2
4 p3 <- basis.vector.2
```

### 1.5 Part e

Copy and paste the code for the unit square. Edit the code to draw the segments that form the boundary based on the points in Part d.


**Solution**

```

1 ggplot() +
2   geom_segment(aes(x = p0[1], y = p0[2], xend = p1[1], yend = p1[2])) +
3   geom_segment(aes(x = p1[1], y = p1[2], xend = p2[1], yend = p2[2])) +
4   geom_segment(aes(x = p2[1], y = p2[2], xend = p3[1], yend = p3[2])) +
5   geom_segment(aes(x = p3[1], y = p3[2], xend = p0[1], yend = p0[2])) +
6   theme_bw() +
7   xlim(-15, 15) +
8   ylim(-5, 25) +
9   labs(x = "x", y = "y")

```

Figure 2: Transformed unit square for Question 1.

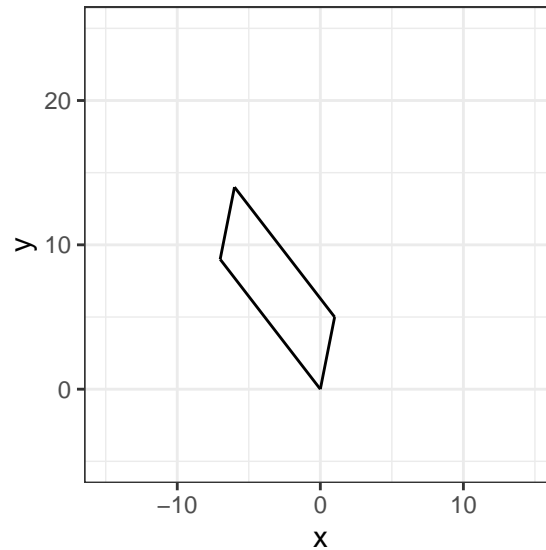

## 1.6 Part f

Interestingly, the determinant of  $\mathbf{A}$  gives us the area of the shape plotted in Part e. Find the determinant of  $\mathbf{A}$ .

**Solution**

```

1 A # From Part a: [[1,-7],[5,9]]

```

```

      [,1] [,2]
[1,]     1  -7
[2,]     5   9

```

```

1 det_A <- det(A)
2 det_A

```

```

[1] 44

```

## 2 Question 2

Recomplete Question 1 using a new matrix for  $\mathbf{A}$ . This matrix is not as well behaved.

### 2.1 Part a

Create the matrix  $\mathbf{A}$  in R.

$$\mathbf{A} = \begin{bmatrix} 1 & 2 \\ 2 & 4 \end{bmatrix}$$

### Solution

```
1 A <- matrix(c(1, 2, 2, 4), nrow = 2, ncol = 2, byrow = TRUE)
2 A
```

```
      [,1] [,2]
[1,]     1     2
[2,]     2     4
```

## 2.2 Part b

Compute the product below in R and store it in an object T.

$$\mathbf{T} = \mathbf{A}\mathbf{M}.$$

### Solution

```
1 M <- rbind(c(1,0), c(0,1)) # Identity matrix
2 T <- A %*% M
3 T
```

```
      [,1] [,2]
[1,]     1     2
[2,]     2     4
```

## 2.3 Part c

Create `basis.vector.1` (first column of T) and `basis.vector.2` (second column of T) in R.

### Solution

```
1 basis.vector.1 <- T[,1]
2 basis.vector.2 <- T[,2]
3 basis.vector.1
```

```
[1] 1 2
```

```
1 basis.vector.2
```

```
[1] 2 4
```

## 2.4 Part d

Compute the points  $p_0$ ,  $p_1$ ,  $p_2$ , and  $p_3$ .

### Solution

```
1 p0 <- c(0,0)
2 p1 <- basis.vector.1
3 p2 <- basis.vector.1 + basis.vector.2
4 p3 <- basis.vector.2
5 p1; p2; p3
```

```
[1] 1 2
```

```
[1] 3 6
```

```
[1] 2 4
```

## 2.5 Part e


Copy and paste the code for plotting the unit square. Edit the code to draw the segments that form the boundary based on the points in Part d.

**Note:** As you continue to plot this here and through question 2, you will find that the  $x$  and  $y$  limits need to change. Try `xlim(-15,15)` and `ylim(-5, 25)`.

### Solution

```
1 ggplot() +
2   geom_segment(aes(x = p0[1], y = p0[2], xend = p1[1], yend = p1[2])) +
3   geom_segment(aes(x = p1[1], y = p1[2], xend = p2[1], yend = p2[2])) +
4   geom_segment(aes(x = p2[1], y = p2[2], xend = p3[1], yend = p3[2])) +
5   geom_segment(aes(x = p3[1], y = p3[2], xend = p0[1], yend = p0[2])) +
6   theme_bw() +
7   xlim(-15,15) +
8   ylim(-5,25) +
9   labs(x = "x", y = "y")
```

Figure 3: Degenerate transform (line segment).

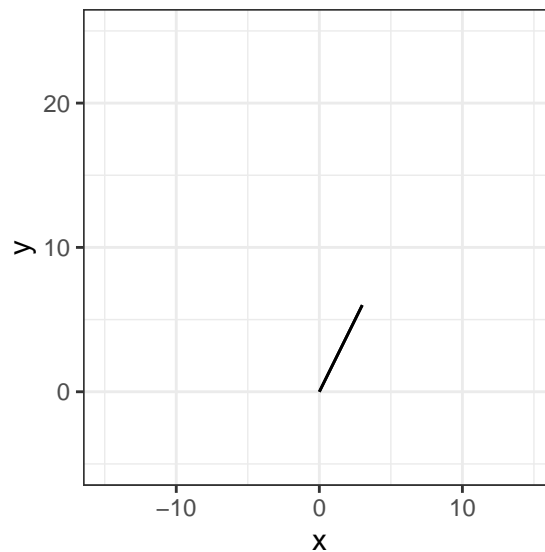

## 2.6 Part f

Interestingly, the determinant of  $\mathbf{A}$  gives us the area of the shape plotted in Part e. Find the determinant of  $\mathbf{A}$ .

### Solution

```
1 det(A)
```

```
[1] 0
```

## 3 Question 3

We can conduct a shear transformation that keeps the area of the shape the same but horizontally or vertically slants the object.

In fact, this is one of the ways artists can make something look like it's leaning or being pushed. Other applications where this is useful include fluid dynamics and crystallography, where the area of a deformed object must remain constant, or in photography where perspective in photos can be adjusted.

A shear transformation is implemented by altering the basis vectors we start with. For vertical slanting,

$$\mathbf{M}_v = \begin{bmatrix} 1 & k \\ 0 & 1 \end{bmatrix}$$

and for horizontal slanting

$$\mathbf{M}_h = \begin{bmatrix} 1 & 0 \\ k & 1 \end{bmatrix}.$$

In both cases,  $k \in \mathbb{R}$  is called a shear factor and its sign determines the direction of the slant and its magnitude determines the severity of the slant.

### 3.1 Part a

Use the following to generate a new shape. Compare the shape and its area to your answer in Question 1.


$$\mathbf{M}_v = \begin{bmatrix} 1 & k = 0.5 \\ 0 & 1 \end{bmatrix} \quad \text{and} \quad \mathbf{A} = \begin{bmatrix} 1 & -7 \\ 5 & 9 \end{bmatrix}$$

#### Solution

```
1 k <- 0.5
2 Mv <- matrix(c(1, k, 0, 1), nrow=2, byrow=TRUE)
3 T_v <- A %*% Mv
4 basis.vector.1_v <- T_v[,1]
5 basis.vector.2_v <- T_v[,2]
6 p0 <- c(0,0); p1_v <- basis.vector.1_v; p2_v <- basis.vector.1_v + basis.vector.2_v; p3_v <- basis.vector.2
7 det(Mv)
```

[1] 1

```
1 #| label: fig-q3a
2 #| fig-cap: "Vertical shear."
3 #| fig-width: 3.5
4 #| fig-height: 3.5
5 #| scale: 0.8
6 #| fig-align: center
7 ggplot() +
8   geom_segment(aes(x=p0[1],y=p0[2],xend=p1_v[1],yend=p1_v[2])) +
9   geom_segment(aes(x=p1_v[1],y=p1_v[2],xend=p2_v[1],yend=p2_v[2])) +
10  geom_segment(aes(x=p2_v[1],y=p2_v[2],xend=p3_v[1],yend=p3_v[2])) +
11  geom_segment(aes(x=p3_v[1],y=p3_v[2],xend=p0[1],yend=p0[2])) +
12  theme_bw() + xlim(-15,15) + ylim(-5,25) + labs(x="x",y="y")
```

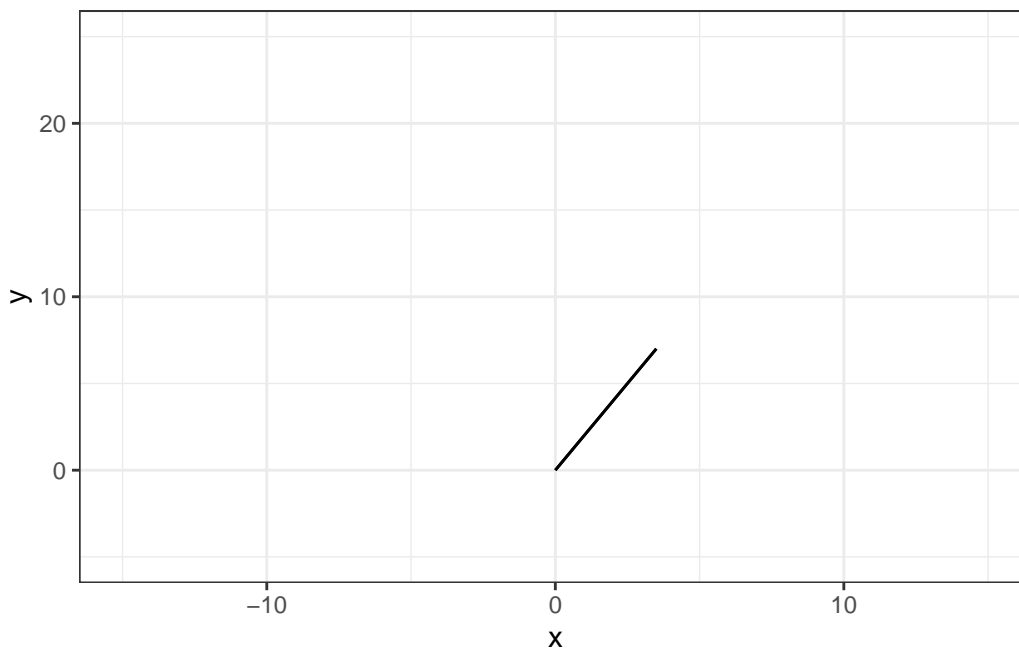

### 3.2 Part b

Use the following to generate a new shape. Compare the shape and its area to your answer in Questions 1 and the vertical shear transform in part (a).


$$\mathbf{M}_h = \begin{bmatrix} 1 & 0 \\ k=0.5 & 1 \end{bmatrix} \quad \text{and} \quad \mathbf{A} = \begin{bmatrix} 1 & -7 \\ 5 & 9 \end{bmatrix}$$

#### Solution

```
1 Mh <- matrix(c(1, 0, k, 1), nrow=2, byrow=TRUE)
2 T_h <- A %*% Mh
3 basis.vector.1_h <- T_h[,1]
4 basis.vector.2_h <- T_h[,2]
5 p1_h <- basis.vector.1_h; p2_h <- basis.vector.1_h + basis.vector.2_h; p3_h <- basis.vector.2_h
6 det(Mh)
```

[1] 1

```
1 #| label: fig-q3b
2 #| fig-cap: "Horizontal shear."
3 #| fig-width: 3.5
4 #| fig-height: 3.5
5 #| scale: 0.8
6 #| fig-align: center
7 ggplot() +
8   geom_segment(aes(x=p0[1],y=p0[2],xend=p1_h[1],yend=p1_h[2])) +
9   geom_segment(aes(x=p1_h[1],y=p1_h[2],xend=p2_h[1],yend=p2_h[2])) +
10  geom_segment(aes(x=p2_h[1],y=p2_h[2],xend=p3_h[1],yend=p3_h[2])) +
11  geom_segment(aes(x=p3_h[1],y=p3_h[2],xend=p0[1],yend=p0[2])) +
12  theme_bw() + xlim(-15,15) + ylim(-5,25) + labs(x="x",y="y")
```

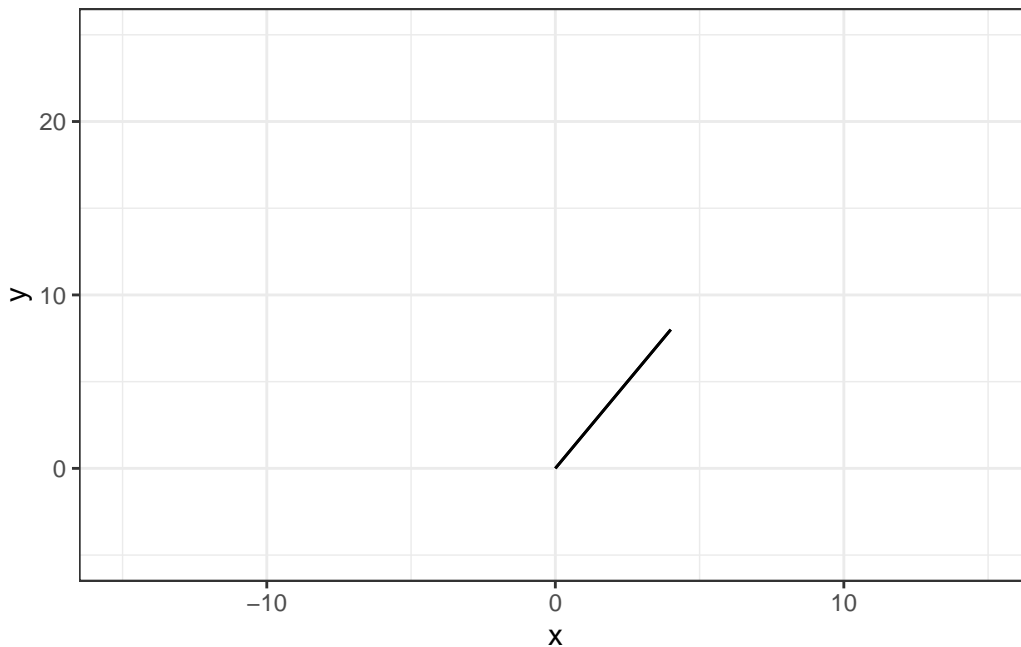

### 3.3 Part c

Can we shear vertically and horizontally at the same time? Use the following to generate a new shape. Compare the shape and its area to your answers in parts (a) and (b).


$$\mathbf{M}_{vh} = \begin{bmatrix} 1 & k = 0.5 \\ k = 0.5 & 1 \end{bmatrix} \quad \text{and} \quad \mathbf{A} = \begin{bmatrix} 1 & -7 \\ 5 & 9 \end{bmatrix}$$

#### Solution

```
1 Mvh <- matrix(c(1, k, k, 1), nrow=2, byrow=TRUE)
2 T_vh <- A %*% Mvh
3 basis.vector.1_vh <- T_vh[,1]
4 basis.vector.2_vh <- T_vh[,2]
5 p1_vh <- basis.vector.1_vh; p2_vh <- basis.vector.1_vh + basis.vector.2_vh; p3_vh <- basis.vector.2_vh
6 det(Mvh)
```

[1] 0.75

```
1 #| label: fig-q3c
2 #| fig-cap: "Vertical + horizontal shear."
3 #| fig-width: 3.5
4 #| fig-height: 3.5
5 #| scale: 0.8
6 #| fig-align: center
7 ggplot() +
8   geom_segment(aes(x=p0[1],y=p0[2],xend=p1_vh[1],yend=p1_vh[2])) +
9   geom_segment(aes(x=p1_vh[1],y=p1_vh[2],xend=p2_vh[1],yend=p2_vh[2])) +
10  geom_segment(aes(x=p2_vh[1],y=p2_vh[2],xend=p3_vh[1],yend=p3_vh[2])) +
11  geom_segment(aes(x=p3_vh[1],y=p3_vh[2],xend=p0[1],yend=p0[2])) +
12  theme_bw() + xlim(-15,15) + ylim(-5,25) + labs(x="x",y="y")
```

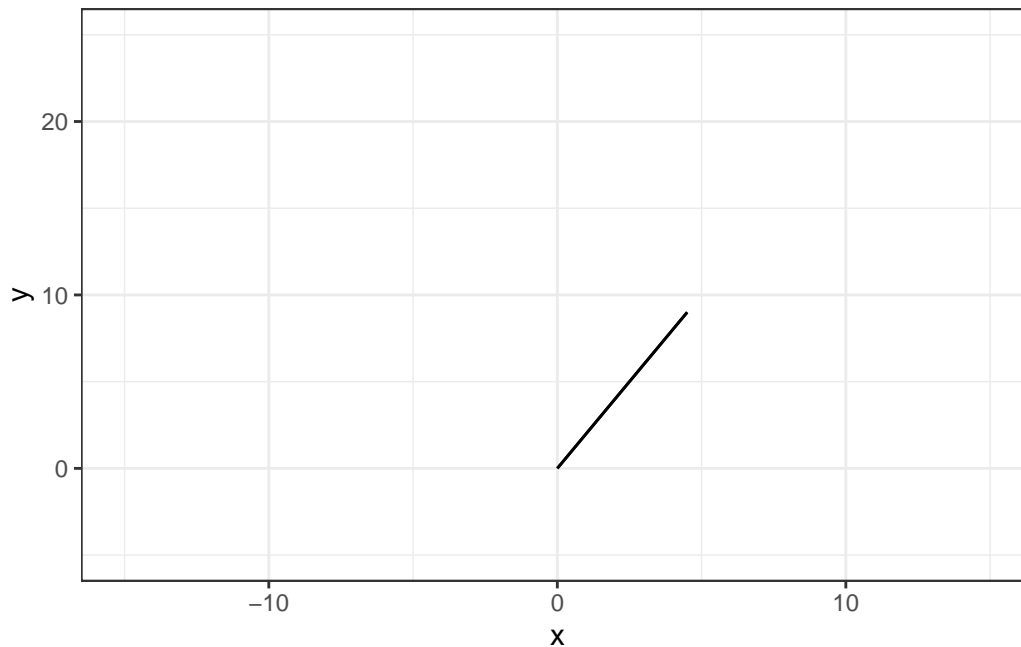



## 4 Question 4

### 4.1 Part a

Create a data frame `ladder` with the following data. Note your data frame should have three columns; I split it to save vertical space here.

x	y	group	x	y	group
0	0	1	1	8	6
0	20	1	0	10	7
1	0	2	1	10	7
1	20	2	0	12	8
0	2	3	1	12	8
1	2	3	0	14	9
0	4	4	1	14	9
1	4	4	0	16	10
0	6	5	1	16	10
1	6	5	0	18	11
0	8	6	1	18	11

### Solution

```
1 ladder <- data.frame(  
2   x = c(0,0,1,1,0,1,0,1,0,1,0,1,1,0,1,0,1,0,1,0),  
3   y = c(0,20,0,20,2,2,4,4,6,6,8,8,8,10,10,10,12,12,14,14,16,16),  
4   group = c(1,1,2,2,3,3,4,4,5,5,6,6,6,7,7,7,7,8,8,9,9,10,10)  
5 )  
6 # Add final row from table  
7 ladder <- rbind(ladder, data.frame(x=1, y=18, group=11))  
8 ladder
```


```
   x y group  
1  0 0     1  
2  0 20    1  
3  1 0     2  
4  1 20    2  
5  0 2     3  
6  1 2     3  
7  0 4     4  
8  1 4     4  
9  0 6     5  
10 1 6     5  
11 0 8     6  
12 1 8     6  
13 1 8     6  
14 0 10    7  
15 1 10    7  
16 0 10    7  
17 1 12    8  
18 0 12    8  
19 1 14    9  
20 0 14    9  
21 1 16   10  
22 0 16   10  
23 1 18   11
```

## 4.2 Part b

Remove `#|eval: false` in the code below. The result should look like a ladder and a very rectangular house if part a is correct.


```
1 ggplot() +
2   geom_path(data = ladder, aes(x = x, y = y, group = group)) +
3   geom_segment(aes(x = 10, xend = 10, y = 0, yend = 20)) +
4   geom_segment(aes(x = 10, xend = 20, y = 20, yend = 20)) +
5   geom_segment(aes(x = 20, xend = 20, y = 0, yend = 20)) +
6   geom_segment(aes(x = 10, xend = 20, y = 0, yend = 0)) +
7   theme_bw() + xlim(-2,22) + ylim(-2,22)
```

Figure 4: Ladder and house.

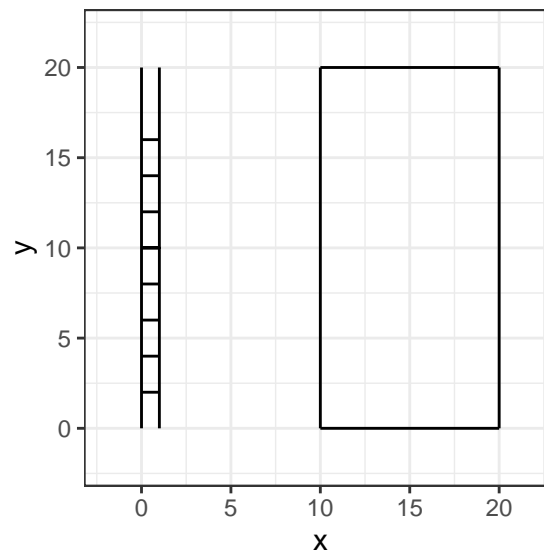

### Solution

```
1 #| label: fig-ladder
2 #| fig-cap: "A ladder."
3 #| fig-width: 3
4 #| fig-height: 3
5 #| scale: "80%"
6 #| fig-align: "center"
7 #| size: "scriptsize"
8 ggplot() +
9   geom_path(data = ladder,
10             aes(x = x, y = y, group = group)) +
11     geom_segment(aes(x = 10, xend = 10,
12                      y=0, yend = 20))+
13   geom_segment(aes(x = 10, xend = 20,
14                      y=20, yend = 20))+
15   geom_segment(aes(x = 20, xend = 20,
16                      y=0, yend = 20))+
17   geom_segment(aes(x = 10, xend = 20,
18                      y=0, yend = 0)) +
19   theme_bw() +
20   xlim(-2,22) +
21   ylim(-2,22)
```

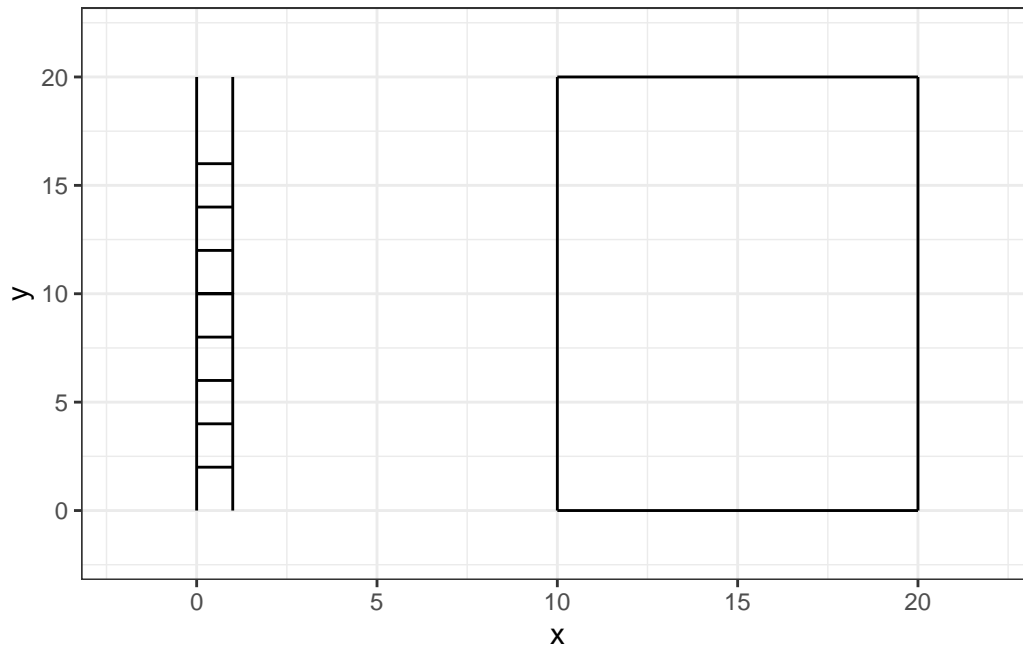

### 4.3 Part c

Use `as.matrix()` to create a  $22 \times 2$  matrix **A** containing the **x** and **y** observations from the `ladder` data frame. Use matrix multiplication to compute

$$\mathbf{T} = \mathbf{A}\mathbf{M}_h.$$

Recall,

$$\mathbf{M}_h = \begin{bmatrix} 1 & 0 \\ k & 1 \end{bmatrix}$$

and use  $k = 0.5$ .

#### Solution

```
1 # Ladder data frame from Part a (22 obs x 3 cols) [file:4]
2 ladder <- data.frame(
3   x = c(0, 0, 1, 1, 0, 1, 0, 1, 0, 1, 0, 1, 1, 0, 1, 0, 1, 0, 1, 0),
4   y = c(0,20, 0,20, 2, 2, 4, 4, 6, 6, 8, 8, 8,10,10,10,12,12,14,14,16,16),
5   group = c(1,1,2,2,3,3,4,4,5,5,6,6,6,7,7,7,8,8,9,9,10,10)
6 ) # Matches table pattern; add last row separately if needed
7
8 A <- as.matrix(ladder[, c("x", "y")]) # 22 x 2 matrix
9 dim(A)

[1] 22 2

1 k <- 0.5
2 Mh <- matrix(c(1, 0, k, 1), nrow=2, byrow=TRUE)
3 T <- A %*% Mh
```

### 4.4 Part d

Create a data frame `leaning.ladder` with the **x** and **y** equal to the first and second column of **T**, respectively, and the same values of **group** from `ladder`.

#### Solution

```
1 leaning.ladder <- data.frame(
2   x = T[,1],
```

```

3   y = T[,2],
4   group = ladder$group
5 )
6 head(leaning.ladder)

```

```

      x  y group
1    0  0     1
2   10 20     1
3    1  0     2
4   11 20     2
5    1  2     3
6    2  2     3

```

## 4.5 Part e

Remove `eval: false` in the code below. The result should look like a ladder and a very rectangular house if part a is correct. The new leaning ladder should look like it is leaning on the house.

```

1 ggplot() +
2   geom_path(data = ladder,
3     aes(x = x, y = y, group = group, color = "Starting Ladder")) +
4   geom_path(data = leaning.ladder,
5     aes(x = x, y = y, group = group, color = "Leaning Ladder")) +
6   geom_segment(aes(x = 10, xend = 10,
7     y=0, yend = 20))+
8   geom_segment(aes(x = 10, xend = 20,
9     y=20, yend = 20))+
10  geom_segment(aes(x = 20, xend = 20,
11    y=0, yend = 20))+
12  geom_segment(aes(x = 10, xend = 20,
13    y=0, yend = 0)) +
14  theme_bw() +
15  xlim(-2,22) +
16  ylim(-2,22) +
17  scale_color_manual("", values=c("darkred", "grey"))

```

### Solution

```

1 ggplot() +
2   geom_path(data = ladder, aes(x = x, y = y, group = group, color = "Starting Ladder")) +
3   geom_path(data = leaning.ladder, aes(x = x, y = y, group = group, color = "Leaning Ladder")) +
4   geom_segment(aes(x = 10, xend = 10, y = 0, yend = 20)) +
5   geom_segment(aes(x = 10, xend = 20, y = 20, yend = 20)) +
6   geom_segment(aes(x = 20, xend = 20, y = 0, yend = 20)) +
7   geom_segment(aes(x = 10, xend = 20, y = 0, yend = 0)) +
8   theme_bw() + xlim(-2,22) + ylim(-2,22) +
9   scale_color_manual("", values = c("darkred", "grey"))

```

Figure 5: Ladder and leaning ladder.

