
Adding key:


Key:

Attempt	Input	Expected	Actual	P/F
1	blank	Invalid input	Invalid input	P
2	status	Add key	Add key	P

Attempt 1 screen shot

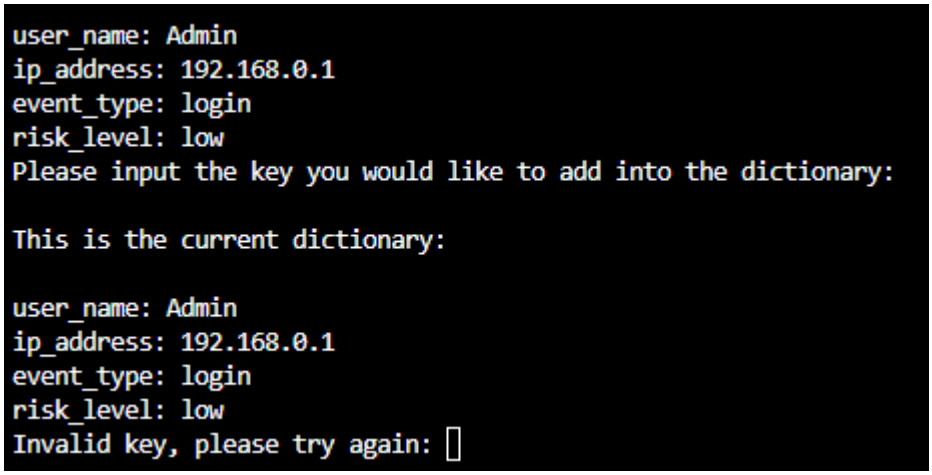

Attempt 2 screen shot

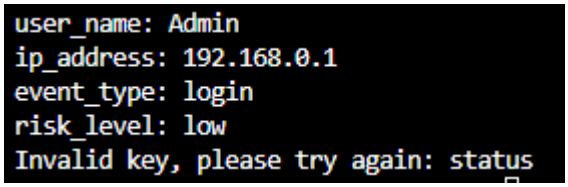

Value:

Attempt	Input	Expected	Actual	P/F
1				
2				

Attempt 1 screen shot:

```
user_name: Admin
ip_address: 192.168.0.1
event_type: login
risk_level: low
Invalid key, please try again: status
Please input the value for status:

This is the current dictionary:

user_name: Admin
ip_address: 192.168.0.1
event_type: login
risk_level: low
Invalid value, please try again for status: running
```

Attempt 2 screen shot:

```
user_name: Admin
ip_address: 192.168.0.1
event_type: login
risk_level: low
Invalid value, please try again for status: running



This is the current dictionary:

user_name: Admin
ip_address: 192.168.0.1
event_type: login
risk_level: low
status: running
Please input the key you would like to change from the dictionary:
```

Change value from key:

Choosing the key:

Attempt	Input	Expected	Actual	P/F
1	risk	Key not found	Key not found	P
2	Blank	Invalid input	Invalid input	P
3	risk_level	Key found	Key found	P

Attempt 1 screen shot:

```
user_name: Admin
ip_address: 192.168.0.1
event_type: login
risk_level: low
status: running
Please input the key you would like to change from the dictionary: risk

This is the current dictionary:
```

Attempt 2 screen shot:

```
user_name: Admin
ip_address: 192.168.0.1
event_type: login
risk_level: low
status: running
Invalid key, please try again:

This is the current dictionary:

user_name: Admin
ip_address: 192.168.0.1
event_type: login
risk_level: low
status: running
Invalid key, please try again: risk_level
Please input the value for risk_level:
```

Attempt 3 screen shot:

```
user_name: Admin
ip_address: 192.168.0.1
event_type: login
risk_level: low
status: running
Invalid key, please try again: risk_level
Please input the value for risk_level:
```

Changing the key:

Attempt	Input	Expected	Real	P/F
1	blank	Invalid input	Invalid input	P
2	High	Changed value	Change valu	P

Attempt 1 screenshot:

```
Please input the value for risk_level:

This is the current dictionary:

user_name: Admin
ip_address: 192.168.0.1
event_type: login
risk_level: low
status: running
Invalid value, please try again for risk_level:
```

Attempt 2 screenshot:

```
Invalid value, please try again for risk_level: High




This is the current dictionary:

user_name: Admin
ip_address: 192.168.0.1
event_type: login
risk_level: High
```


Deleting key from dictionary:

Attempt	Input	Expected	Actual	P/F
1	Blank	Key not found	Key not found	P
2	ip_address	Delete key	Delete key	P

Attempt 1 screenshot:

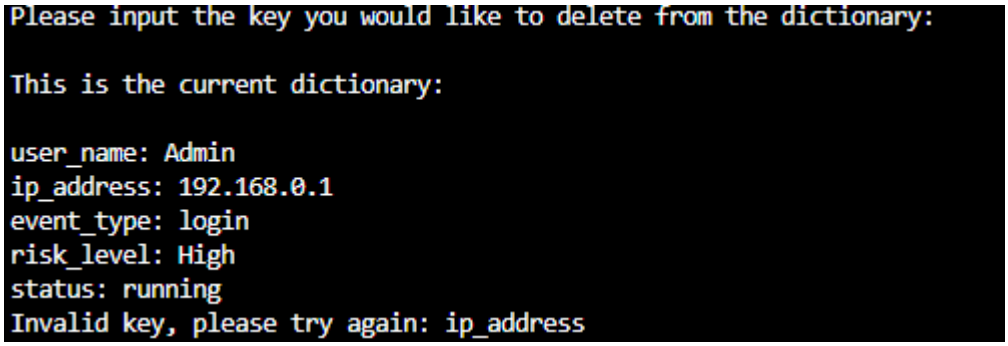

Attempt 2 screenshot:

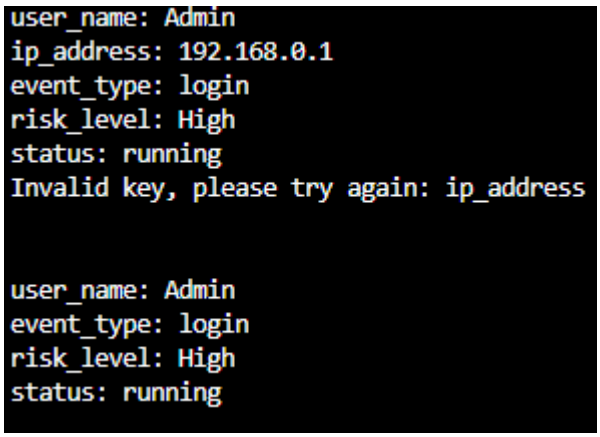

Ctrl + c

Attempt	Input	Expected	Actual	P/F
1	Keyboard – ctrl + c	Program end	Program end	P

Attempt 1 screenshot:

