
Hierarchical Object-Oriented POMDP Planning for Object Rearrangement

Rajesh Mangannavar
Oregon State University
Corvallis, OR 97330, USA
mangannr@oregonstate.edu

Alan Fern
Oregon State University
Corvallis, OR 97330, USA
alan.fern@oregonstate.edu

Prasad Tadepalli
Oregon State University
Corvallis, OR 97330, USA
prasad.tadepalli@oregonstate.edu

Abstract

We present an online planning approach and a new benchmark dataset for solving multi-object rearrangement problems in partially observable, multi-room environments. Current object rearrangement solutions, primarily based on Reinforcement Learning or hand-coded planning methods, often lack adaptability to diverse challenges. To address this limitation, we propose a Hierarchical Object-Oriented Partially Observed Markov Decision Process (HOO-POMDP) planner that leverages object-factored belief representations for efficient multi-object rearrangement. This approach comprises of (a) an object-oriented POMDP planner generating sub-goals, (b) a set of low-level policies for sub-goal achievement, and (c) an abstraction system converting the continuous low-level world into a representation suitable for abstract planning. To enable rigorous evaluation of rearrangement challenges, we introduce MultiRoomR, a comprehensive benchmark featuring diverse multi-room environments with varying degrees of partial observability (10-30% initial visibility), blocked paths, obstructed goals, and multiple objects (10-20) distributed across 2-4 rooms. Experiments demonstrate that our system effectively handles these complex scenarios while maintaining robust performance even with imperfect perception, achieving promising results across both existing benchmarks and our new MultiRoomR dataset.

1 Introduction

Multi-object rearrangement with egocentric vision in realistic simulated home environments is a fundamental challenge in embodied AI, encompassing complex tasks that require perception, planning, navigation, and manipulation. This problem becomes particularly demanding in multi-room settings with partial observability, where large parts of the environment are not visible at any given time. Such scenarios are ubiquitous in everyday life, from tidying up households to organizing groceries, making them critical for the development of next-generation home assistant robots.

Existing approaches to multi-object rearrangement typically fall into two categories: Reinforcement Learning (RL) methods and hand-coded planning systems. RL methods [Weihs et al., 2021] struggle with scaling to complex scenarios, while modular approaches that decompose tasks into subtasks [Gu et al., 2022] have different limitations. Some use predetermined skill sequences, while others employ greedy planners [Trabucco et al., 2022], restricting their ability to determine optimal object interaction orders or to handle novel problems such as blocked paths and obstructed goals. These

scenarios require spatial reasoning about object-object dependencies where placement of one object constrains accessible paths for others. A more general approach that incorporates high-level planning would enable systems to handle these challenges without extensive retraining, particularly important for household robots operating in environments where such obstacles are common.

Although significant progress has been made in rearrangement, the majority of current research focuses on single-room settings or assumes that a large number of objects are visible at the beginning of the task, either through a third-person bird’s eye view [Ghosh et al., 2022] or a first-person view where most of the room is visible [Trabucco et al., 2022]. However, as we move towards the more practical version of the problems, such as cleaning a house, the majority of the objects to be manipulated are not initially visible, and existing solutions begin to falter. Rearrangement in realistic multi-room environments introduces several key challenges: 1) uncertainty over object locations, as the initial positions of objects are unknown; 2) execution efficiency of searching for objects while simultaneously moving them to the correct goal locations; 3) scalability of planning over increasing numbers of objects and rooms; 4) extensibility to scenarios involving blocked goals or blocked paths; and 5) graceful handling of object detection failures. To enable rigorous evaluation of these challenges, we introduce **MultiRoomR**, a comprehensive benchmark dataset featuring diverse multi-room environments with varying degrees of partial observability, blocked paths, obstructed goals, and multiple objects distributed across rooms—scenarios that existing datasets like RoomR [Weihs et al., 2021] do not adequately represent.

To effectively tackle these complex challenges in multi-room settings, we propose a Hierarchical Object-Oriented Partially Observable Markov Decision Process (HOO-POMDP) planner that combines strategic high-level planning with specialized low-level execution. Our approach employs a high-level POMDP planner that reasons under uncertainty while leveraging object-factored belief updates, paired with a set of specialized low-level policies for executing tasks.

The high-level planning with uncertainty enables joint optimization over exploration and object manipulation decisions, determining when to search for unseen objects and when to rearrange detected ones based on the current belief state. Meanwhile, the low-level policies handle the execution details of navigation and manipulation, freeing the high-level planner from concerns about continuous action spaces and perceptual representations. This separation of concerns allows each component to focus on its strengths—strategic decision-making at the high level and specialized task execution at the low level. Our main contributions include:

- A hierarchical planner(HOO-POMDP) that combines an object-oriented POMDP planner with efficient belief updates and state abstraction for scalable rearrangement in multi-room environments.
- A new dataset **MultiRoomR** featuring blocked path problems and expanded room configurations alongside existing rearrangement challenges.
- An empirical evaluation of the system in an existing and the new MultiRoomR dataset in AI2Thor.

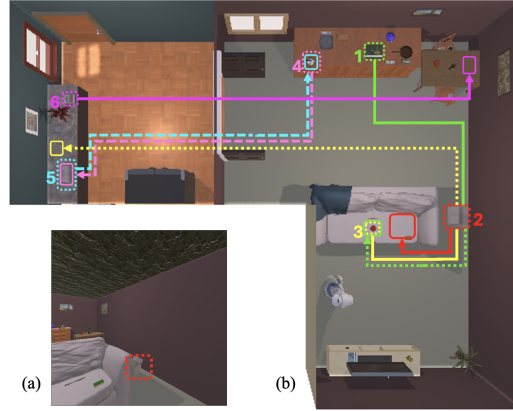


Figure 1: a) Agent’s ego-centric view at initialization. b) Top-down view of the environment showing object starting positions (dotted boxes) and goal positions (solid boxes). Lines indicate paths between start and goal states. Object 1’s path is blocked by object 2, and its goal location is blocked by object 3. Object 3’s path is also blocked by object 2, requiring a specific sequence: move object 2 first, then object 3, and finally object 1. Objects 4 and 5 block each other’s goals, requiring one to be temporarily placed elsewhere before completing the swap.

2 Related Work

Rearrangement: Rearrangement is the problem of manipulating the placement of objects by picking, moving, and placing them according to a goal configuration. In this work, we are mainly concerned with the rearrangement of objects by mobile agents in simulated environments such as AI2Thor [Kolve et al., 2017] and Habitat [Szot et al., 2021] and ThreeDWorld [Gan et al., 2020]. There are many versions of the rearrangement problem in literature. In tabletop rearrangement, a robot hand with a fixed base moves objects around to achieve a certain configuration in a limited space [Zhai et al., 2024, Huang et al., 2024]. Many current approaches for rearrangement by mobile agents work by finding the misplaced objects and then use greedy planners to decide what order to move the objects in [Gadre et al., 2022, Trabucco et al., 2022, Sarch et al., 2022]. This can lead to a high traversal cost since it is not explicitly optimized. The above works and others such as [Mirakhor et al., 2024a] are also limited to a single-room setting where most objects are visible to the agent.

Rearrangement has also been studied from the Task and Motion Planning (TAMP) perspective [Garrett et al., 2020a, 2021, 2020b]. Garrett et al. [2020b] is limited to a single-room kitchen problem and assumes perfect detection of objects. Unlike most previous work, our proposed solution optimizes the traversal cost and addresses multi-room settings and imperfect object detection in an integrated POMDP framework. Tekin et al. [2023] and Mirakhor et al. [2024b] address the multi-room rearrangement problem. However, the decision process of when to explore and when to move an object in [Tekin et al., 2023] is fixed and assumes perfect object detection. Our planner optimally combines exploration and manipulation, and naturally addresses object detector failures. Mirakhor et al. [2024b] assume that objects are always on top of or inside containers. This limits its extendability to handling new problems, such as blocked paths where the objects could be in the path of other objects and outside containers. Our approach naturally allows for these possibilities. Large language models (LLMs) have also been used to solve rearrangement [Chang et al., 2024], but the advantage of a planner is that it provides a completeness guarantee - given enough time, the planner will find a solution whereas an LLM does not provide the same guarantee.

POMDP Planning: Our work builds upon Wandzel et al. [2019]’s object-oriented POMDP (OO-POMDP) for 2D multi-object search, later extended to 3D environments by Zheng et al. [2023] and Zheng et al. [2022]. While these OO-POMDP approaches are limited to search tasks, we extend the formulation to include rearrangement actions with corresponding belief updates. Our HOO-POMDP further introduces action abstraction, distinguishing it from existing hierarchical POMDP work [Serano et al., 2021] which lacks object-oriented belief maintenance. This combination of hierarchical planning with object-oriented beliefs enables efficient planning for complex rearrangement tasks that would be intractable in flat POMDP representations.

3 Problem Formulation

Environment and Agent: Our agent is developed for the AI2Thor simulator environment [Kolve et al., 2017]. It consists of a simulated house with a set of objects located in one or more rooms. The agent can take the following low-level actions: $A_s = (\text{MoveAhead}, \text{MoveBack}, \text{MoveRight}, \text{MoveLeft}, \text{RotateLeft}, \text{RotateRight}, \text{LookUp}, \text{LookDown}, \text{PickObject}_i, \text{PlaceObject}, \text{Start}_{loc}, \text{Done})$. The *Move* actions move the agent by a distance of 0.25m. The *Rotate* actions rotate the agent pitch by 90 degrees. The *Look* actions rotate the agent yaw by 30 degrees. *Start* action starts the simulator and places the agent at the given location, and the *Done* action ends the simulation. After executing any of the actions, the simulator outputs the following information: a) RGB and Depth images, 2) the agent’s position $(x, y, \text{pitch}, \text{yaw})$, and 3) whether the action was successful. There are two types of objects in the world - *interactable* objects that can be picked and placed, and *receptacle* objects that are not movable but can hold other objects.

Task Setup: Rearrangement is done in 2 phases. Walkthrough phase and rearrange phase. The walkthrough phase is meant to get information about stationary objects. The 2D occupancy map is generated in this phase, as well as the corresponding 3D Map. We get the size of the house (width and length) from the environment and uniformly sample points in the environment. We then take steps to reach these locations (if possible - some might be blocked). This simple algorithm ensures we explore the full house. At each of the steps, we receive the RGB and Depth. Using this, we create a 3D point cloud at each step and combine them all to get the overall 3D point cloud of the house with stationary objects. We then discretize this point cloud into 3D map (M^{3D}) voxels of size 0.25m, we further flatten this 3D map into a 2D map (M^{2D}) of grid cells (location in the 2D map is occupied if there exists a point at that 2D location at any height in the 3D map). While doing this traversal,

we also get information about the receptacles by detector on the RGB images we receive during this traversal. This ends the walkthrough phase, which needs to be done only once for any house configuration of stationary objects - walls, doors, tables, etc. Then, objects are placed at random locations (done using AI2Thor environment reinitialization). This is when the rearrangement phase begins, with the planner taking the following as input: the map generated in the walkthrough phase, the set of object classes to move, and their goal locations.

3.1 Rearrangement as a Object Oriented POMDP (OO-POMDP) Problem

Background: POMDP: A POMDP is a 7-tuple $(S, A, T, R, \gamma, O, O_{model})$ [Kaelbling et al., 1998]. The state space S is the set of states in which the agent and the objects in the environment can be. Action space A is the set of actions that can be taken in the environment. The transition function $T(s, a, s') = p(s'|s, a)$ is the probability of reaching the state s' when the action a is taken in the current state s . The probability of observing $z \in O$ after having taken action a in a state s is defined by the observation model $O_{model}(s, a, z) = p(z|s, a)$. The reward function $R(s, a)$ defines the reward received when taking action a in state s , and γ is the discount factor. In a partially observed world, the agent does not know its exact state and maintains a distribution over possible states, i.e., a belief state b . The belief is updated when an action a is taken, and observation z is received with the following equation, where η is the normalizing constant:

$$b'(s') = \eta O_{model}(s', a, z) \sum_{s \in S} T(s, a, s') b(s) \quad (1)$$

Object Oriented POMDP: Object-oriented POMDP factors the state and observations over the objects. Each state s is represented as a tuple of its n objects $s = (s_1, \dots, s_n)$, each observation $z = (z_1, \dots, z_n)$ and the belief state b is factorized as $b = \prod_{i=0}^n b_i$ [Wandzel et al., 2019].

We now instantiate the rearrangement problem as an abstract POMDP. In our definition of the abstract OOPOMDP, we make an object independence assumption - that at any given time, the observation and state of any object do not depend on any other object. More formally, $P(z_i|s_j, z_j, s_i) = P(z_i|s_i)$, observation z_i is independent of the states and observations of other objects, conditioned on its own state s_i . Similarly, we also assume $P(s'_i|s_i, s_j, a) = P(s'_i|s_i, a)$ where $j \neq i$, i.e., the next state of object i only depends on its own previous state and the action. This allows us to represent the state and observation factored by objects, which in turn helps make independent belief updates for each object (Algorithm 1).

- **State Space:** We use a factored state space that includes the robot state s_r , and the target object states $s_{targets}$. The complete state is represented as $s = (s_r, s_{targets})$. $s_{targets} = (s_{target_1}, \dots, s_{target_n})$ where n is the number of objects to be moved. $s_{target_i} = (loc_i, pick_i, place_{locs}, is_held, at_goal, g_i) : loc_i$ is the current location of the object, $pick_i$ corresponds to the location from where this object can be picked, $place_{locs}$ corresponds to the set of locations (absolute 2D coordinates) from where this object can be placed, and g_i is the goal location of the object. All locations are discretized grid coordinates in M^{2D} . This representation captures spatial affordances through $pick_i$ and $place_{locs}$ while maintaining spatial uncertainty via belief distributions over M^{2D} .
- **Action Space:** The action space consists of abstract navigation and interaction actions.
 $A = \{Move_{AB}, Rotate_{angle}, PickPlace_{Object_i-goal_{loc}}, Done\}$
- **Transition Model :**
 - $Move_{AB}$ - The move action moves the agent from location A to location B.
 - $Rotate_{angle}$ - The rotate action rotates the agent to a given angle.
 - $PickPlace_{Object_i-goal_{loc}}$ - The $PickPlace$ action picks $Object_i$ from the current position of the robot and places it at the given $goal_{loc}$.
- **Observation Space:** We use a factored observation space similar to state space factorization. Each observation can be divided into the robot observation and object observation $z = (z_{robot}, z_{objects})$, where $z_{objects} = (z_{target_1}, \dots, z_{target_n})$. Each observation $z_{target_i} \in L \cup \text{Null}$ - is a detection of the object i 's location or Null based on the detector's output for object i (L is the set of all possible locations in M^{2D}).
- **Observation model:** By definition of z above, $\Pr(z|s) = \Pr(z_r|s_r) \Pr(z_{objects}|s_{targets})$ and $\Pr(z_r|s_r) = 1$ since the robot pose changes deterministically. Under the conditional independence assumption, $\Pr(z_{objects}|s)$ can be compactly factored as follows:

$$\Pr(z_{\text{objects}}|s) = \Pr(z_{\text{target}_1}, \dots, z_{\text{target}_n} | s_{\text{target}_1}, \dots, s_{\text{target}_n}, s_r) \quad (2)$$

$$= \prod_{i=1}^n \Pr(z_{\text{target}_i} | s_{\text{target}_1}, \dots, s_{\text{target}_n}, s_r) \quad (\text{all } z_{\text{target}_i} \text{ are independent}) \quad (3)$$

$$= \prod_{i=1}^n \Pr(z_{\text{target}_i} | s_{\text{target}_i}, s_r) \quad (z_{\text{target}_i} \text{ does not depend on state of other objects}) \quad (4)$$

$\Pr(z_i | s_{\text{target}_i}, s_r)$ is defined differently for each object based on the object detector's capability to detect the object of interest and the current state. More details are in A.1.2.

• **Reward Function:**

- Move_{AB} : The cost of moving from location A to B [$\text{Cost} = -1 * N_a$ (where N_a number of required actions)].
- $\text{Rotate}_{\text{angle}}$: The cost of rotating the agent from the current rotation to the final given angle.
- $\text{PickPlace}_{\text{Object}_i - \text{goal}_{i,oc}}$: Cost of moving from current location to goal location + cost of pick + cost of place. It gets an additional reward of 50 if the object is being placed at its goal location g_i and this g_i is free in the current state.
- Done - This action receives a reward of 50 if all objects have been placed at their goal location and -50 otherwise.

4 Hierarchical Object Oriented POMDP (HOO-POMDP) Planning

This section presents our hierarchical planning solution designed to solve multi-object rearrangement problems in partially observable, multi-room simulated home environments.

Overview: Once the initial list of receptacles and M^{3D} have been generated, they, along with the goal information, are sent to the HOO-POMDP planner. The system operates in a cyclic fashion, integrating *perception*, *belief update*, *state abstraction*, *abstract planning*, and *action execution* (see Figure 2 and Algorithm 1). First, the *perception* system detects objects in the RGB and depth image and outputs the observation z , which is used by the *belief update* system to update its belief state. The belief state consists of the probability of each object being at a certain location in M^{2D} . The *abstraction* system uses this information to update its abstract state. The updated abstract state is sent to the abstract POMDP planner, which outputs a sub-goal that corresponds to a low-level policy. The low-level *policy executor* executes the low-level policy corresponding to the sub-goal. This might involve navigating to a specific location, grasping an object, or placing an object in a new position. After each action is executed, the environment state changes. The agent receives new output from the environment, and the cycle repeats until the overall rearrangement task is completed. In the rest of this section, we will discuss each of the subsystems and their interaction.

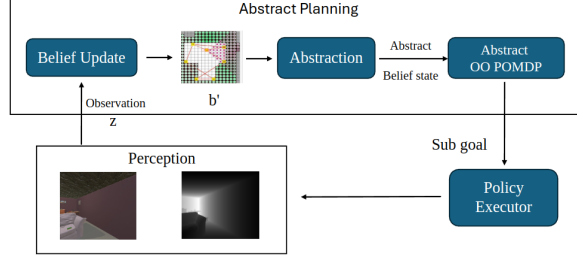


Figure 2: The agent receives RGB and depth images from environment at the start. The vision module creates the observation from this input and sends it to the belief update system. Belief is updated based on observation, and an abstract state is generated, which is sent to the OO POMDP Planner that outputs sub-goals. The sub-goals are used by the low-level policy executors to plan and execute low-level actions in the environment.

Abstract OOPOMDP Planner: Given a task defined as an abstract OOPOMDP and an initial abstract state, we use partially observable UCT (PO-UCT) [Silver and Veness, 2010] to search through the space of abstract actions to find the best sub-goal. POUCT extends the UCT algorithm Kocsis and Szepesvári [2006] to partially observable settings, building a search tree over histories rather than states, where a history is a sequence of actions and observations $h_t = (a_1, z_1, \dots, a_t, z_t)$. For each history node $T(h)$, the algorithm maintains a count variable $N(h)$ and a value variable

$v(h)$ representing visit frequency and expected value. The algorithm samples a state from the belief space b and selects the action with the best value using $V(ha) = V(ha) + c\sqrt{\frac{\log N(h)}{N(ha)}}$ when all child nodes exist. Otherwise, it uses a random rollout policy for simulations before updating the tree and selecting the best action. The full algorithm appears in Algorithm 3 in the Appendix.

In our HOO-POMDP planner, abstract actions are initialized based on the abstract state for each object $s_i = (loc_i, pick_i, place_{locs}, is_held, at_goal)$. A separate $Move_{AB}$ is initialized with $A = agent_pos$ and $B =$ all pick locations defined for all objects. $Rotate_{angle}$ - for all objects, less than 2m from the agent, the angle is computed based on the agent's required orientation to view the object from its current position. $PickPlace$ - is defined for each object where the agent is less than 2m away from that particular object, for all locations in the $place_{locs}$ as $goal_{loc}$ initializing a set of $PickPlace$ actions for each object.

Algorithm 1: HOO-POMDP Planner

```

1.  $env \leftarrow \text{INITIALIZEENV}()$  ;
2.  $agent \leftarrow \text{INITIALIZEAGENT}()$ 
3.  $belief \leftarrow \text{INITIALIZEBELIEFSTATE}()$ 
4.  $loc \leftarrow \text{RANDOM}()$ 
5.  $lowLevelAct \leftarrow \text{START}_{loc}$ 
6. while NOT TASKCOMPLETE() do
7.    $rgb, depth \leftarrow env.EXECUTE(lowLevelAct)$ 
8.    $obs \leftarrow \text{PERCEPTIONSYSTEM}(rgb, depth)$ 
9.    $belief \leftarrow \text{BELIEFUPDATE}(belief, obs, lowLevelAct)$ 
10.   $absState \leftarrow \text{GENERATEABSSTATE}(belief)$ 
11.   $absAct \leftarrow \text{POUCTPLANNER}(absState, belief)$ 
12.  if  $absAct = \text{DONE}$  then
13.    return
14.   $lowLevelPolicy \leftarrow \text{GETLOWLEVELPOLICY}(absAct)$ 
15.   $lowLevelAct \leftarrow lowLevelPolicy.GETACT(absAct, rgb, depth)$ 

```

Algorithm 2: BELIEFUPDATE

```

1. Input: beliefState  $b$ , observation  $z$ , action  $a$ 
2. for each object  $i$  in  $b$  do
3.   for each possible state  $s_{ij}$  of object  $i$  do
4.     if action  $\in \{\text{Pick}, \text{Place}\}$  and successful then
5.       if action is pick then
6.          $b'_i(s_{ij}) \leftarrow \begin{cases} 1 & \text{if } s_i = \text{action.agentLocation} \\ 0 & \text{otherwise} \end{cases}$ 
7.       if action is place then
8.          $b'_i(s_{ij}) \leftarrow \begin{cases} 1 & \text{if } s_{ij} = \text{action.goalLocation} \\ 0 & \text{otherwise} \end{cases}$ 
9.       else
10.         $b'_i(s_{ij}) \leftarrow p(z_i | s_{ij}) b_i(s_{ij})$ 
11.       end if
12.     end for
13.   end for
14. return  $b'$ 

```

Low-Level Policy Executor: Each sub-goal (instantiated abstract action) output by the abstract planner corresponds to a policy. When the planner outputs a sub-goal, the information in the sub-goal is used to initialize the low-level policy. The output from the low-level policy is a sequence of low-level actions. We then execute the first low-level action in this sequence in the environment.

The *Move* sub-goal corresponds to the *Move* policy, which uses the A^* algorithm to move from location A to B. The *Rotate* policy also uses the A^* algorithm. The *PickPlace* policy consists of 2 RL agents and A^* that picks the object from the current location and places it at the goal location.

- Sub-goal $Move_{AB}$ gives the *Move* policy the location B to move to from location A, which is used to initialize the A^* algorithm and get a sequence of low-level move actions to reach goal location B. The action space available to the system is all the *Move* actions and all the rotate actions. It uses an Euclidian distance-based heuristic.
- Sub-goal $Rotate_{angle}$ gives the *Rotate* policy the final angle to be at, which is used as the final state the A^* system must reach. A^* outputs a sequence of rotate actions.
- Sub-goal $PickPlace_{Object_i - goal_{loc}}$ provides the object to interact with and which location to place it at. The policy takes this information as input and outputs a sequence of actions consisting of *Pick*, *Place*, and navigation actions. The *PickPlace* consists of 3 separate components a) An RL model trained to pick an object, b) the A^* navigation model to go its destination c) An RL model trained to place the object when the agent is near the goal. All 3 of these run sequentially and make up the *PickPlace* Policy. It is designed this way to improve modularity and reduce the complexity of each part. All details of the RL policy training are described in appendix A.5

Perception System: Once the agent executes the low-level action, it receives an RGB and Depth image. A detector is used to detect objects in the RGB image, and the depth map is used to get their 3D location in the world. This is used to generate the object-oriented observation $z = (z_1, \dots, z_n)$.

Belief Update: Algorithm 2 presents the belief update function for our HOO-POMDP. The `UpdateBelief` function takes as input the current belief state b , the performed action a , and the received observation z (Line 1.). For each object i in the belief state and each possible state s_{ij} ($j = 1, \dots, L$, where L is the set of all its possible locations in M^{2D}) of that object, the algorithm updates the belief based on the action type. For navigation actions, it applies a probabilistic update using the observation model $p(z_i | s_{ij})$ (Line 10.). For ‘place’ actions, it sets the belief to **1** if the object’s state matches its desired goal location g_i , and **0** otherwise (Line 8.). For ‘pick’ actions, it assigns a belief of **1** if the object’s state corresponds to the agent’s location and **0** otherwise (Line 6.).

Generating Abstract State: We now have a belief state over the set of all possible locations for each object. We need to generate the abstract object-wise state consisting of object location information and their corresponding pick-and-place information. The information that needs to be computed for each object is as follows: $pick_i$, $place_{locs}$, is_held , at_goal .

The value for is_held comes from the previous low-level action and previous state. If the previous state had is_held as false and low-level action was to pick the object of interest, is_held is set to true. If the previous action was not a pick or a pick action for a different object, then the variable remains unchanged. If the previous action was *place* and is_held is true, then it is set to False.

The value for at_goal is copied from the previous state if the last low-level action was not the place action. If it was, and if is_held was true in the previous state, then at_goal is set to true.

The values for $place_{locs}$ are sampled from the object goal location and three nearby receptacles as alternate goal locations for the object. For each of these goal locations, a location from where the object can be placed is sampled.

The location $pick_i$ is sampled based on the belief distribution of where the object could be. It is the location from which the object can be picked. If the distribution over location is spread out, we sample multiple locations (by ensuring each sampled location is far from the other sampled locations for the same object). For both the locations in $place_{locs}$ and for the location $pick_i$, we then check if they are reachable. If they are not, those locations are discarded.

This sampling method enables our system to handle scenarios involving blocked goals, object swaps, and blocked paths effectively. If an object’s path is blocked, the planner will receive information indicating that there is no accessible location from which to pick up the object, necessitating the relocation of other objects first. When placing objects, we provide alternative receptacle locations. This approach allows us to move an object to another location if its goal position is blocked, thereby freeing up its current location. This strategy addresses both blocked goal and swap scenarios. Furthermore, this sampling process enhances our system’s extensibility. We can incorporate additional constraints based on new object properties. For example, if opening an object requires interaction from a distance, the sampler can ensure that the sampled location is sufficiently far to enable successful opening. After creating this abstract state, it is sent to the abstract planner, and the cycle starts again.

5 Experiments

5.1 Datasets

- **RoomR:** This is the rearrangement challenge dataset proposed by Batra et al. [2020]. It contains single-room environments with 5 objects to be rearranged. It has 25 room configurations with 40 different rearrangements for each room configuration.
- **ProcTHORRearrangement (Proc):** This is a dataset present in AI2Thor, which is bigger in terms of the rooms (two rooms, five objects) and, hence, partial observability. It has 125 room configurations with 80 rearrangements for each room configuration.
- **Multi RoomR:** We introduce MultiRoomR, a benchmark testing spatial reasoning through larger multi-room layouts (2-4 rooms), blocked paths requiring understanding of spatial dependencies, an increased number of objects (10-20 objects), and severe partial observability (10-30% initial visibility). It has 400 room configurations. More details in Appendix A.2.5.

5.2 Metrics

- **Scene Success (SS):** **1** if all objects have been moved to the correct goal locations, **0** otherwise.
- **Object Success (OS):** $100 * (\text{Total Objects successfully moved}) / (\text{Total objects to move})$ - this metric captures the percentage of objects moved to the correct goal location.

Table 1: Comparison between all methods. The difficulty is represented in terms of the following: a) **#BP**: Number of objects blocking the path that need to be moved out of the way, b) **#Rm**: Number of rooms in the environment, c) **#V**: Number of objects initially visible. NA: Not applicable as no scene was fully rearranged. NC - Not computable as the method cannot handle blocked paths

Dataset	Objs	#BP	#Rm	#V	Methods												Ablation			Oracle Settings					
					HOOP			FHC			VRR			MSS			HOOP-HP			PK			PD		
					SS↑	OS↑	TA↓	SS↑	OS↑	TA↓	SS↑	OS↑	TA↓	SS↑	OS↑	TA↓	SS↑	OS↑	TA↓	SS↑	OS↑	TA↓	SS↑	OS↑	TA↓
RoomR	5	0	1	3-4	49	71	211	38	58	269	7	31	256	21	44	267	13	33	302	63	88	176	62	87	189
Proc	5	0	2	2-3	46	68	352	32	61	411	2	19	382	14	29	395	9	29	410	60	82	203	60	81	269
Multi RoomR	10	0	2	2-3	32	65	710	20	44	931	0	13	NA	8	25	920	5	25	1029	41	78	457	40	78	529
	10	1	2	2-3	21	49	789	12	38	993	0	9	NA	NC	NC	NC	2	19	1092	33	69	489	29	67	587
	10	0	3-4	1-2	30	62	1189	19	34	1345	0	8	NA	0	14	NA	3	16	1408	39	75	726	37	74	834
	10	1	3-4	1-2	18	44	1321	9	26	1490	0	5	NA	NC	NC	NC	1	7	1549	32	70	789	31	70	985
	15	0	3-4	2-3	22	59	1228	12	31	1605	0	9	NA	0	11	NA	0	5	NA	32	78	895	30	74	921
	15	1	3-4	2-3	14	41	1416	7	23	1886	0	5	NA	NC	NC	NC	0	6	NA	29	71	988	25	69	965
	20	0	3-4	2-4	17	55	1621	0	18	NA	0	6	NA	0	9	NA	0	5	NA	27	75	1168	27	74	1197
	20	1	3-4	2-4	10	36	1786	0	11	NA	0	4	NA	NC	NC	NC	0	4	NA	22	70	1307	20	68	1336

- **Total Actions taken (TA)**: The average number (rounded up) of actions taken during successful runs where the scene was fully rearranged, which is a measure of the efficiency of the system.

5.3 Methods and Baselines definition

- **HOOP (HOO-POMDP Planner)**: Our proposed solution. In this, we will solve the rearrangement challenge where the agent handles perception uncertainty (the detector fails to detect objects in the visual field) along with the object’s position uncertainty using the proposed HOO-POMDP planner.
- **Frontier Exploration + Hand-Coded Interaction (FHC)** : This baseline employs a frontier exploration strategy that systematically explores the environment until objects that need rearrangement are discovered. It uses a confidence-based approach where an object is considered detected when the belief probability exceeds 70%. Once detected, the object is immediately rearranged and the system resumes exploration for the next undetected object. More details in appendix A.6
- **VRR**: This is the model from Weihs et al. [2021] trains and RL agent using PPO [Schulman et al., 2017] and imitation learning with RGB images as input, builds a semantic map using Active Neural Slam [Chaplot et al., 2020] and outputs low-level actions directly.
- **MSS** : System from Trabucco et al. [2022] first builds a 3D map of the whole world, then navigates to each object that needs to be moved and rearranges it.
- **HOOP-HP** (ablation): In this ablation setting, we remove the hierarchical planning and use the POMDP planner to output low-level actions directly.
- **Perfect Knowledge (PK)**: In this oracle setting of our system, we will start with all the information about the world. That is, we know the initial locations of all the objects. This is the upper limit of the system’s performance as there is no uncertainty to manage.
- **Perfect Detector with partial observability (PD)**: In this oracle setting of our system, we solve our multi-object rearrangement problem with a perfect detector (objects in the visual field are detected with 100% probability). The challenge is to find all objects and move them around efficiently.

Experimental setup: Each experimental setting was evaluated across 100 distinct rearrangement configurations. For the RoomR dataset, we utilized 25 different room setups, with four rearrangement configurations per setup. For the other datasets, we employed 100 unique room configurations, each with one rearrangement configuration. In the blocked path scenario, all scenes contained a minimum of one object that needed to be moved to its goal position from its initial location to enable the rearrangement of other objects. Results for blocked goal and swap cases in table 3 in appendix.

6 Results and Discussion

Methods comparison: PK represents our agent’s upper performance bound with no uncertainty. As shown in Table 1, the PD setting achieves comparable scene success and object success rates to PK, demonstrating our POMDP planner effectively handles partial observability. The primary difference appears in action count—PD requires more steps than PK due to PD actually needing to look for the objects and plan with this uncertainty. HOOP system with imperfect detection and partial observability shows reduced success rates as the planner must account for detection failures. Despite only 50-60% detection success across object classes, HOOP still solves many problems comparable to PD, demonstrating its effectiveness in handling detector failures. The increased exploration necessitated by detector failures results in more steps versus other methods. The substantial performance gap between HOOP and HOOP-HP demonstrates the critical importance of our hierarchical abstraction approach.

Comparison to baselines : Our system significantly outperforms all baselines, demonstrating the clear advantages of a principled planning approach. While VRR’s pure reinforcement learning strategy struggles to scale beyond simple environments, failing dramatically as complexity increases, both hand-coded methods (FHC and MSS) also show substantial limitations. FHC not only struggles with complex spatial reasoning but also fails to handle object detection failures effectively, as it lacks a belief-based framework to account for perceptual uncertainty. MSS’s rigid explore-then-rearrange strategy prevents it from addressing blocked paths and causes inefficient execution even in simpler scenarios. These results highlight that planning-based approaches provide essential flexibility and robustness for real-world rearrangement tasks where uncertainty and complexity are inevitable, outperforming both end-to-end learning and hand-engineered heuristic methods.

It is important to note that our system addresses a variant of the multi-object rearrangement problem that differs in key aspects from those tackled by existing baselines. The primary distinction is that we are given information about the classes of objects to be moved, whereas other systems, VRR [Weihs et al., 2021] and MSS [Trabucco et al., 2022] operate without this knowledge. On the other hand, our problem formulation introduces its own set of challenges. In particular, while existing systems report initial visibility of approximately 60% ([Mirakhor et al., 2024b], Table 1) of target objects at the outset of their tasks, only about 20% of the objects are initially visible in our problem settings in MultiRoomR, necessitating more extensive and strategic exploration. This reduced initial visibility significantly increases the complexity of our task in terms of efficient exploration and belief management, and underscores the effectiveness of our approach.

Comparison across datasets : Our system maintains relatively consistent performance across datasets when controlling for room and object count. The RoomR (single room) and Proc (two rooms) datasets show similar success rates despite differing room counts. As we scale to MultiRoomR with more objects, object success rate decreases gradually while scene success drops more sharply since it requires all objects to be successfully rearranged.

Performance across challenges : The blocked path variants consistently show lower success rates due to the increased complexity and limitations in our low-level manipulation policy, which struggles more with floor objects than tabletop ones. The required PickPlace actions increase for blocked path scenarios as the agent must execute intermediate movements to clear pathways.

Error analysis : Most failures stem from two factors: low-level policy limitations in pick/place actions and belief estimation errors from detector failures. When the detector misses an object multiple times, our belief about its presence decreases, making the planner unlikely to revisit that area. False positives can also cause manipulation of incorrect objects. Despite these challenges, our approach significantly outperforms baselines across diverse scenarios. The 15-20% performance gap between blocked/unblocked variants validates our approach to reasoning about spatial dependencies

Limitations: Our system’s object independence assumption fails in cluttered environments, where object states and observations are influenced by nearby objects. This requires modifying our object-oriented belief update to handle these interactions. HOO-POMDP also cannot handle an unknown class of objects. While it is easy enough to categorize all such objects into a single ‘unknown’ class, the difficult part is to plan to find an empty space to move the unknown object to.

7 Conclusion and future work

In this paper, we presented a novel Hierarchical Object-Oriented POMDP Planner (HOO-POMDP) for solving multi-object rearrangement problems in partially observable, multi-room environments. Our approach decomposes the complex task into a high-level abstract POMDP planner for generating sub-goals and low-level policies for execution. Key components include an object-oriented state representation, belief update that handles perception uncertainty, and an abstraction system that bridges the gap between continuous and discrete planning. Experimental results across multiple datasets demonstrate the effectiveness of our approach in handling challenging scenarios such as blocked paths and goals. HOO-POMDP showed robust performance in terms of success rate and efficiency comparable to oracle baselines with perfect knowledge or perfect detection. Notably, our method scaled well to environments with more objects and rooms. Future work could partially relax our object independence assumption to better reflect real-world scenarios and local object dependencies. Another key direction for future work is deploying our planner on physical robots by replacing the reinforcement learning controller with a low-level robot controller.

8 Acknowledgments

This work was supported by the Army Research Office under grant W911NF2210251 and by DARPA under contract HR0011-24-9-0423.

References

- Dhruv Batra, Angel X Chang, Sonia Chernova, Andrew J Davison, Jia Deng, Vladlen Koltun, Sergey Levine, Jitendra Malik, Igor Mordatch, Roozbeh Mottaghi, et al. Rearrangement: A challenge for embodied ai. *arXiv preprint arXiv:2011.01975*, 2020.
- Matthew Chang, Gunjan Chhablani, Alexander Clegg, Mikael Dallaire Cote, Ruta Desai, Michal Hlavac, Vladimir Karashchuk, Jacob Krantz, Roozbeh Mottaghi, Priyam Parashar, et al. Partnr: A benchmark for planning and reasoning in embodied multi-agent tasks. *arXiv preprint arXiv:2411.00081*, 2024.
- Devendra Singh Chaplot, Dhiraj Gandhi, Saurabh Gupta, Abhinav Gupta, and Ruslan Salakhutdinov. Learning to explore using active neural slam. *arXiv preprint arXiv:2004.05155*, 2020.
- Matt Deitke, Eli VanderBilt, Alvaro Herrasti, Luca Weihs, Kiana Ehsani, Jordi Salvador, Winson Han, Eric Kolve, Aniruddha Kembhavi, and Roozbeh Mottaghi. Proctor: Large-scale embodied ai using procedural generation. *Advances in Neural Information Processing Systems*, 35:5982–5994, 2022.
- Samir Yitzhak Gadre, Kiana Ehsani, Shuran Song, and Roozbeh Mottaghi. Continuous scene representations for embodied ai. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 14849–14859, 2022.
- Chuang Gan, Jeremy Schwartz, Seth Alter, Damian Mrowca, Martin Schrimpf, James Traer, Julian De Freitas, Jonas Kubilius, Abhishek Bhandwaldar, Nick Haber, et al. Threedworld: A platform for interactive multi-modal physical simulation. *arXiv preprint arXiv:2007.04954*, 2020.
- Caelan Reed Garrett, Tomás Lozano-Pérez, and Leslie Pack Kaelbling. Pddlstream: Integrating symbolic planners and blackbox samplers via optimistic adaptive planning. In *Proceedings of the international conference on automated planning and scheduling*, volume 30, pages 440–448, 2020a.
- Caelan Reed Garrett, Chris Paxton, Tomás Lozano-Pérez, Leslie Pack Kaelbling, and Dieter Fox. Online replanning in belief space for partially observable task and motion problems. In *2020 IEEE International Conference on Robotics and Automation (ICRA)*, pages 5678–5684. IEEE, 2020b.
- Caelan Reed Garrett, Rohan Chitnis, Rachel Holladay, Beomjoon Kim, Tom Silver, Leslie Pack Kaelbling, and Tomás Lozano-Pérez. Integrated task and motion planning. *Annual review of control, robotics, and autonomous systems*, 4(1):265–293, 2021.

- Sourav Ghosh, Dipanjan Das, Abhishek Chakraborty, Marichi Agarwal, and Brojeshwar Bhowmick. Planning large-scale object rearrangement using deep reinforcement learning. In *2022 International Joint Conference on Neural Networks (IJCNN)*, pages 1–8. IEEE, 2022.
- Jiayuan Gu, Devendra Singh Chaplot, Hao Su, and Jitendra Malik. Multi-skill mobile manipulation for object rearrangement. *arXiv preprint arXiv:2209.02778*, 2022.
- Baichuan Huang, Xujia Zhang, and Jingjin Yu. Toward optimal tabletop rearrangement with multiple manipulation primitives. In *2024 IEEE International Conference on Robotics and Automation (ICRA)*, pages 10860–10866. IEEE, 2024.
- Leslie Pack Kaelbling, Michael L Littman, and Anthony R Cassandra. Planning and acting in partially observable stochastic domains. *Artificial intelligence*, 101(1-2):99–134, 1998.
- Levente Kocsis and Csaba Szepesvári. Bandit based monte-carlo planning. In *European conference on machine learning*, pages 282–293. Springer, 2006.
- Eric Kolve, Roozbeh Mottaghi, Winson Han, Eli VanderBilt, Luca Weihs, Alvaro Herrasti, Daniel Gordon, Yuke Zhu, Abhinav Gupta, and Ali Farhadi. AI2-THOR: An Interactive 3D Environment for Visual AI. *arXiv*, 2017.
- Karan Mirakhor, Sourav Ghosh, Dipanjan Das, and Brojeshwar Bhowmick. Task planning for visual room rearrangement under partial observability. In *The Twelfth International Conference on Learning Representations*, 2024a.
- Karan Mirakhor, Sourav Ghosh, Dipanjan Das, and Brojeshwar Bhowmick. Task planning for object rearrangement in multi-room environments. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 38, pages 10350–10357, 2024b.
- Gabriel Sarch, Zhaoyuan Fang, Adam W Harley, Paul Schydlo, Michael J Tarr, Saurabh Gupta, and Katerina Fragkiadaki. Tidee: Tidying up novel rooms using visuo-semantic commonsense priors. In *European conference on computer vision*, pages 480–496. Springer, 2022.
- John Schulman, Filip Wolski, Prafulla Dhariwal, Alec Radford, and Oleg Klimov. Proximal policy optimization algorithms. *CoRR*, abs/1707.06347, 2017. URL <http://arxiv.org/abs/1707.06347>.
- Sergio A Serrano, Elizabeth Santiago, Jose Martinez-Carranza, Eduardo F Morales, and L Enrique Sucar. Knowledge-based hierarchical pomdps for task planning. *Journal of Intelligent & Robotic Systems*, 101:1–30, 2021.
- David Silver and Joel Veness. Monte-carlo planning in large pomdps. *Advances in neural information processing systems*, 23, 2010.
- Andrew Szot, Alexander Clegg, Eric Undersander, Erik Wijmans, Yili Zhao, John Turner, Noah Maestre, Mustafa Mukadam, Devendra Singh Chaplot, Oleksandr Maksymets, et al. Habitat 2.0: Training home assistants to rearrange their habitat. *Advances in neural information processing systems*, 34:251–266, 2021.
- Engin Tekin, Elaheh Barati, Nitin Kamra, and Ruta Desai. Effective baselines for multiple object rearrangement planning in partially observable mapped environments. *arXiv preprint arXiv:2301.09854*, 2023.
- Brandon Trabucco, Gunnar Sigurdsson, Robinson Piramuthu, Gaurav S Sukhatme, and Ruslan Salakhutdinov. A simple approach for visual rearrangement: 3d mapping and semantic search. *arXiv preprint arXiv:2206.13396*, 2022.
- Arthur Wandzel, Yoonseon Oh, Michael Fishman, Nishanth Kumar, Lawson LS Wong, and Stefanie Tellex. Multi-object search using object-oriented pomdps. In *2019 International Conference on Robotics and Automation (ICRA)*, pages 7194–7200. IEEE, 2019.
- Luca Weihs, Matt Deitke, Aniruddha Kembhavi, and Roozbeh Mottaghi. Visual room rearrangement. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 5922–5931, 2021.

- Guangyao Zhai, Xiaoni Cai, Dianyue Huang, Yan Di, Fabian Manhardt, Federico Tombari, Nassir Navab, and Benjamin Busam. Sg-bot: Object rearrangement via coarse-to-fine robotic imagination on scene graphs. In *2024 IEEE International Conference on Robotics and Automation (ICRA)*, pages 4303–4310. IEEE, 2024.
- Kaiyu Zheng, Rohan Chitnis, Yoonchang Sung, George Konidaris, and Stefanie Tellex. Towards optimal correlational object search. In *2022 International Conference on Robotics and Automation (ICRA)*, pages 7313–7319. IEEE, 2022.
- Kaiyu Zheng, Anirudha Paul, and Stefanie Tellex. Asystem for generalized 3d multi-object search. In *2023 IEEE International Conference on Robotics and Automation (ICRA)*, pages 1638–1644. IEEE, 2023.

A Appendix

A.1 Object Detection

A.1.1 Detection Model : YoloV10

We collect data from the AI2Thor simulator. We do this by placing the agent in random locations in 500 scenes and extracting the RGB images along with the ground truth object bounding box annotations from the simulator. We have 50 pickupable object classes in all our scenes combined. We train the YoloV10 detector (YoloV10-Large, with 25 million parameters) on 10,000 images collected from these 500 scenes. It is trained for 500 epochs, batch size 16. It is trained on RTX 3080 for 12 hours.

A.1.2 Observation Probability for POMDP

The probability of each individual observation based on the current state is the following.

$$\Pr(z_i | s_{target_i}, s_{robot}) = \begin{cases} 1.0 - TP & s_{target_i} \in \mathcal{V}(s_{robot}) \wedge z_i = \text{null} \\ \delta FP / |\mathcal{V}_E(r)| & s_{target_i} \in \mathcal{V}(s_{robot}) \wedge \|z_i - s_{target_i}\| > 3\sigma \\ \delta * TP & s_{target_i} \in \mathcal{V}(s_{robot}) \wedge \|z_i - s_{target_i}\| \leq 3\sigma \\ 1.0 - FP & s_{target_i} \notin \mathcal{V}(s_{robot}) \wedge z_i = \text{null} \\ \delta FP / |\mathcal{V}_E(r)| & s_{target_i} \notin \mathcal{V}(s_{robot}) \wedge z_i \neq \text{null} \end{cases}$$

The detection model is parameterized by

- TP: Is the True positive of the Detection model for object class i .
- FP: Is the False positive of the Detection model for object class i .
- r : is the average distance between the agent and the object for true positive detections.
- $V_E(r)$: It is the visual field of view of 90 degrees within distance r .
- δ : is the distance weight, it is 1 if detection is within $V_E(r)$, else $\delta = 1/d$, where d is the distance from the robot to the object.

The list of TP , FP , and r for the object classes in the dataset presented in table 2.

A.2 MultiRoomR Dataset Details

A.2.1 Overview

Recent advancements in robotic rearrangement have been facilitated by datasets such as RoomR [Batra et al. \[2020\]](#) and ProcThorRearrangement. However, these datasets exhibit significant limitations that prevent them from capturing the complexity of real-world rearrangement scenarios. Specifically, existing datasets are constrained in their scope, typically featuring only 5 objects and limited room configurations (single room in RoomR, two rooms in ProcThorRearrangement). These constraints fail to represent the challenges inherent in real-world environments, where rearrangement tasks frequently span multiple rooms and involve numerous objects.

To address these limitations, we present MultiRoomR, a comprehensive dataset designed to bridge three critical gaps in existing benchmarks. First, MultiRoomR emphasizes partial observability by incorporating scenes with 2-4 rooms where most objects are not immediately visible, thereby ensuring that systems must develop robust strategies for handling incomplete information. Second, the dataset increases scene complexity by including 10-20 objects per environment, necessitating the development of efficient and scalable solutions that can handle larger object sets without compromising optimality. Third, MultiRoomR introduces realistic constraints such as blocked paths, with 50% of scenes containing at least one object that obstructs access to other objects. This feature specifically tests a system's ability to reason about sequential manipulation, as encountered in practical scenarios where intermediate object movements are necessary to complete the primary rearrangement task. By incorporating these challenging aspects, MultiRoomR provides a more rigorous evaluation framework that better aligns with real-world requirements. Systems that demonstrate strong performance on this

Table 2: Performance Metrics by Class : TP = True Positive, FP = False positive, r = average distance

Class	r (m)	TP	FP
AlarmClock	3.010	0.383	0.022
Apple	3.298	0.065	0.002
BaseballBat	2.941	0.499	0.011
BasketBall	2.631	0.336	0.003
Book	2.888	0.535	0.101
Bottle	2.733	0.465	0.006
Bowl	2.695	0.448	0.073
Box	3.977	0.225	0.012
Bread	1.523	0.082	0.010
ButterKnife	2.084	0.156	0.009
CD	2.082	0.085	0.001
Candle	3.325	0.048	0.004
CellPhone	2.137	0.327	0.006
CreditCard	1.107	0.042	0.002
Cup	2.505	0.513	0.012
DishSponge	1.714	0.306	0.003
Kettle	2.655	0.415	0.001
KeyChain	1.725	0.154	0.007
Knife	1.226	0.056	0.002
Ladle	2.333	0.015	0.000
Laptop	3.405	0.605	0.019
Lettuce	2.681	0.336	0.003
Mug	2.734	0.529	0.010
Newspaper	2.286	0.264	0.005
Pan	2.757	0.350	0.012
PaperTowelRoll	3.066	0.338	0.018
Pen	2.471	0.081	0.013
Pencil	1.853	0.040	0.015
PepperShaker	2.042	0.310	0.016
Pillow	3.615	0.683	0.037
Plate	2.278	0.355	0.010
Plunger	2.900	0.745	0.005
Pot	4.064	0.417	0.010
Potato	2.138	0.157	0.004
RemoteControl	2.176	0.324	0.025
SaltShaker	1.940	0.098	0.010
SoapBottle	3.147	0.519	0.038
Spatula	1.443	0.134	0.002
SprayBottle	2.744	0.085	0.031
Statue	3.095	0.650	0.033
TeddyBear	3.093	0.417	0.003
TennisRacket	3.111	0.128	0.017
TissueBox	4.087	0.286	0.003
ToiletPaper	2.806	0.383	0.006
Vase	3.230	0.699	0.095
Watch	1.661	0.210	0.006
WineBottle	2.903	0.667	0.003

dataset are likely to be more suitable for deployment in actual home environments, where partial observability, multi-object manipulation, and complex spatial reasoning are commonplace challenges. We also provide the dataset ¹ and code ² for the community to use. The dataset consists of 400 distinct room configurations, with varying complexity in terms of room count and object arrangements. The dataset composition and room configurations are presented in the rest of this section.

¹Dataset submitted as part of supplementary material

²Link to code: https://anonymous.4open.science/r/ICML_POMDP_rearrangement-4460/

A.2.2 Dataset Creation Criteria

Data generation has 2 parts:

- Basic scene generation is done using ProcThor [Deitke et al., 2022]. To increase task complexity, we (1) add the extra condition, the average distance between an object and its goal is above 25 steps, and (2) sample goal positions in different rooms for at least 50% of the objects.
- Second, for generating blocked path scenes, we use the connected components algorithm. We construct a connected graph of all 2D navigable points in the room. We then find 2*2 grid locations that if not navigable will make a portion of the house not reachable. Among these possible options, we pick the grid that blocks the maximum number of objects from the current starting location of the agent to ensure that not moving a blocking object (of size 2*2) renders a large number of objects inaccessible. We will add this in the appendix.

A.2.3 Dataset Composition

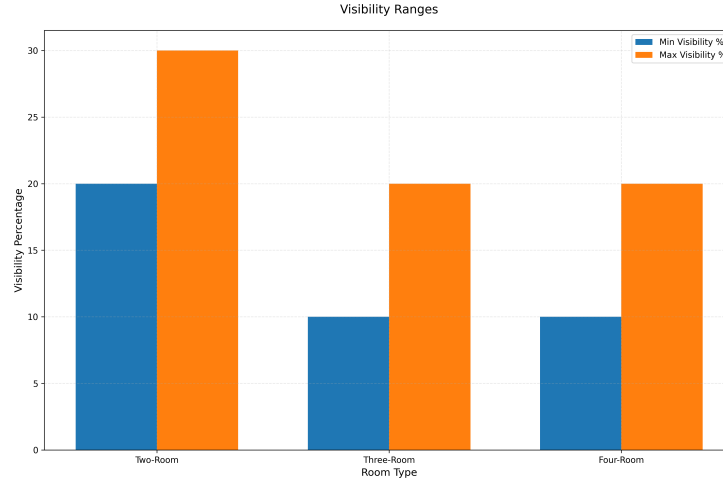


Figure 3: Range of percentage of objects visible at the beginning of a scene

- **Total Size:** 400 room configurations.
- **Object Types:** Comprehensive selection from AI2Thor environment (see Table 2)
- **Object Selection Criteria:** Includes the majority of AI2Thor objects, excluding objects too small for reliable detection even at close range.
- Figure 3 shows the range of percentage of objects visible at the beginning of the scene. Lower the objects visible, more exploration needs to be done thus making the problem harder. It ranges between 10-40% in our dataset where it is 60% in Mirakhori et al. [2024b] Table 1. This implies, only 20-30 % of objects are visible in the beginning for two-room scenes and so on for other room settings.

A.2.4 Room Configuration Distribution

Two-Room Configurations

- Total configurations: 200
- Objects per configuration: 10
- Initial visibility : 20-30% of objects visible at the beginning of the scene
- Path characteristics:

- 50% contain blocked paths.
- 10 rearrangements per configuration.

Three-Room Configurations

- Total configurations: 100
- Path characteristics:
 - 50% contain blocked paths.
 - 30 rearrangements per configuration.
 - Distribution: 10 rearrangements each for 10, 15, and 20 objects.
 - Initial visibility : 10-20% of objects visible at the beginning of the scene

Four-Room Configurations

- Total configurations: 100
- Path characteristics:
 - 50% contain blocked paths.
 - 30 rearrangements per configuration.
 - Distribution: 10 rearrangements each for 10, 15, and 20 objects.
 - Initial visibility : 10-20% of objects visible at the beginning of the scene

A.2.5 Object Placement Criteria

1. **Room-wide Movement Requirement:** Each room must contain at least one object requiring movement, ensuring comprehensive exploration by the agent.
2. **Blocking and Swapping Scenarios:** Configurations include:
 - Objects blocking goal locations of other objects.
 - Objects mutually blocking each other’s goals (swap cases).
3. **Path Blocking Optimization:** In scenes with blocked paths, blocking objects are strategically placed to maximize inaccessible house area such that at least one object must be moved out of the way to access all objects.

A.3 POUCT

A.4 Qualitative Results

We test our system with different depths for the MCTS planner to see how much look-ahead affects the performance of our system. MCTS search depth is one of the important factors determining the amount of exploration and the time taken for search at step. Results are shown in table 3. The depth for the system - HOOP is 12, and the depth for HOOP-MCTS_1 is 1. From the table, we can see that the greedy approach of just looking ahead by 1 step is not enough to solve the rearrangement problem. This is because, when we look ahead only 1 step, we do not get enough reward/feedback from the world about what is a good path to take and hence makes it extremely hard to solve the problem. We can also see that, in the problems it does solve, it takes significantly longer to solve.

We have run our system on the RoomR dataset, and we have results from Mirakhor et al. [2024a] and Mirakhor et al. [2024b] on the RoomR dataset Batra et al. [2020] and show the results in table 4 We can see that our success rate is slightly higher but this is with the caveat that we use more information at the beginning of rearrangement about what objects need to be moved.

Algorithm 3: POUCT Planner

```
1. Input: abstractState  $abs$ , beliefState  $b$ 
2.  $T \leftarrow \{\}$ 
3. For  $j = 0$  to  $SIMULATIONS$ :
4.    $\hat{s} \leftarrow \text{SAMPLE}(b)$ 
5.    $\text{SIMULATE}(\hat{s}, \{\}, 0, abs)$ 
6. Return  $\arg \max_a V(ha)$ 
7. Function  $\text{SAMPLE}(b)$ :
8.   For each object  $o$ :
9.     Sample  $\hat{s}_o \sim b_o$ 
10.  Return  $\bigcup \hat{s}_o$ 
11. Function  $\text{SIMULATE}(s, h, depth, abs)$ :
12.  if  $\gamma^{depth} < \epsilon$ : return 0
13.  if  $h \notin T$ :
14.    Initialize  $T(ha)$  for all actions  $a$ 
15.    Return  $\text{ROLLOUT}(s, h, depth, abs)$ 
16.   $a \leftarrow \text{selectMaxAction}()$ 
17.   $(s', z, r) \sim \mathcal{G}(s, a)$ 
18.   $R \leftarrow r + \gamma \cdot \text{SIMULATE}(s', hao, depth + 1)$ 
19.  Update  $T(ha)$  with new value and count
20.  Return  $R$ 
21. Function  $\text{ROLLOUT}(s, h, depth, abs)$ :
22.  if  $\gamma^{depth} < \epsilon$ : return 0
23.   $a \sim \pi_{rollout}(h, abs)$ 
24.   $(s', o, r) \sim \mathcal{G}(s, a)$ 
25.  Return  $r + \gamma \cdot \text{ROLLOUT}(s', hao, depth + 1)$ 
```

Table 3: Performance metrics for our method across different depths for MCTS search. Metrics: Success Score (SS), Object Success Rate (OSR), Task Actions (TA), execution Time in minutes, and number of objects initially visible (#V). The difficulty parameters include the number of blocked goals (#BG), objects to be swapped (#Sw), blocking objects (#BP), and number of rooms (#Rm). NA: Not Applicable as no scenes were fully rearranged.

Dataset	Objs	#BG	#Sw	#BP	#Rm	#V	HOOP				HOOP-MCSTS_1		
							ap		SS↑	OSR↑	TA↓	Time(m)↓	SS↑
RoomR	5	1	0	0	1	3-4	49	71	211	1.61	8	26	565
Proc	5	1	0	0	2	2-3	46	68	352	3.42	2	12	875
Multi RoomR	10	1	1	0	2	2-3	32	65	710	7.89	0	7	NA
		2	1	1	2	2-3	21	49	789	8.98	0	3	NA
	10	2	1	0	3-4	1-2	30	62	1189	13.45	0	5	NA
		2	1	1	3-4	1-2	18	44	1321	15.97	0	2	NA
	15	1	1	0	3-4	2-3	22	59	1228	19.89	0	0	NA
		2	1	1	3-4	2-3	14	41	1416	22.12	0	0	NA
	20	2	1	0	3-4	2-4	17	55	1621	27.61	0	0	NA
		2	1	1	3-4	2-4	10	36	1786	29.79	0	0	NA

A.5 Low-level RL policy

A.5.1 RL training

We trained our model using PPO [Schulman et al., 2017] with learning rate $\alpha = 2.5 \times 10^{-4}$, clip parameter $\epsilon = 0.1$, value loss coefficient $c_1 = 0.5$ entropy coefficient $c_2 = 0.01$, GAE, recurrent policy, linear learning rate decay, 128 steps per update, 4 mini-batches. We train for 5 million steps on RTX 3080 GPU for 2 days. Observation Space (environment returns these at each step): RGB and Depth image. Agent position (M^{2D} location + pitch + yaw). Object pick location for Pick policy training and object place location for training place policy. We also get

Table 4: Comparison on RoomR dataset

Method	HOOP	Mirakhor et al. [2024a] [Table 2]	Mirakhor et al. [2024b] [Table 4]
Scene Success	49	43	34

information if an action succeeded or failed from the AI2Thor environment. The training process for the pick model involves randomly positioning the target object within a specified proximity to the agent. The goal is to pick a selected object successfully. For the place model, the training methodology follows a similar approach, with the key distinction being the absence of object detection requirements, as the agent begins each scenario already holding the object. In all training instances for the place model, the initial state consists of the agent holding an object, and the task involves depositing the object at a predetermined location.

A.5.2 Action space:

MoveAhead, MoveBack, MoveLeft, MoveRight, LookUp, LookDown, RotateLeft, RotateRight, Pick-Object (for Pick policy only), PlaceObject (for Place policy only)

We allow the Pick and Place policies to have navigation actions because we might not always be in the perfect position to interact with an object and we want our policy to be able to handle these scenarios.

A.5.3 Reward Function:

Reward function: -1 for each navigation action, +50 for successful interaction action, -50 for failed interaction.

A.5.4 Transition function:

The transition function in AI2-Thor is deterministic. For the navigation actions, a move action moves the agent in the selected direction by 1 unit. Rotation action rotates the agent by 45 degrees in the given direction. Look action titles the head of the agent by 30 degrees in the given direction.

A.6 Frontier Exploration + hand coded interaction Method Details

A.6.1 Overview of the Heuristic Approach

Here, we provide a deeper dive into the construction of the hand coded heuristic method. The heuristic method serves as an important baseline that replaces the sophisticated MCTS search planning of our HOO-POMDP with hand-coded expert strategies while retaining the same belief update apparatus. This approach helps us evaluate the specific contribution of principled planning in handling uncertainty during rearrangement tasks.

The algorithm presents our hand-coded heuristic method for object rearrangement tasks, serving as a critical baseline for comparison with the HOO-POMDP approach. As shown in Algorithm 4, this method maintains the same belief update apparatus while substituting sophisticated MCTS planning with expert-designed strategy.

The agent alternates between two phases: exploration (lines 21-23) and object interaction (lines 12-19). During exploration, the agent identifies frontier clusters at the boundary between known and unknown space, navigating to the closest frontier to systematically discover objects. The object interaction phase is triggered when the belief probability for any object exceeds the confidence threshold θ (line 9, 70% for our experiments). When this occurs, the agent temporarily halts exploration to retrieve and place the object at its goal location. The navigation system uses A* and the PickPlace policy is the same as in our HOOP system (uses RL pick, A* navigation and RL place policy to achieve PickPlace).

This approach provides a direct evaluation of the contribution of principled planning in handling uncertainty during rearrangement tasks, as it isolates the planning component while maintaining identical belief representations.

Algorithm 4: Hand-Coded Heuristic Method for Object Rearrangement

Input: Environment E , Set of target objects O , Confidence threshold θ (default: 0.7)

Output: Rearranged objects at goal locations

Initialize belief state B over object locations;

Initialize 2D occupancy grid map M (initially all cells unknown);

Initialize empty set of frontier clusters F ;

Initialize empty set of found objects Found;

while not all objects in O are rearranged **do**

 Update belief state B based on current observations;

$F \leftarrow \text{IdentifyFrontierClusters}(M)$;

foreach object $o \in O$ not yet rearranged **do**

if $\max(B(o)) > \theta$ **and** $o \notin \text{Found}$ **then**

 Add o to Found;

if Found $\neq \emptyset$ **then**

$o_{\text{closest}} \leftarrow \text{GetClosestObjectFrom}(\text{Found})$;

 Remove o_{closest} from Found;

$\text{loc}_{\text{object}} \leftarrow \arg \max(B(o_{\text{closest}}))$;

 NavigateTo($\text{loc}_{\text{object}}$);

 PickPlace(o_{closest})

else

$f_{\text{closest}} \leftarrow \text{GetClosestFrontierCluster}(F)$;

 NavigateTo(f_{closest});

 Update M based on new observations;

Since this is a simple system, it is limited to basic rearrangement and cannot be generalized to more complex problems - such as blocked goals. We would have to hand-design a new policy for each new case whereas our HOOP system can handle and plan for new scenarios much more easily.

A.6.2 Confidence Threshold Selection

The 70% confidence threshold was carefully calibrated for the specific characteristics of our problem:

1. **Higher thresholds (>70%):** With our imperfect object detector (50-60% success rate), setting a higher confidence threshold would result in many objects never exceeding the threshold even when directly observed multiple times. This would lead to excessive exploration and low task completion rates.
2. **Lower thresholds (<70%):** Setting a lower threshold increases the risk of false positives, where the agent attempts to interact with an object that isn't actually present at the believed location. Our implementation treats failed pick attempts as definitive evidence that the object is not present, and the agent will not try again at that location. Therefore, false positives can permanently prevent successful rearrangement of certain objects.
3. **Empirical optimization:** The 70% threshold represents an empirically determined balance that maximizes overall task completion while minimizing both excessive exploration and false positive interactions.

A.7 Component Glossary for HOO-POMDP

This glossary provides standardized terminology for the key components of our Hierarchical Object-Oriented POMDP (HOO-POMDP) approach to help readers maintain a clear understanding throughout the paper.

A.7.1 Core System Components

Term	Definition	Algorithm 1 Reference
HOO-POMDP	The complete hierarchical planning system for object rearrangement in partially observable environments.	Full Algorithm 1
Perception Subsystem	Processes RGB and depth images to detect objects and generate observations.	PERCEPTIONSYSTEM() (line 8)
Belief Update Subsystem	Maintains and updates probability distributions over possible object locations. Fully described in Algorithm 2	BELIEFUPDATE() (line 9)
Abstraction System	Converts continuous low-level belief state into discrete abstract state.	GENERATEABSSTATE() (line 10)
Abstract OOPOMDP Planner	Uses POUCT to search through abstract actions and find the best sub-goal.	POUCTPLANNER() (line 11)
Policy Executor	Converts abstract sub-goals into sequence of executable low-level actions. It also executes the first low-level action in the above sequence in the environment.	GETLOWLEVELPOLICY() (line 14) lowLevelPolicy.GetAct (Line 15) ENV.EXECUTE() (line 7)

A.7.2 Key Data Structures

Term	Definition	Representation
Belief State	Probability distribution over possible locations for each object.	$b = \prod_{i=1}^n b_i$
Abstract State	Discrete representation of the world state used by the planner.	$s = (s_r, s_{targets})$
Observation	Detection of object locations from the perception system.	$z = (z_{robot}, z_{objects})$
2D Occupancy Map	Discretized grid representation of the navigable space.	M^{2D}

A.7.3 Key Actions and Policies

Term	Definition	Examples
Abstract Actions	High-level actions output by the abstract planner.	MoveAB, Rotate _{angle}
Sub-goals	Task-oriented goal states for low-level policies to achieve.	PickPlaceObject _{i-goalloc}
Low-level Actions	Primitive actions executed directly in the environment.	MoveAhead, PickObject
Low-level Policies	Controllers that translate abstract actions into action sequences.	Move, Rotate, PickPlace

A.7.4 Algorithm Components

Term	Definition	Reference
POUCT	Partially Observable UCT - search algorithm for the abstract planner.	Algorithm 3
Frontier Exploration	Strategy to systematically explore unknown areas.	Appendix A.6
A* Algorithm	Path planning algorithm for navigation between locations.	Policy Executor (line 248)

A.7.5 Object State Representation

Term	Definition	Components
Object State	Complete representation of an object in the abstract state.	$(loc_i, pick_i, placeloc_s, is_held, at_goal, g_i)$
Pick Location	Location from which an object can be picked up.	$pick_i$
Place Locations	Set of locations where an object can be placed.	$placeloc_s$
Goal Location	Target location for task completion.	g_i

NeurIPS Paper Checklist

1. Claims

Question: Do the main claims made in the abstract and introduction accurately reflect the paper's contributions and scope?

Answer: [\[Yes\]](#)

Justification: Our stated contribution of solving multi-room rearrangement problems using a planning framework is shown along with it's results in table 1

Guidelines:

- The answer NA means that the abstract and introduction do not include the claims made in the paper.
- The abstract and/or introduction should clearly state the claims made, including the contributions made in the paper and important assumptions and limitations. A No or NA answer to this question will not be perceived well by the reviewers.
- The claims made should match theoretical and experimental results, and reflect how much the results can be expected to generalize to other settings.
- It is fine to include aspirational goals as motivation as long as it is clear that these goals are not attained by the paper.

2. Limitations

Question: Does the paper discuss the limitations of the work performed by the authors?

Answer: [\[Yes\]](#)

Justification: Discussed in the results and discussion section

Guidelines:

- The answer NA means that the paper has no limitation while the answer No means that the paper has limitations, but those are not discussed in the paper.
- The authors are encouraged to create a separate "Limitations" section in their paper.
- The paper should point out any strong assumptions and how robust the results are to violations of these assumptions (e.g., independence assumptions, noiseless settings, model well-specification, asymptotic approximations only holding locally). The authors should reflect on how these assumptions might be violated in practice and what the implications would be.
- The authors should reflect on the scope of the claims made, e.g., if the approach was only tested on a few datasets or with a few runs. In general, empirical results often depend on implicit assumptions, which should be articulated.
- The authors should reflect on the factors that influence the performance of the approach. For example, a facial recognition algorithm may perform poorly when image resolution is low or images are taken in low lighting. Or a speech-to-text system might not be used reliably to provide closed captions for online lectures because it fails to handle technical jargon.
- The authors should discuss the computational efficiency of the proposed algorithms and how they scale with dataset size.
- If applicable, the authors should discuss possible limitations of their approach to address problems of privacy and fairness.
- While the authors might fear that complete honesty about limitations might be used by reviewers as grounds for rejection, a worse outcome might be that reviewers discover limitations that aren't acknowledged in the paper. The authors should use their best judgment and recognize that individual actions in favor of transparency play an important role in developing norms that preserve the integrity of the community. Reviewers will be specifically instructed to not penalize honesty concerning limitations.

3. Theory assumptions and proofs

Question: For each theoretical result, does the paper provide the full set of assumptions and a complete (and correct) proof?

Answer: [\[Yes\]](#)

Justification: Assumptions stated in section 4, claims made and proved in the same section.

Guidelines:

- The answer NA means that the paper does not include theoretical results.
- All the theorems, formulas, and proofs in the paper should be numbered and cross-referenced.
- All assumptions should be clearly stated or referenced in the statement of any theorems.
- The proofs can either appear in the main paper or the supplemental material, but if they appear in the supplemental material, the authors are encouraged to provide a short proof sketch to provide intuition.
- Inversely, any informal proof provided in the core of the paper should be complemented by formal proofs provided in appendix or supplemental material.
- Theorems and Lemmas that the proof relies upon should be properly referenced.

4. Experimental result reproducibility

Question: Does the paper fully disclose all the information needed to reproduce the main experimental results of the paper to the extent that it affects the main claims and/or conclusions of the paper (regardless of whether the code and data are provided or not)?

Answer: [\[Yes\]](#)

Justification: We provide all details of our detector training, RL training and hyperparameters in the appendix. We also provide link to our code and submit benchmark dataset as part of supplementary material.

Guidelines:

- The answer NA means that the paper does not include experiments.
- If the paper includes experiments, a No answer to this question will not be perceived well by the reviewers: Making the paper reproducible is important, regardless of whether the code and data are provided or not.
- If the contribution is a dataset and/or model, the authors should describe the steps taken to make their results reproducible or verifiable.
- Depending on the contribution, reproducibility can be accomplished in various ways. For example, if the contribution is a novel architecture, describing the architecture fully might suffice, or if the contribution is a specific model and empirical evaluation, it may be necessary to either make it possible for others to replicate the model with the same dataset, or provide access to the model. In general, releasing code and data is often one good way to accomplish this, but reproducibility can also be provided via detailed instructions for how to replicate the results, access to a hosted model (e.g., in the case of a large language model), releasing of a model checkpoint, or other means that are appropriate to the research performed.
- While NeurIPS does not require releasing code, the conference does require all submissions to provide some reasonable avenue for reproducibility, which may depend on the nature of the contribution. For example
 - (a) If the contribution is primarily a new algorithm, the paper should make it clear how to reproduce that algorithm.
 - (b) If the contribution is primarily a new model architecture, the paper should describe the architecture clearly and fully.
 - (c) If the contribution is a new model (e.g., a large language model), then there should either be a way to access this model for reproducing the results or a way to reproduce the model (e.g., with an open-source dataset or instructions for how to construct the dataset).

- (d) We recognize that reproducibility may be tricky in some cases, in which case authors are welcome to describe the particular way they provide for reproducibility. In the case of closed-source models, it may be that access to the model is limited in some way (e.g., to registered users), but it should be possible for other researchers to have some path to reproducing or verifying the results.

5. Open access to data and code

Question: Does the paper provide open access to the data and code, with sufficient instructions to faithfully reproduce the main experimental results, as described in supplemental material?

Answer: [Yes]

Justification: Yes. Link to code provided in appendix with all instructions in ReadMe. Dataset will be submitted as part of supplementary material.

Guidelines:

- The answer NA means that paper does not include experiments requiring code.
- Please see the NeurIPS code and data submission guidelines (<https://nips.cc/public/guides/CodeSubmissionPolicy>) for more details.
- While we encourage the release of code and data, we understand that this might not be possible, so “No” is an acceptable answer. Papers cannot be rejected simply for not including code, unless this is central to the contribution (e.g., for a new open-source benchmark).
- The instructions should contain the exact command and environment needed to run to reproduce the results. See the NeurIPS code and data submission guidelines (<https://nips.cc/public/guides/CodeSubmissionPolicy>) for more details.
- The authors should provide instructions on data access and preparation, including how to access the raw data, preprocessed data, intermediate data, and generated data, etc.
- The authors should provide scripts to reproduce all experimental results for the new proposed method and baselines. If only a subset of experiments are reproducible, they should state which ones are omitted from the script and why.
- At submission time, to preserve anonymity, the authors should release anonymized versions (if applicable).
- Providing as much information as possible in supplemental material (appended to the paper) is recommended, but including URLs to data and code is permitted.

6. Experimental setting/details

Question: Does the paper specify all the training and test details (e.g., data splits, hyperparameters, how they were chosen, type of optimizer, etc.) necessary to understand the results?

Answer: [Yes]

Justification: All of it is provided in the appendix for both the Detector and RL policies in sections A.5 and A.1.

Guidelines:

- The answer NA means that the paper does not include experiments.
- The experimental setting should be presented in the core of the paper to a level of detail that is necessary to appreciate the results and make sense of them.
- The full details can be provided either with the code, in appendix, or as supplemental material.

7. Experiment statistical significance

Question: Does the paper report error bars suitably and correctly defined or other appropriate information about the statistical significance of the experiments?

Answer: [No]

Justification: We present a total of 210 results in our main table and more in appendix. It would be too space consuming to provide error bars for all. We ensure statistical significance by running our system on a large number of problems for each setting. Number of scenes described in experiments section.

Guidelines:

- The answer NA means that the paper does not include experiments.
- The authors should answer "Yes" if the results are accompanied by error bars, confidence intervals, or statistical significance tests, at least for the experiments that support the main claims of the paper.
- The factors of variability that the error bars are capturing should be clearly stated (for example, train/test split, initialization, random drawing of some parameter, or overall run with given experimental conditions).
- The method for calculating the error bars should be explained (closed form formula, call to a library function, bootstrap, etc.)
- The assumptions made should be given (e.g., Normally distributed errors).
- It should be clear whether the error bar is the standard deviation or the standard error of the mean.
- It is OK to report 1-sigma error bars, but one should state it. The authors should preferably report a 2-sigma error bar than state that they have a 96% CI, if the hypothesis of Normality of errors is not verified.
- For asymmetric distributions, the authors should be careful not to show in tables or figures symmetric error bars that would yield results that are out of range (e.g. negative error rates).
- If error bars are reported in tables or plots, The authors should explain in the text how they were calculated and reference the corresponding figures or tables in the text.

8. Experiments compute resources

Question: For each experiment, does the paper provide sufficient information on the computer resources (type of compute workers, memory, time of execution) needed to reproduce the experiments?

Answer: [Yes]

Justification: All compute information provided in appendix section A.1 and A.5 and table 3.

Guidelines:

- The answer NA means that the paper does not include experiments.
- The paper should indicate the type of compute workers CPU or GPU, internal cluster, or cloud provider, including relevant memory and storage.
- The paper should provide the amount of compute required for each of the individual experimental runs as well as estimate the total compute.
- The paper should disclose whether the full research project required more compute than the experiments reported in the paper (e.g., preliminary or failed experiments that didn't make it into the paper).

9. Code of ethics

Question: Does the research conducted in the paper conform, in every respect, with the NeurIPS Code of Ethics <https://neurips.cc/public/EthicsGuidelines>?

Answer: [Yes]

Justification: There were no human subjects involved in this research and it uses only open source data.

Guidelines:

- The answer NA means that the authors have not reviewed the NeurIPS Code of Ethics.

- If the authors answer No, they should explain the special circumstances that require a deviation from the Code of Ethics.
- The authors should make sure to preserve anonymity (e.g., if there is a special consideration due to laws or regulations in their jurisdiction).

10. **Broader impacts**

Question: Does the paper discuss both potential positive societal impacts and negative societal impacts of the work performed?

Answer: [NA]

Justification: This work is currently limited to simulation environments.

Guidelines:

- The answer NA means that there is no societal impact of the work performed.
- If the authors answer NA or No, they should explain why their work has no societal impact or why the paper does not address societal impact.
- Examples of negative societal impacts include potential malicious or unintended uses (e.g., disinformation, generating fake profiles, surveillance), fairness considerations (e.g., deployment of technologies that could make decisions that unfairly impact specific groups), privacy considerations, and security considerations.
- The conference expects that many papers will be foundational research and not tied to particular applications, let alone deployments. However, if there is a direct path to any negative applications, the authors should point it out. For example, it is legitimate to point out that an improvement in the quality of generative models could be used to generate deepfakes for disinformation. On the other hand, it is not needed to point out that a generic algorithm for optimizing neural networks could enable people to train models that generate Deepfakes faster.
- The authors should consider possible harms that could arise when the technology is being used as intended and functioning correctly, harms that could arise when the technology is being used as intended but gives incorrect results, and harms following from (intentional or unintentional) misuse of the technology.
- If there are negative societal impacts, the authors could also discuss possible mitigation strategies (e.g., gated release of models, providing defenses in addition to attacks, mechanisms for monitoring misuse, mechanisms to monitor how a system learns from feedback over time, improving the efficiency and accessibility of ML).

11. **Safeguards**

Question: Does the paper describe safeguards that have been put in place for responsible release of data or models that have a high risk for misuse (e.g., pretrained language models, image generators, or scraped datasets)?

Answer: [NA]

Justification: The paper poses no such risks

Guidelines:

- The answer NA means that the paper poses no such risks.
- Released models that have a high risk for misuse or dual-use should be released with necessary safeguards to allow for controlled use of the model, for example by requiring that users adhere to usage guidelines or restrictions to access the model or implementing safety filters.
- Datasets that have been scraped from the Internet could pose safety risks. The authors should describe how they avoided releasing unsafe images.
- We recognize that providing effective safeguards is challenging, and many papers do not require this, but we encourage authors to take this into account and make a best faith effort.

12. **Licenses for existing assets**

Question: Are the creators or original owners of assets (e.g., code, data, models), used in the paper, properly credited and are the license and terms of use explicitly mentioned and properly respected?

Answer: [Yes]

Justification: We describe the usage of Deitke et al. [2022] in our data generation process in section A.2. The data used is available through open-source to everyone.

Guidelines:

- The answer NA means that the paper does not use existing assets.
- The authors should cite the original paper that produced the code package or dataset.
- The authors should state which version of the asset is used and, if possible, include a URL.
- The name of the license (e.g., CC-BY 4.0) should be included for each asset.
- For scraped data from a particular source (e.g., website), the copyright and terms of service of that source should be provided.
- If assets are released, the license, copyright information, and terms of use in the package should be provided. For popular datasets, paperswithcode.com/datasets has curated licenses for some datasets. Their licensing guide can help determine the license of a dataset.
- For existing datasets that are re-packaged, both the original license and the license of the derived asset (if it has changed) should be provided.
- If this information is not available online, the authors are encouraged to reach out to the asset's creators.

13. New assets

Question: Are new assets introduced in the paper well documented and is the documentation provided alongside the assets?

Answer: [NA]

Justification: While we release new a new dataset, we re-use existing open-source assets to create our new dataset.

Guidelines:

- The answer NA means that the paper does not release new assets.
- Researchers should communicate the details of the dataset/code/model as part of their submissions via structured templates. This includes details about training, license, limitations, etc.
- The paper should discuss whether and how consent was obtained from people whose asset is used.
- At submission time, remember to anonymize your assets (if applicable). You can either create an anonymized URL or include an anonymized zip file.

14. Crowdsourcing and research with human subjects

Question: For crowdsourcing experiments and research with human subjects, does the paper include the full text of instructions given to participants and screenshots, if applicable, as well as details about compensation (if any)?

Answer: [NA]

Justification: The paper does not involve crowdsourcing nor research with human subjects.

Guidelines:

- The answer NA means that the paper does not involve crowdsourcing nor research with human subjects.
- Including this information in the supplemental material is fine, but if the main contribution of the paper involves human subjects, then as much detail as possible should be included in the main paper.

- According to the NeurIPS Code of Ethics, workers involved in data collection, curation, or other labor should be paid at least the minimum wage in the country of the data collector.

15. Institutional review board (IRB) approvals or equivalent for research with human subjects

Question: Does the paper describe potential risks incurred by study participants, whether such risks were disclosed to the subjects, and whether Institutional Review Board (IRB) approvals (or an equivalent approval/review based on the requirements of your country or institution) were obtained?

Answer: [NA]

Justification: The paper does not involve crowdsourcing nor research with human subjects.

Guidelines:

- The answer NA means that the paper does not involve crowdsourcing nor research with human subjects.
- Depending on the country in which research is conducted, IRB approval (or equivalent) may be required for any human subjects research. If you obtained IRB approval, you should clearly state this in the paper.
- We recognize that the procedures for this may vary significantly between institutions and locations, and we expect authors to adhere to the NeurIPS Code of Ethics and the guidelines for their institution.
- For initial submissions, do not include any information that would break anonymity (if applicable), such as the institution conducting the review.

16. Declaration of LLM usage

Question: Does the paper describe the usage of LLMs if it is an important, original, or non-standard component of the core methods in this research? Note that if the LLM is used only for writing, editing, or formatting purposes and does not impact the core methodology, scientific rigor, or originality of the research, declaration is not required.

Answer: [NA]

Justification: cCre method development in this research does not involve LLMs as any important, original, or non-standard components

Guidelines:

- The answer NA means that the core method development in this research does not involve LLMs as any important, original, or non-standard components.
- Please refer to our LLM policy (<https://neurips.cc/Conferences/2025/LLM>) for what should or should not be described.