Microbiome Premature

Jaewoong Lee

Ulsan National Institute of Science and Technology jwlee230@unist.ac.kr

2020-09-22

Overview

- Introduction
- 2 Materials
- 3 Literature Survey I (Dominguez-Bello et al., 2016)
- 4 Literature Survey II (Fettweis et al., 2019)
- Methods
- 6 Results
- Proceedings
 References

Introduction

Microbiome

- Microbiota: the microorganisms which live inside & on humans (Turnbaugh et al., 2007)
- Microbiome: 10^{13} to 10^{14} microorganisms whose which collective genome (Gill et al., 2006)



Figure: Concept of a core human microbiome (Turnbaugh et al., 2007)

rRNA

- Ribosomal RNA
- Well-known as a key to phylogeny (Olsen & Woese, 1993)

Premature (Preterm Birth)



Figure: Definitions of Premature (Tucker & McGuire, 2004)

∴ Hence, in this study,

• Premature: < 37 weeks

• Normal: \geq 37 weeks

Materials

16s rRNA Sequencing

8 / 40

Train/Test Data vs. Validate Data

- Train/Test data
 - Helixco: Data collected by Helixco
- Validate data
 - EBI (European Bioinformatics Institute): Data collected by Dominguez-Bello et al., 2016
 - HMP (Human Microbiome Project): Data collected by Fettweis et al., 2019

Data	Participants	Samples	etc.
Helixco	24	107	
EBI	18	1016	Only Normal
HMP	1572	9205	Only Premature

Literature Survey I (Dominguez-Bello et al., 2016)

Literature Survey II (Fettweis et al., 2019)

Methods

Qiime 2



Figure: QIIME 2 workflow (Bolyen et al., 2019; Mandal et al., 2015; McDonald et al., 2012)

Filitering with Quality Score I

Drawback between:

- Longer sequence read
- Higher quality value

 \therefore I select the length n where:

$$\forall n_i \in \{n_k | \text{MedianQualityScore} \ge 30\}$$

$$\exists! n \in \{n_i\} : n \ge n_i$$
 (1)

Filitering with Quality Score II




Figure: Sequence Quality Plot from Helixco Data

Filitering with Quality Score III


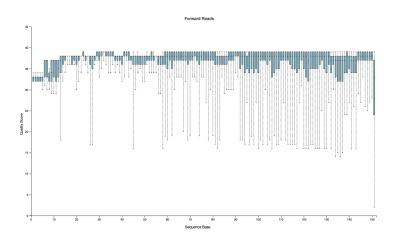


Figure: Sequence Quality Plot from EBI

Jaewoong Lee (UNIST)

Filitering with Quality Score IV

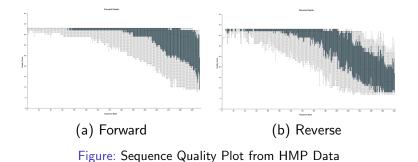

Denoising Techniques

- DADA2: Amplicon Sequence Variants (ASVs) (Callahan et al., 2016)
- Deblur: Operational Taxonomic Units (OTUs) (Amir et al., 2017)

Taxonomy Classification

- Greengenes (GG): Kingdom ↔ Species (DeSantis et al., 2006)
- SILVA: Domain ↔ Genus (Pruesse et al., 2007; Quast et al., 2012)

"A **higher** performance at taxonomic levels above *genus level*; but performance appears to **drop** at *species level*" (Gihawi et al., 2019)

Mothur



Figure: Mothur

Note: Still in progress

t-distributed Stochastic Neighbor Embedding (t-SNE)

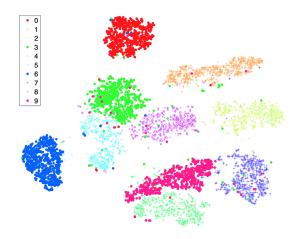


Figure: t-SNE with handwritten data (Maaten & Hinton, 2008)

Python Packages

- Pandas (McKinney et al., 2011)
- Scikit-Learn (Pedregosa et al., 2011)
- Matplotlib (Hunter, 2007)
- Seaborn (Waskom et al., 2020)

Results

t-SNE for Brief Information I






Figure: t-SNE for Brief Information

t-SNE for Brief Information II

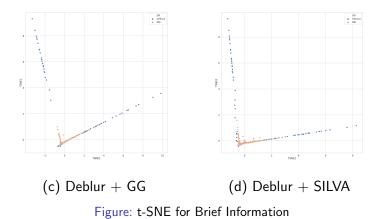


4 D > 4 A > 4 B > 4 B > B = 900

t-SNE with Site I





(a) DADA2 + GG



(b) DADA2 + SILVA

t-SNE with Site II






(c) Deblur + GG

(d) Deblur + SILVA


Figure: t-SNE with Site

t-SNE with Site + Premature I

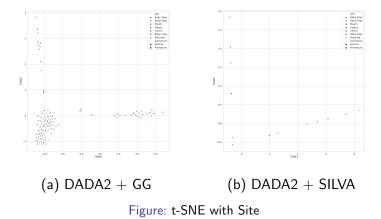

4 D > 4 A > 4 B > 4 B > B = 900

t-SNE with Site + Premature II

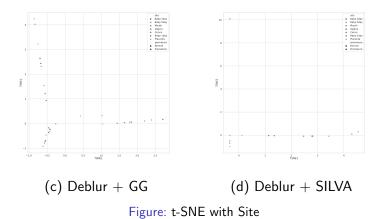

Histogram with Clinical Information

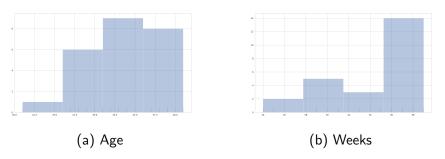


Figure: Histogram with Clinical Information

Proceedings

Yields I

- t-SNE plots
 - in Brief
 - by Site
 - by Site + Premature
- Histogram
 - by Age
 - by Weeks
- Have tried (but in vain)
 - ANCOM with premature/normal
 - Classification with raw TSV

Requirements I

- More data
- Mothur pipeline
- Classification

Expectations I

Classifier result (Statistical values)

References I

- Amir, A., McDonald, D., Navas-Molina, J. A., Kopylova, E., Morton, J. T., Xu, Z. Z., . . . others (2017). Deblur rapidly resolves single-nucleotide community sequence patterns. *MSystems*, 2(2).
- Bolyen, E., Rideout, J. R., Dillon, M. R., Bokulich, N. A., Abnet, C. C., Al-Ghalith, G. A., . . . Caporaso, J. G. (2019). Reproducible, interactive, scalable and extensible microbiome data science using qiime 2. *Nature Biotechnology*, *37*(8), 852-857. Retrieved from https://doi.org/10.1038/s41587-019-0209-9 doi: 10.1038/s41587-019-0209-9
- Callahan, B. J., McMurdie, P. J., Rosen, M. J., Han, A. W., Johnson, A. J. A., & Holmes, S. P. (2016). Dada2: high-resolution sample inference from illumina amplicon data. *Nature methods*, *13*(7), 581–583.

References II

- DeSantis, T. Z., Hugenholtz, P., Larsen, N., Rojas, M., Brodie, E. L., Keller, K., . . . Andersen, G. L. (2006). Greengenes, a chimera-checked 16s rrna gene database and workbench compatible with arb. *Applied and environmental microbiology*, 72(7), 5069–5072.
- Dominguez-Bello, M. G., De Jesus-Laboy, K. M., Shen, N., Cox, L. M., Amir, A., Gonzalez, A., ... others (2016). Partial restoration of the microbiota of cesarean-born infants via vaginal microbial transfer. *Nature medicine*, *22*(3), 250.
- Fettweis, J. M., Serrano, M. G., Brooks, J. P., Edwards, D. J., Girerd, P. H., Parikh, H. I., . . . others (2019). The vaginal microbiome and preterm birth. *Nature medicine*, *25*(6), 1012–1021.

References III

- Gihawi, A., Rallapalli, G., Hurst, R., Cooper, C. S., Leggett, R. M., & Brewer, D. S. (2019). Sepath: benchmarking the search for pathogens in human tissue whole genome sequence data leads to template pipelines. Genome biology, 20(1), 1-15.
- Gill, S. R., Pop, M., DeBoy, R. T., Eckburg, P. B., Turnbaugh, P. J., Samuel, B. S., ... Nelson, K. E. (2006). Metagenomic analysis of the human distal gut microbiome. science, 312(5778), 1355-1359.
- Hunter, J. D. (2007). Matplotlib: A 2d graphics environment. Computing in science & engineering, 9(3), 90–95.
- Maaten, L. v. d., & Hinton, G. (2008). Visualizing data using t-sne. Journal of machine learning research, 9(Nov), 2579–2605.
- Mandal, S., Van Treuren, W., White, R. A., Eggesbø, M., Knight, R., & Peddada, S. D. (2015). Analysis of composition of microbiomes: a novel method for studying microbial composition. Microbial ecology in health and disease, 26(1), 27663. doi: 10.3402/mehd.v26.27663

References IV

- McDonald, D., Clemente, J. C., Kuczynski, J., Rideout, J. R., Stombaugh, J., Wendel, D., . . . Caporaso, J. G. (2012). The biological observation matrix (biom) format or: how i learned to stop worrying and love the ome-ome. *GigaScience*, 1(1), 7. doi: 10.1186/2047-217X-1-7
- McKinney, W., et al. (2011). pandas: a foundational python library for data analysis and statistics. *Python for High Performance and Scientific Computing*, 14(9).
- Olsen, G. J., & Woese, C. R. (1993). Ribosomal rna: a key to phylogeny. *The FASEB journal*, 7(1), 113–123.
- Pedregosa, F., Varoquaux, G., Gramfort, A., Michel, V., Thirion, B., Grisel, O., . . . others (2011). Scikit-learn: Machine learning in python. the Journal of machine Learning research, 12, 2825–2830.

References V

- Pruesse, E., Quast, C., Knittel, K., Fuchs, B. M., Ludwig, W., Peplies, J., & Glöckner, F. O. (2007). Silva: a comprehensive online resource for quality checked and aligned ribosomal rna sequence data compatible with arb. *Nucleic acids research*, *35*(21), 7188–7196.
- Quast, C., Pruesse, E., Yilmaz, P., Gerken, J., Schweer, T., Yarza, P., ... Glöckner, F. O. (2012). The silva ribosomal rna gene database project: improved data processing and web-based tools. *Nucleic acids research*, *41*(D1), D590–D596.
- Tucker, J., & McGuire, W. (2004). Epidemiology of preterm birth. *Bmj*, 329(7467), 675–678.
- Turnbaugh, P. J., Ley, R. E., Hamady, M., Fraser-Liggett, C. M., Knight, R., & Gordon, J. I. (2007). The human microbiome project. *Nature*, 449(7164), 804–810.

References VI

```
Waskom, M., Botvinnik, O., Ostblom, J., Gelbart, M., Lukauskas, S., Hobson, P., ... Brian (2020, April). mwaskom/seaborn: v0.10.1 (april 2020). Zenodo. Retrieved from https://doi.org/10.5281/zenodo.3767070 doi: 10.5281/zenodo.3767070
```