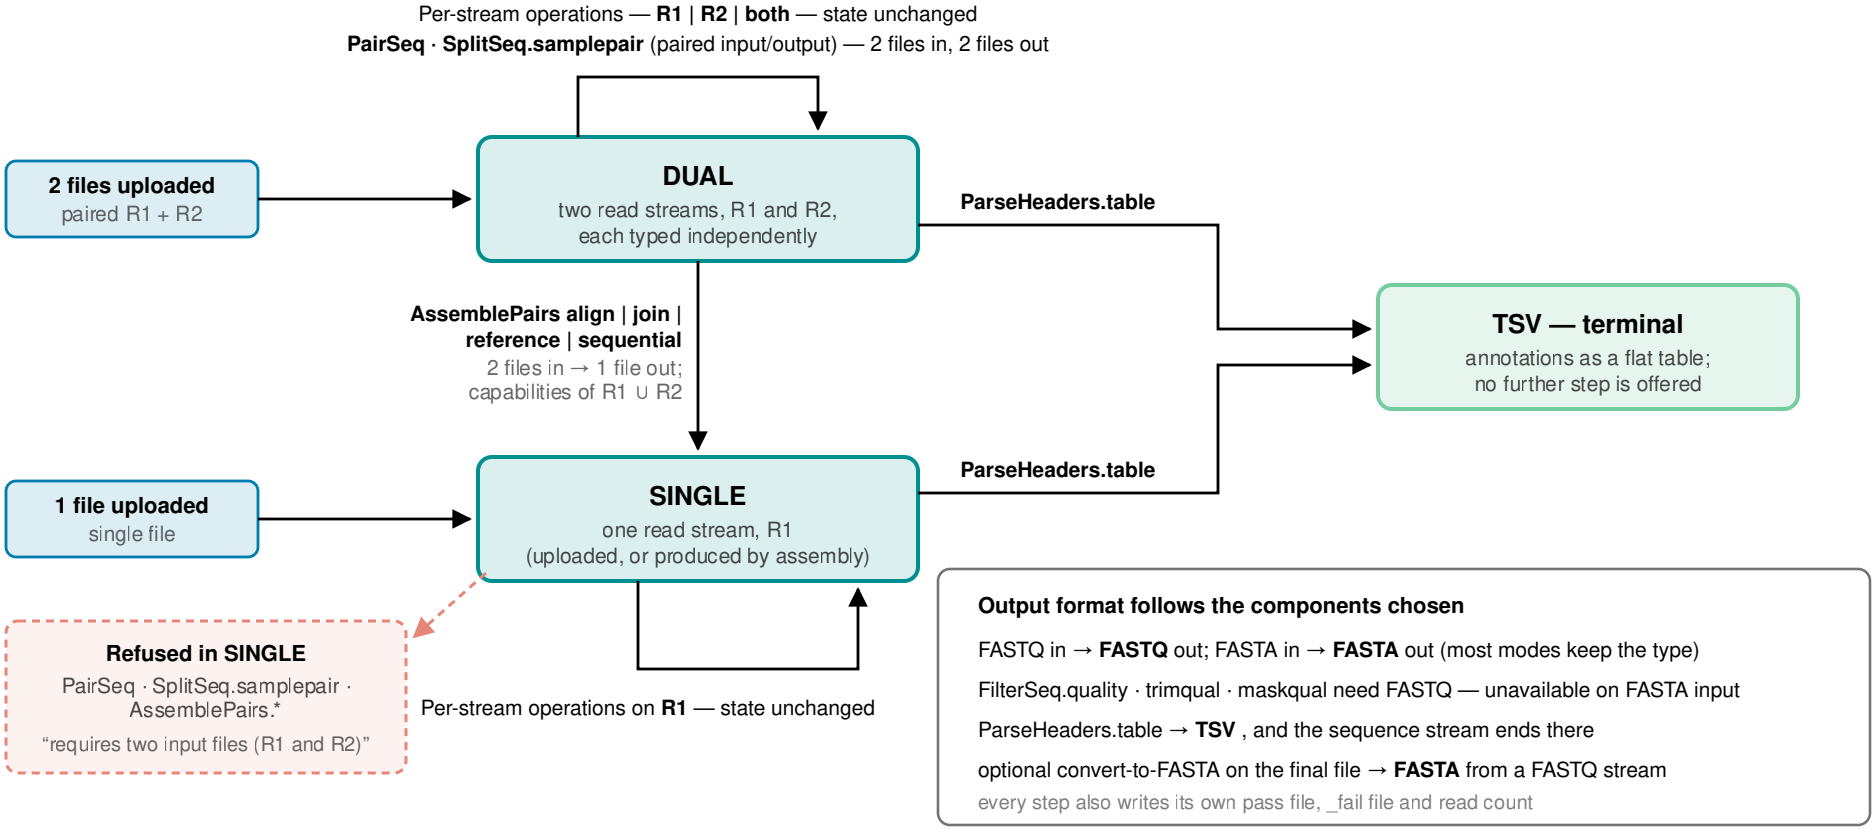

Per-stream operations — R1 | R2 | both — state unchanged
PairSeq · SplitSeq.samplepair (paired input/output) — 2 files in, 2 files out
2 files uploaded
paired R1 + R2
DUAL
two read streams, R1 and R2,
each typed independently
ParseHeaders.table
TSV — terminal
annotations as a flat table;
no further step is offered
AssemblePairs align | join |
reference | sequential
2 files in → 1 file out;
capabilities of R1 ∪ R2
1 file uploaded
single file
SINGLE
one read stream, R1
(uploaded, or produced by assembly)
ParseHeaders.table
Refused in SINGLE
PairSeq · SplitSeq.samplepair ·
AssemblePairs.*
“requires two input files (R1 and R2)”
Per-stream operations on R1 — state unchanged
Output format follows the components chosen
FASTQ in → FASTQ out; FASTA in → FASTA out (most modes keep the type)
FilterSeq.quality · trimqual · maskqual need FASTQ — unavailable on FASTA input
ParseHeaders.table → TSV , and the sequence stream ends there
optional convert-to-FASTA on the final file → FASTA from a FASTQ stream
every step also writes its own pass file, _fail file and read count