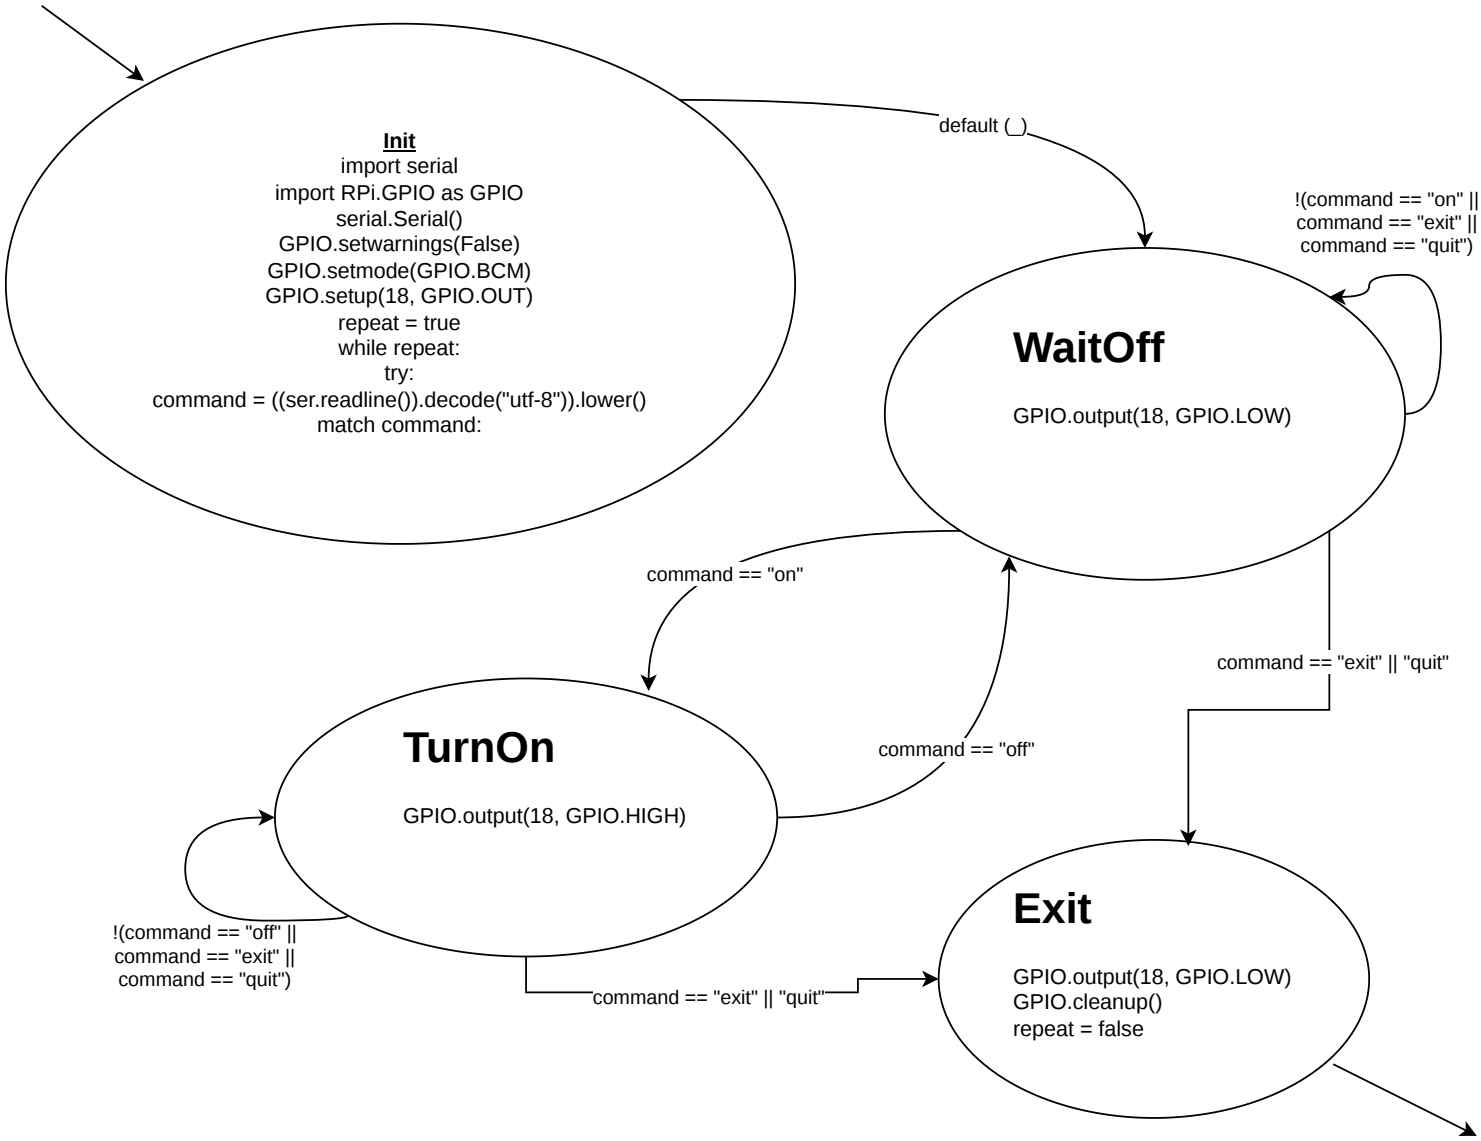
Init
import serial
import RPi.GPIO as GPIO
serial.Serial()
GPIO.setwarnings(False)
GPIO.setmode(GPIO.BCM)
GPIO.setup(18, GPIO.OUT)
repeat = true
while repeat:
try:
command = ((ser.readline()).decode("utf-8")).lower()
match command:
default (_)
WaitOff
GPIO.output(18, GPIO.LOW)
!(command == "on" ||
command == "exit" ||
command == "quit")
command == "on"
command == "off"
TurnOn
GPIO.output(18, GPIO.HIGH)
!(command == "off" ||
command == "exit" ||
command == "quit")
command == "exit" || "quit"
command == "exit" || "quit"
Exit
GPIO.output(18, GPIO.LOW)
GPIO.cleanup()
repeat = false