



USER MANUAL

DATA ORCID CHILE

A complete guide to options and features for User and OAI User.

INSTITUTIONAL DISCOVERY · ANALYTICS · DATA QUALITY · INTEGRATION

DATAORCID
Chile

WORKSPACE

Overview

Explore

Manage data

Integrate

Support

Sign out

≡ Demonstration University

Data up to date | EN | User manual | user.demo

Institutional overview

ORCID data updated 2026-09-04 23:49

Synchronization up to date

Your institutional ORCID data is ready to explore.

Not enough dated publication records are available for an equivalent year-to-date comparison.

Explore analytics

INSTITUTIONAL RESEARCHERS

8

8 verified · 0 inferred

UNIQUE SCHOLARLY OUTPUTS

48

48 cached ORCID records

FUNDINGS

8

8 Cached funding records

OPENALEX-ENRICHED OUTPUTS

48

3528 citations · 39 open access

Scientific production and OpenAlex enrichment by year

Publications Fundings OpenAlex

Annual ORCID records and OpenAlex-enriched works available in the institutional cache.

Not enough dated records for a year-to-date comparison.

8

7

6

5

4

3

2

1

0

2022

2023

2024

2025

2026 YTD

Coverage and quality

Coverage shows how completely known researchers are described; quality flags records that may need institutional review.

Verified researcher relationships

100%

Percentage of known institutional ORCID IDs supported by a verified affiliation, rather than inferred only from cached activity.

Profiles with names

100%

Percentage of known institutional ORCID profiles with a credit, given, or family name in the local cache.

Potential duplicate groups

0

Candidate groups detected from similar names or shared evidence. They require review and are not confirmed duplicates.

View data quality

Datasets

Institutional records available from ORCID and OpenAlex.

Manage exports

DATASET	RECORDS	LAST UPDATE	STATUS
Publications	48	2026-09-04 23:49	Updated

VERSION

2.1

UPDATED

September 2026

AUDIENCE

User / OAI User

Contents

• 1. Purpose and scope	3
• 2. Access and navigation	4
• 3. Explore	6
• 4. Manage data	13
• 5. OpenAlex analytics	18
• 6. Integrate	24
• 7. Help center	34
• 8. Account and security	35
• 9. Sources, methods, and good practice	37
• 10. Glossary	38
• 11. Troubleshooting	40

**IMPORTANT**

All five editions have the same content and page numbering. Screenshots and control names use each edition's language. This manual is limited to User and OAI User.

Quick access to new workflows

4.2 Background exports	14
6.5 OAI-PMH publishing	28
6.6 OAI-PMH article selection	29
6.7 Metadata formats and mapping	30
6.8 Bulk DOI activation	31
6.9 Import audit and undo	32
6.10 Harvesting access	33

1. Purpose and scope

DATA ORCID CHILE lets you explore and analyze public ORCID information enriched with OpenAlex metadata. This manual follows the User and OAI User journey: access, discovery, analytics, downloads, integration, and account settings.

Both roles work within the institution assigned to their account and the modules that are enabled. OAI User adds actions for article selection, DOI imports, OAI-PMH metadata mapping, and harvesting access.

This edition covers background exports, OAI-PMH publishing, and help adapted to the available modules.

ACTION	USER	OAI USER
Explore institutional modules	Available	Available
Download visible data and reports	Available	Available
Inspect duplicate candidates	Read only	Read only
Review OAI-PMH content	Read only	Available
Select articles and import DOI	Read only	Available
Edit dataorcid mapping	Read only	Available
Edit own account and password	Available	Available



IMPORTANT

Screenshots show the version 2.1 interface with fictional demonstration data. Example names, ORCID iDs, DOIs, RORs, and addresses must not be used as real records.

2. Access and navigation

2.1 Signing in

Visit www.orcid.cl and sign in with your account username or institutional email and password. Remember me is appropriate only on a personal device or one managed by your institution.

The welcome email includes your credentials and a link to this PDF manual, which you can download without signing in. The link opens the edition matching your account language: English, Spanish, French, Portuguese, or German. Change the temporary password when you sign in.

If you have forgotten your password, open the recovery link, enter your account email, and follow the link you receive. The on-screen response does not disclose whether an address is registered. If no message arrives, check spam and contact the responsible support team.

The selector offers the enabled languages: English, Spanish, French, Portuguese, and German. A language selected while signed in is saved as your account preference.

DATAORCID
Chile

INSTITUTIONAL RESEARCH METADATA

Sign in

Sign in to access institutional data

Username or Email

Enter your username

Password

Enter your password

☐ Keep me logged in [Forgot Password?](#)

[Sign In](#)

[English](#) · [Español](#) · [Français](#) · [Português](#) · [Deutsch](#)

FIGURE 1 Sign-in and language selection.

2.2 Interface structure

The sidebar organizes work into Explore, Manage data, Integrate, and Support, alongside the Overview shortcut. The top bar shows the active institution, language, and personal options. Available modules depend on service configuration and your account role. The “User manual” link, with a PDF icon beside your account options, downloads this manual in the active language.

Update indicators help you recognize whether information is current or needs attention. Check this status before interpreting a figure or downloading a dataset.

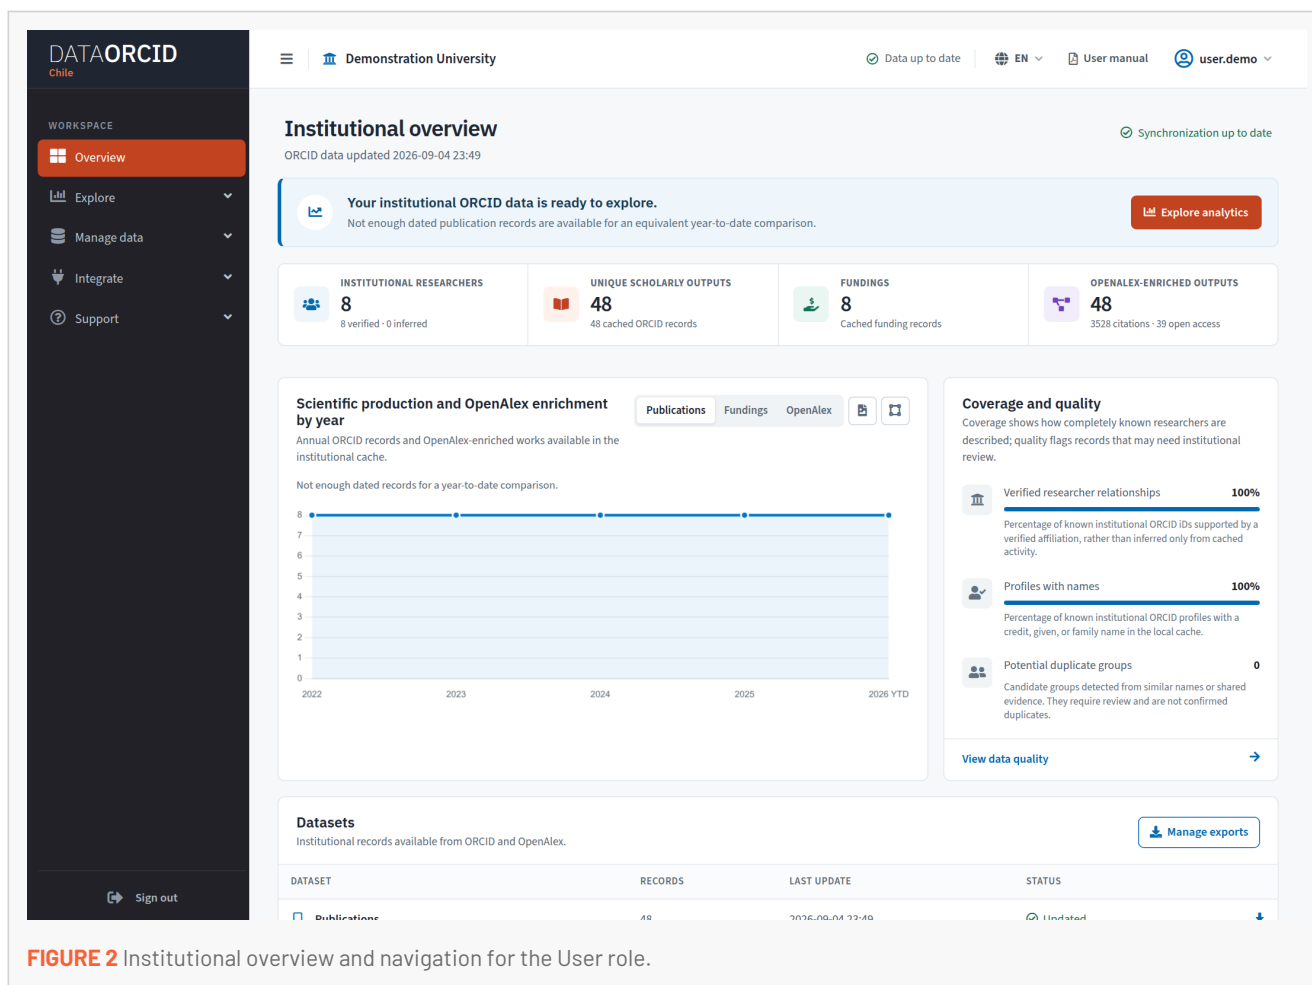


FIGURE 2 Institutional overview and navigation for the User role.

- 1 Confirm that the displayed institution matches your account.
- 2 Expand a menu group and choose the page you need.
- 3 Review filters and update dates in each view.
- 4 When finished, sign out at the bottom of the sidebar.

3. Explore

3.1 Institutional overview

The Overview brings together institutional researchers, unique scholarly outputs, funding, and OpenAlex-enriched publications. It includes trends, coverage, data quality, and shortcuts to discovery and downloads.

Start here to check the overall state. Open the relevant analytics page to investigate a figure and use the quality shortcuts to understand information gaps.

Figures reflect information available in the platform. A researcher may appear in the institutional directory without any public works or funding records in the cache.

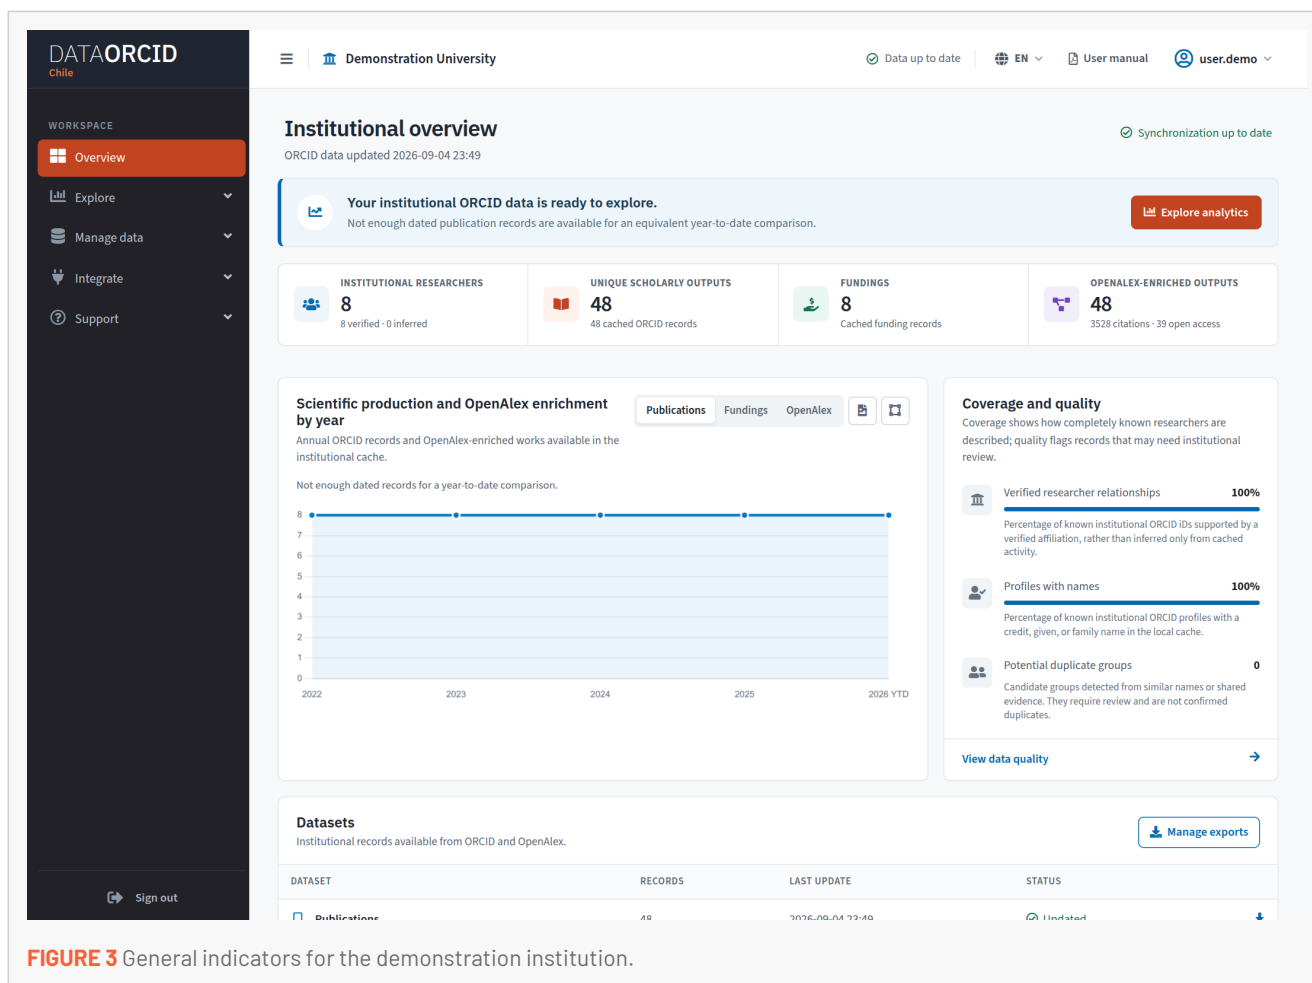


FIGURE 3 General indicators for the demonstration institution.



IMPORTANT

ORCID records count source occurrences. Canonical outputs consolidate possible repetitions. These figures can differ without indicating an error.

3.2 Researcher directory

The Directory lets you search by name, ORCID iD, or email, filter by Affiliation Manager and institutional relationship evidence, and sort the results. You can display 10, 25, or 50 rows per page.

Search and sorting apply to the result set. CSV and Excel export the filtered results, including records beyond the visible page.

Verified evidence may come from ROR, GRID, or Ringgold identifiers. A cache-inferred relationship is an operational signal and should be distinguished from a verified association.

DATA ORCID Chile

WORKSPACE

- Overview
- Explore
- PEOPLE
 - Researchers
- INDICATORS
 - ORCID analytics
 - OpenAlex analytics
- Manage data
- Integrate
- Support

Researcher directory

Find affiliated researchers, review profile quality, and compare cached activity.

RESEARCHERS 8
0 inferred relationships

MANAGED BY AM 4

PROFILES WITH NAMES 8

VERIFIED ASSOCIATIONS 8
Confirmed by institutional identifiers

Researcher directory

Search and refine the synchronized institutional directory.

Search: Name, ORCID ID, or email

Affiliation Manager: Any status

Relationship evidence: Any evidence

Apply

Researchers

Open a profile to review its public ORCID information.

Showing 1-8 of 8 10

RESEARCHER	AFFILIATION MANAGER	RELATIONSHIP EVIDENCE	WORKS	FUNDINGS
Ana Demo 0000-0000-0000-0001 researcher1@example.org	Managed	ROR Verified	6	1
Bruno Sample 0000-0000-0000-0002 researcher2@example.org	Not managed	ROR Verified	6	1
Camila Example 0000-0000-0000-0003 researcher3@example.org	Managed	ROR Verified	6	1
Diego Demo 0000-0000-0000-0004 researcher4@example.org	Not managed	ROR Verified	6	1
Elena Sample 0000-0000-0000-0005 researcher5@example.org	Managed	ROR Verified	6	1
Felipe Example 0000-0000-0000-0006 researcher6@example.org	Not managed	ROR Verified	6	1
Gabriela Demo	Managed	ROR Verified	6	1

FIGURE 4 Directory with filters, sorting, pagination, and exports.


- 1 Enter a search term and apply the relevant filters.
- 2 Select a column heading to change the order.
- 3 Open an ORCID iD to view its portfolio or export the filtered set.

3.3 Researcher portfolio

Opening an ORCID iD from the Directory lets you inspect public record details, biography, identifiers, visual summaries, institutional context, and available activities.

Refresh from ORCID requests that public profile again; it does not update the entire institution. Download full report produces an Excel file. You can also export available sections such as education, employment, works, and funding.

The ORCID.org link opens the original public record. A section may be absent because it contains no public data. Institutional context helps distinguish source work records from consolidated unique outputs.

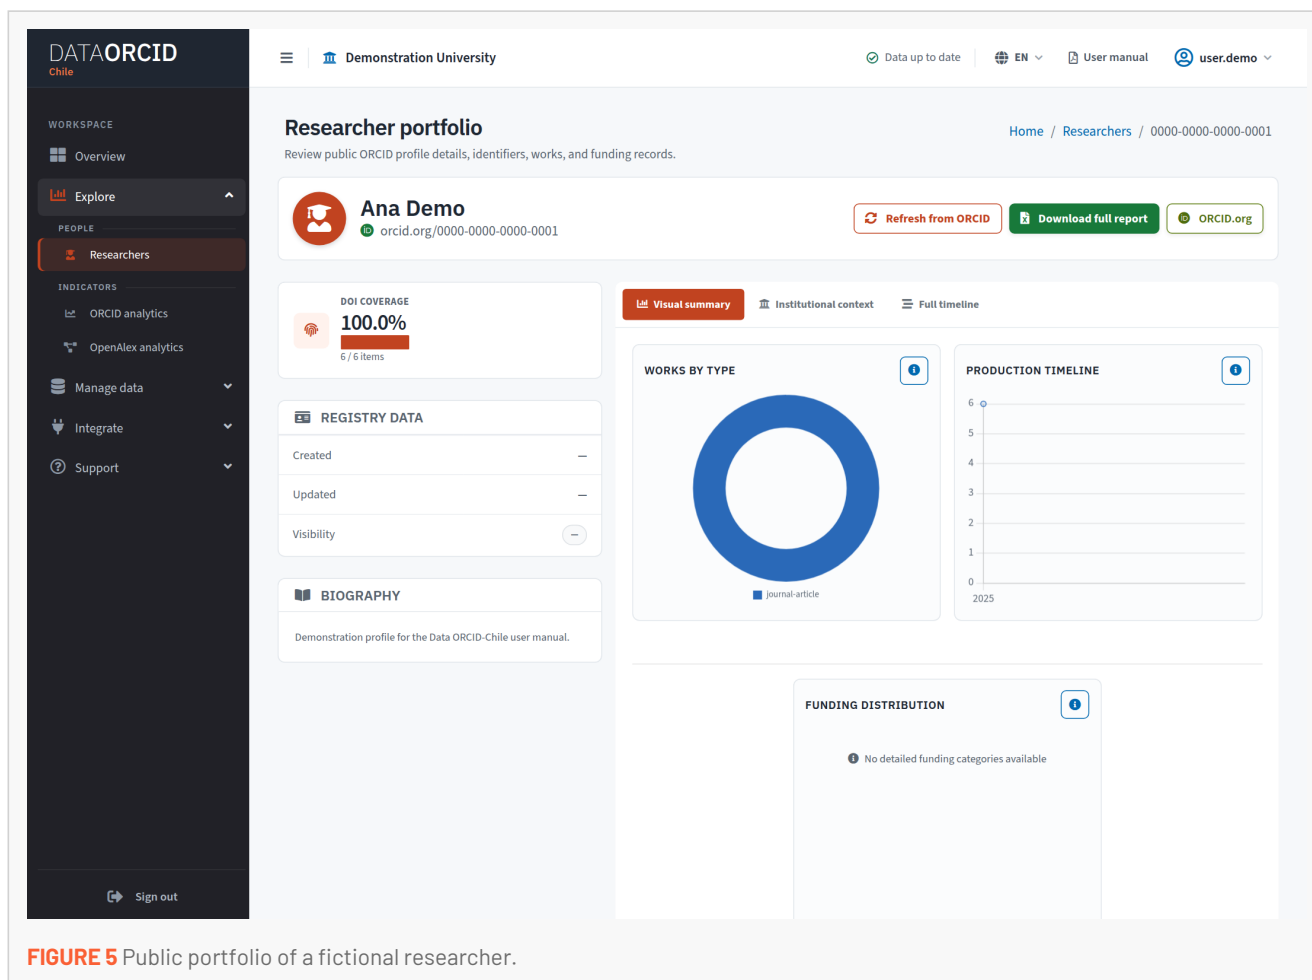


3.4 ORCID analytics

ORCID analytics uses institutional records cached from ORCID. Filters combine period, work type, funding type, and researcher. An empty filter includes all available values.

Overview, Publications, Funding, and Researchers offer different views of the filtered set. Check the filters when switching sections.

Each chart's data exports provide CSV or Excel. Where an image control is present, you can also save the visualization.

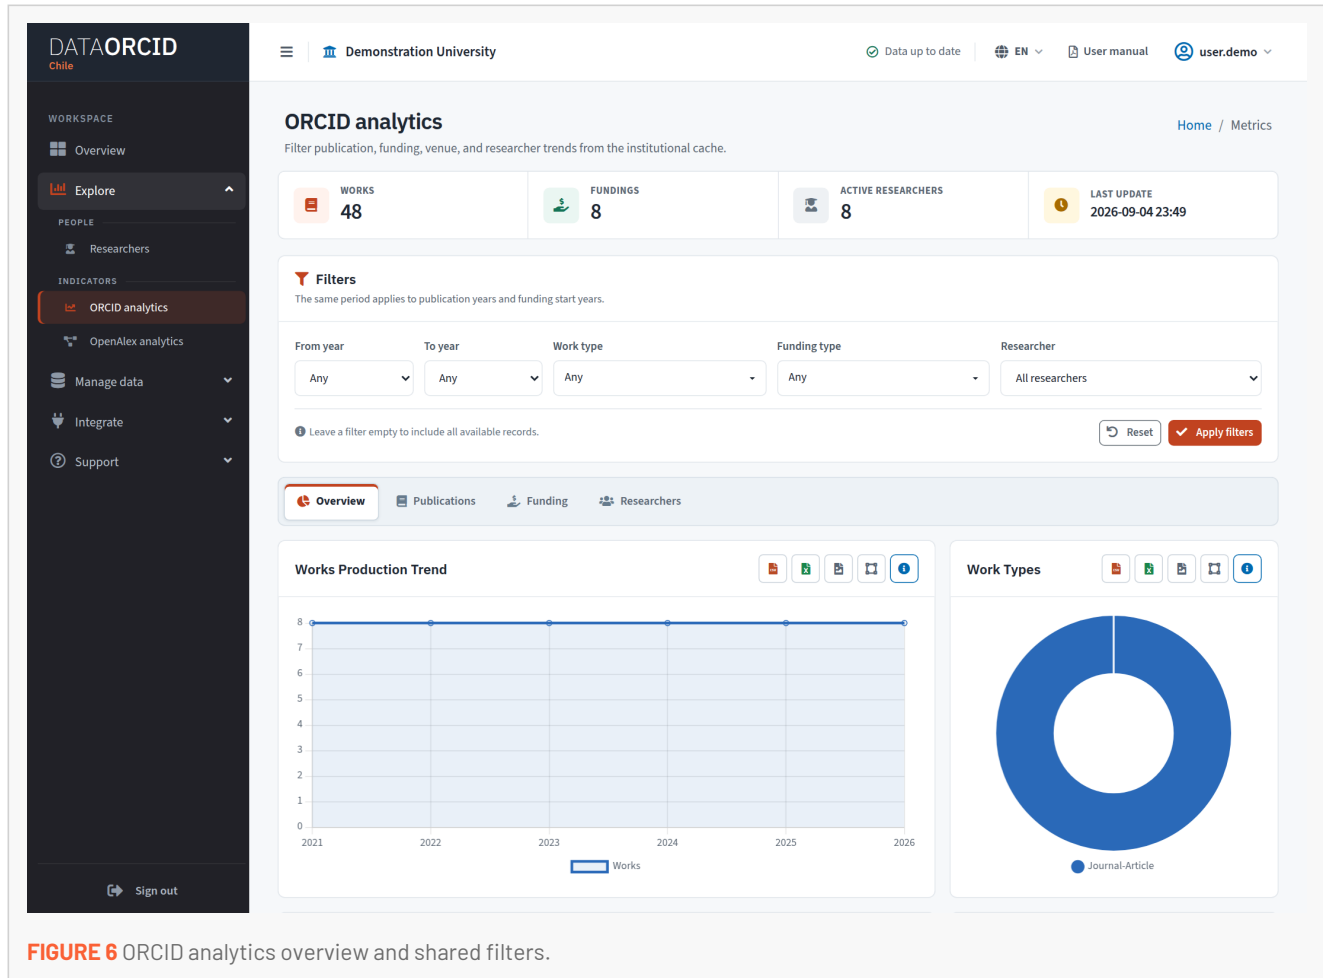

3.4.1 Publications

Publications shows annual trends, work types, and leading journals or sources. Indicators use ORCID records within the institutional scope and active filters.

Use the period filter to narrow the query and the work type filter to compare equivalent sets. Before adding a chart to a report, retain its retrieval date and the criteria used.

A work may appear in more than one ORCID profile. A sum of records therefore does not necessarily represent unique institutional publications.

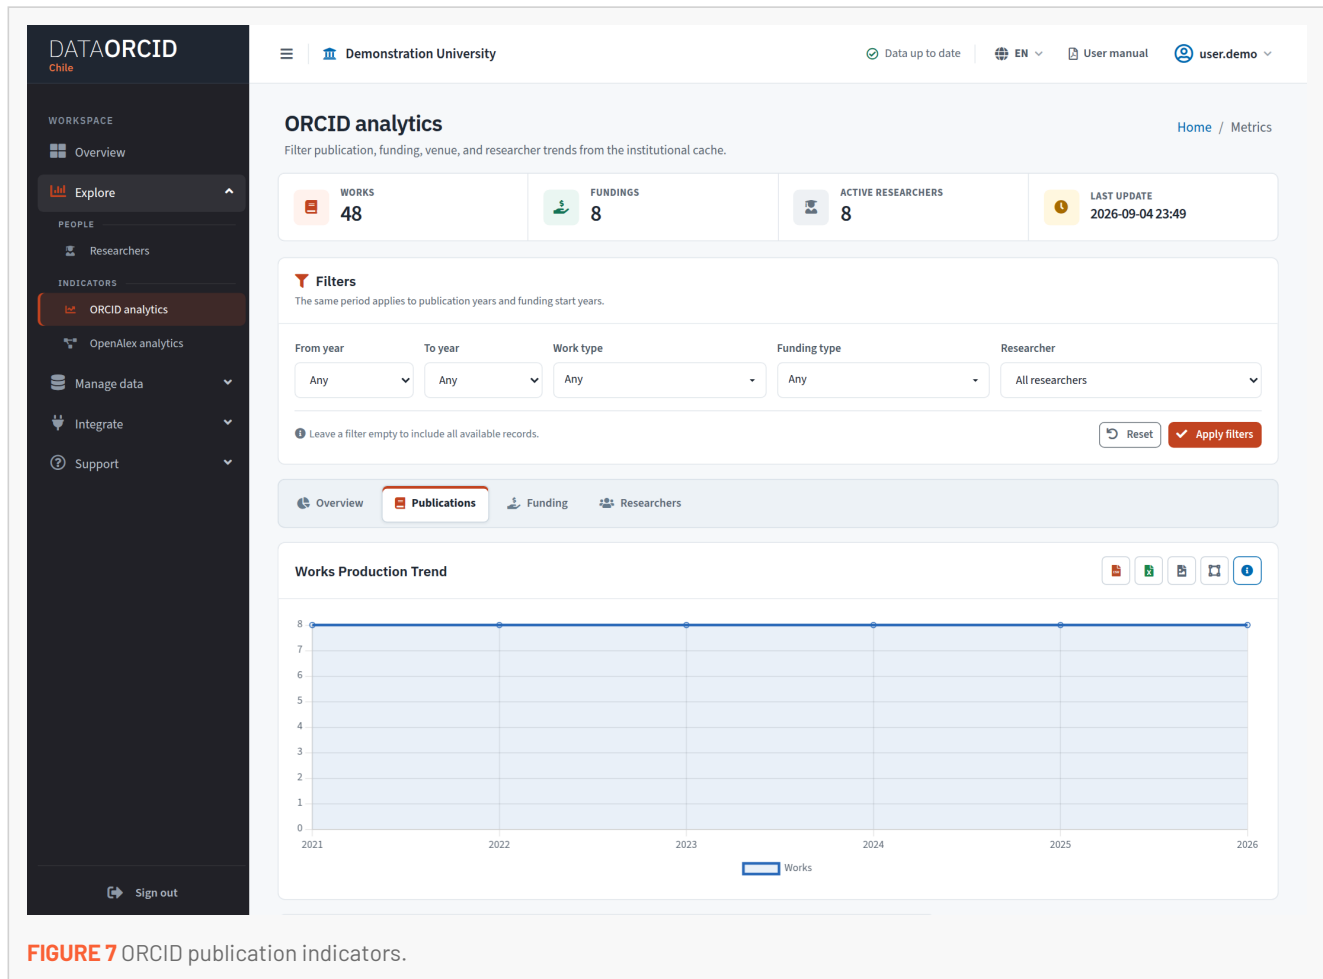



FIGURE 7 ORCID publication indicators.

3.4.2 Funding

Funding groups records by start year, type, and funding organization. Combine period, funding type, and researcher filters to review declared activity.

The data comes from public ORCID records. Missing amounts, currencies, or project numbers describe gaps in the available information.

A work and funding record appearing in the same person's profile do not establish that the project funded that publication. Interpret these tables and charts as context for recorded activity.

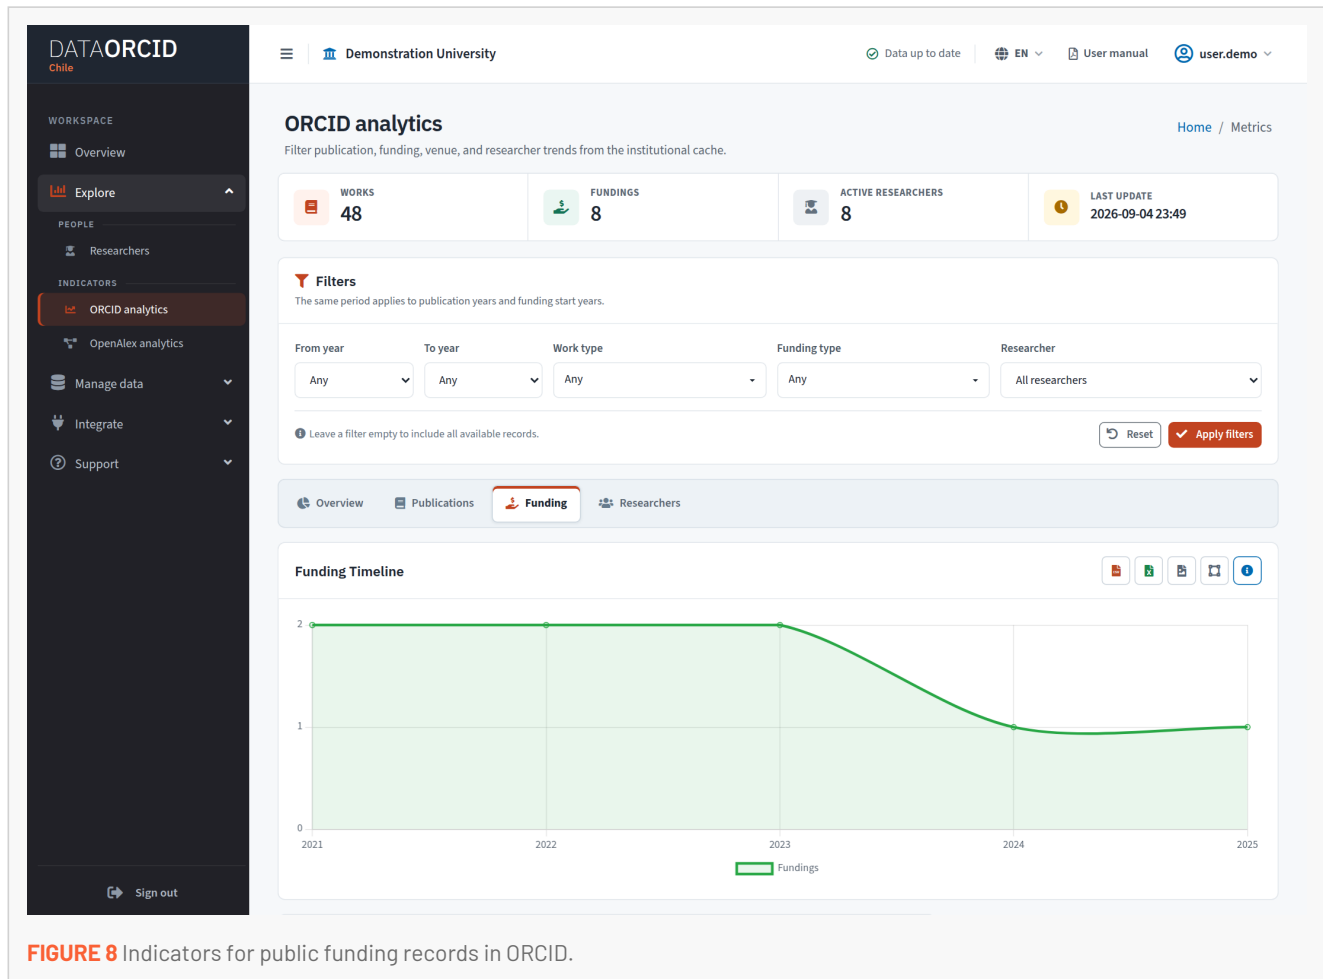


3.4.3 Researchers

Researchers identifies people with the most work or funding records in the filtered set. Names and ORCID iDs provide access to individual portfolios, and the lists can be exported.

A position in these lists reflects recorded activity and its coverage. It is not a comprehensive performance assessment and may not include a person's entire output.

To verify a result, retain the period and filters, open the portfolio, and compare the information with the public source record.

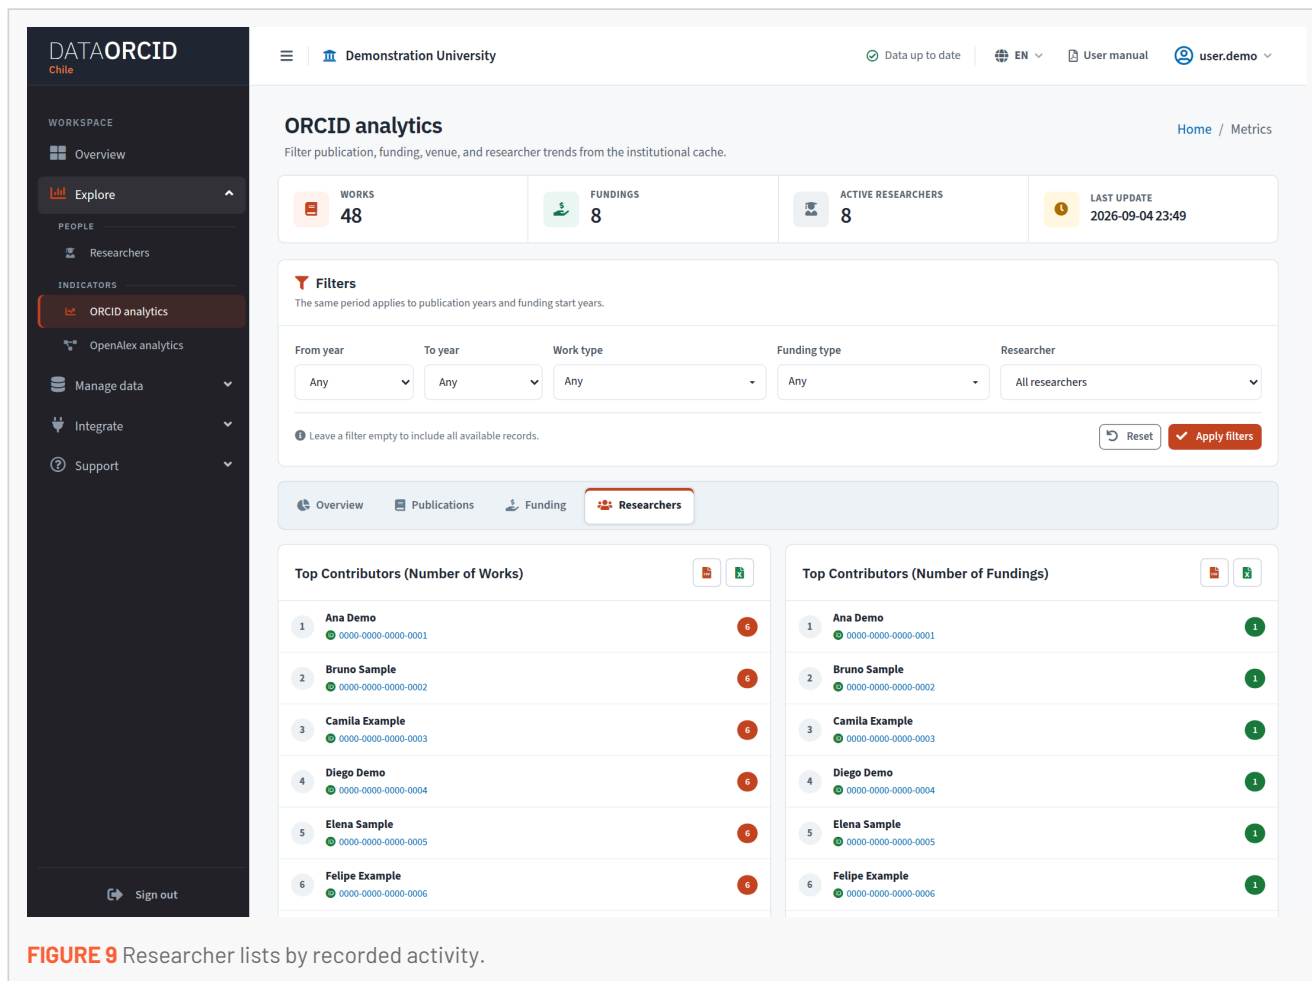

4. Manage data

4.1 Synchronization and downloads

For User and OAI User, this page is a status monitor and download center. It shows the freshness of works, funding, profiles, and OpenAlex metadata, together with the latest available run.

Institutional downloads include ORCID works, funding, researchers, and OpenAlex enrichment, according to dataset availability. Files reflect the cache state indicated on the page.

These roles inspect status and download available data. If an institutional synchronization is needed or a failed run appears, ask the responsible team to review it.

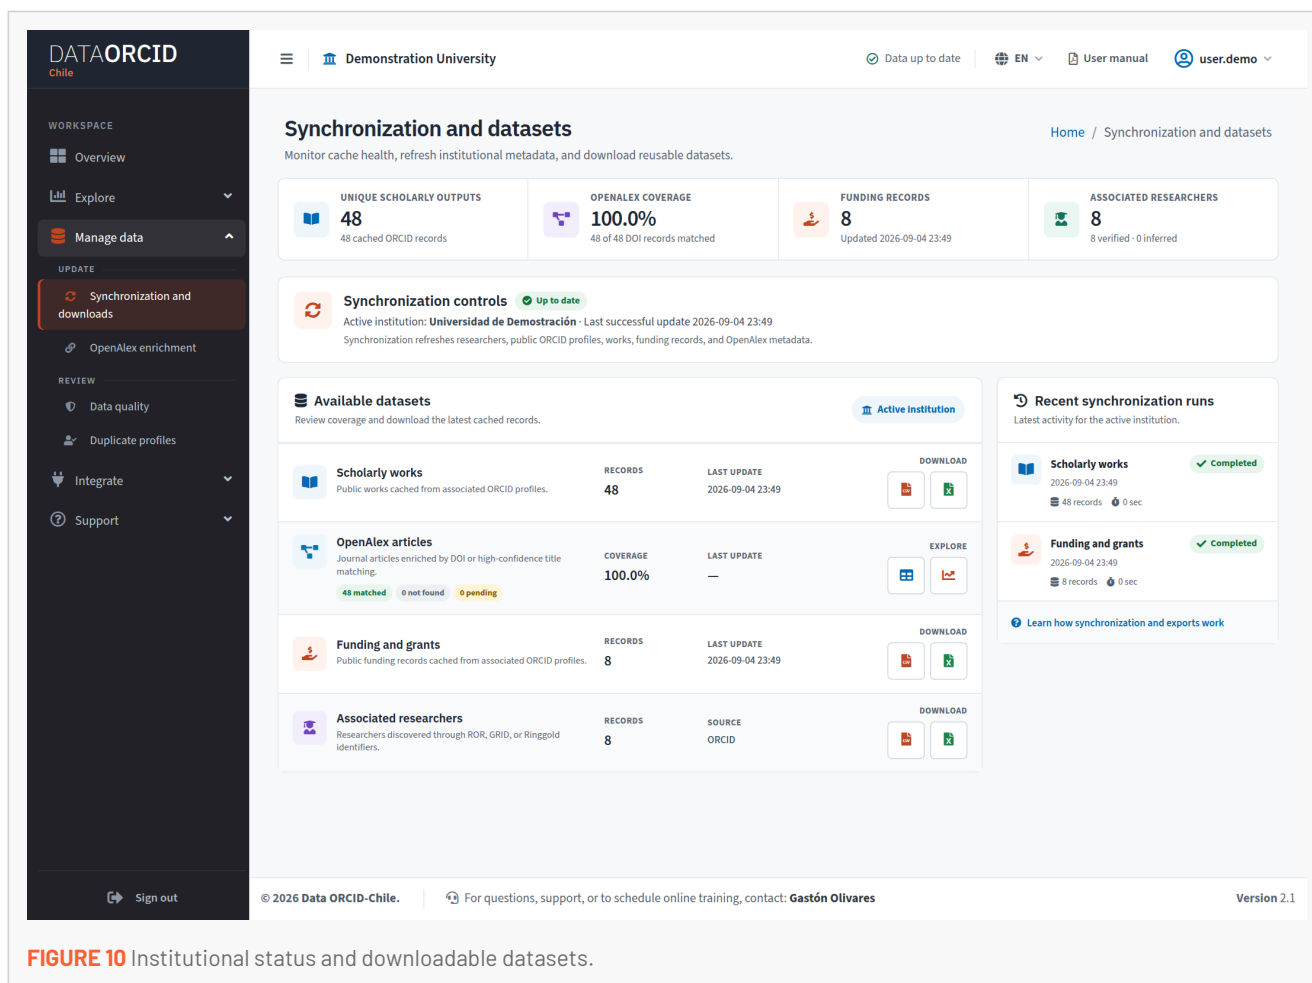


FIGURE 10 Institutional status and downloadable datasets.

4.2 Background exports

Large CSV and Excel downloads are prepared in the background. The floating Exports center shows waiting status, progress, and a private link when the file is ready. You can continue navigating within the platform.

An equivalent request may reuse a file that is still valid. If source data changes, a new export is prepared. Files have a limited lifetime; request an expired file again from its source view.

Delete all removes your completed exports and their files. Queued or running jobs are preserved. Closing or minimizing a notification only changes its display.

The screenshot displays the 'Researcher directory' page in the DATA ORCID Chile application. The left sidebar contains navigation options like 'Overview', 'Explore', 'People', 'Indicators', 'Manage data', 'Integrate', and 'Support'. The main content area shows a summary of researchers (8), managed by AM (4), profiles with names (8), and verified associations (8). Below this is a search bar and filters for 'Affiliation Manager' and 'Relationship evidence'. A table lists researchers with columns for name, affiliation, relationship evidence, works, and fundings. A floating 'Exports' notification is visible in the bottom right corner, indicating that the 'Researcher directory' file is ready for download (8 records, 5.3 KB).

FIGURE 11 Floating center with a demonstration export ready to download.

- 1 Apply the filters and sorting you need.
- 2 Select CSV or Excel and check the floating notification.
- 3 When it is ready, select Download file.
- 4 Keep the file with the query date, institutional scope, and filters.

4.3 Data quality

Data quality separates four perspectives: Overview, Researcher evidence, Funding context, and Technical integrity. It reports DOI and year coverage, funding completeness, verified or inferred relationships, and OpenAlex consistency.

Percentages describe available fields. An absence is a coverage gap and should not automatically be interpreted as a system error.

Use these views to document a report's limitations and locate records that need review. If you identify an inconsistency, record the relevant module and identifier and report it to the responsible team.

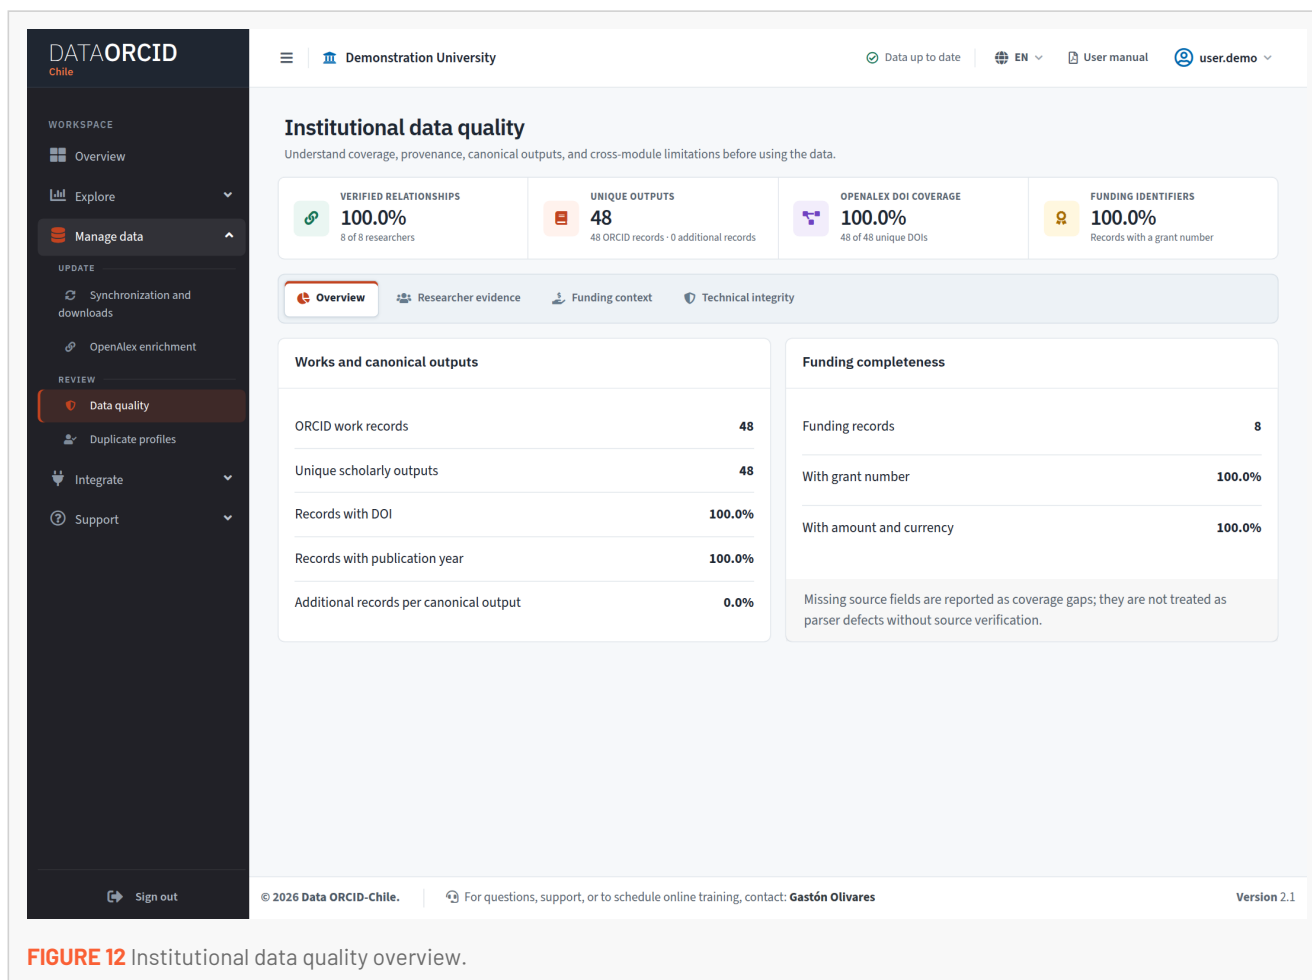


FIGURE 12 Institutional data quality overview.

4.4 Duplicate profiles

This module identifies algorithmic candidates that may represent multiple ORCID iDs for one person. You can search, filter by confidence or status, switch between available views, read the methodology, refresh the analysis, and export results.

User and OAI User inspect candidates and their evidence. A candidate does not confirm a duplicate, and refreshing the analysis does not merge or modify ORCID records.

Compare names, identifiers, and available evidence before reporting a case. A name match alone does not establish that two records belong to the same person.

DATA ORCID Chile

Workspace

- Overview
- Explore
- Manage data

Update

- Synchronization and downloads
- OpenAlex enrichment

Review

- Data quality
- Duplicate profiles**
- Integrate
- Support

Sign out

Demonstration University

Data up to date | EN | User manual | user.demo

Quality and duplicate profiles

Review potential duplicate ORCID records and the evidence behind each candidate group.

Home / Duplicate Profiles

CANDIDATE GROUPS	PROFILES INVOLVED	HIGH-CONFIDENCE GROUPS	CASES REQUIRING ACTION
0	0	0	0

Review workspace

Reused Generated at: 2026-09-04 23:49

Search: Name, ORCID ID, or institution Minimum Confidence: Any Case status: Open cases Apply

Candidates Researchers Institutions

Currently, no duplicate profiles are found for Universidad de Demostración.

© 2026 Data ORCID-Chile. For questions, support, or to schedule online training, contact: Gastón Olivares Version 2.1

FIGURE 13 Review of possible duplicate profiles.

4.5 OpenAlex enrichment

The enrichment review classifies articles as matched, pending, not found, error, or without DOI. You can search by title, DOI, ORCID iD, source, or topic, sort results, change page size, and expand row details.

Exports preserve the dataset filters. The Analytics link opens aggregate analysis. Coverage uses eligible ORCID articles, rather than all possible institutional output, as its basis.

Matching prioritizes DOI. Some records may be linked through a conservative comparison of title, year, and type. An unmatched record still exists in ORCID even if it contributes no enriched metadata.

DATA ORCID Chile

Workspace: Overview, Explore, Manage data, UPDATE: Synchronization and downloads, OpenAlex enrichment, REVIEW: Data quality, Duplicate profiles, Integrate, Support

OpenAlex enrichment
Find articles, review enrichment status, and open metadata only when you need it.

Home / OpenAlex Enrichment

JOURNAL ARTICLES 48
ORCID cache

OPENALEX COVERAGE 48 / 48
100.0% matched

OPEN ACCESS WORKS 39
matched articles

OPENALEX CITATIONS 3528
citation total

Article review
Last OpenAlex sync: Not available

Analytics, Export, Print

Matched 48, Pending DOI 0, Not found / errors 0, Without DOI 0

Search articles: Title, DOI, ORCID ID, source, or topic. Sort by: Citations. Rows: 10. Apply

Articles
Open a row to view DOI, topic, and ORCID details. Showing 1–10 of 48

ARTICLE	STATUS	CITATIONS	SOURCE
Environmental monitoring and open infrastructure — study 48 2026 · Research Data Journal	✓ Matched @ Gold	144	Research Data Journal
Digital repositories and metadata quality — study 47 2025 · Open Knowledge Review	✓ Matched @ Green	141	Open Knowledge Review
Biodiversity observation with reusable datasets — study 46 2024 · Demonstration Science	✓ Matched @ Diamond	138	Demonstration Science
Collaborative science and public knowledge — study 45 2023 · Research Data Journal	✓ Matched Closed	135	Research Data Journal
Sustainable water management in local communities — study 44 2022 · Open Knowledge Review	✓ Matched @ Hybrid	132	Open Knowledge Review
Open research metadata and institutional discovery — study 43	✓ Matched	130	Demonstration Science

FIGURE 14 Articles and OpenAlex enrichment states.


5. OpenAlex analytics

5.1 Filters, metrics, and exports

OpenAlex analytics supplements ORCID articles from your assigned institution with citations, open access, authorships, affiliations, topics, languages, sources, and FWCI. Check dataset coverage before interpreting results.

General filters include period, document type, open access, language, and affiliation. Visible metrics customizes the cards, and information buttons explain definitions and methods.

Charts offer PNG or SVG where the control is available. Tables offer CSV or Excel. In tables with search, sorting, and pagination, these criteria apply to the whole set, not only visible rows.

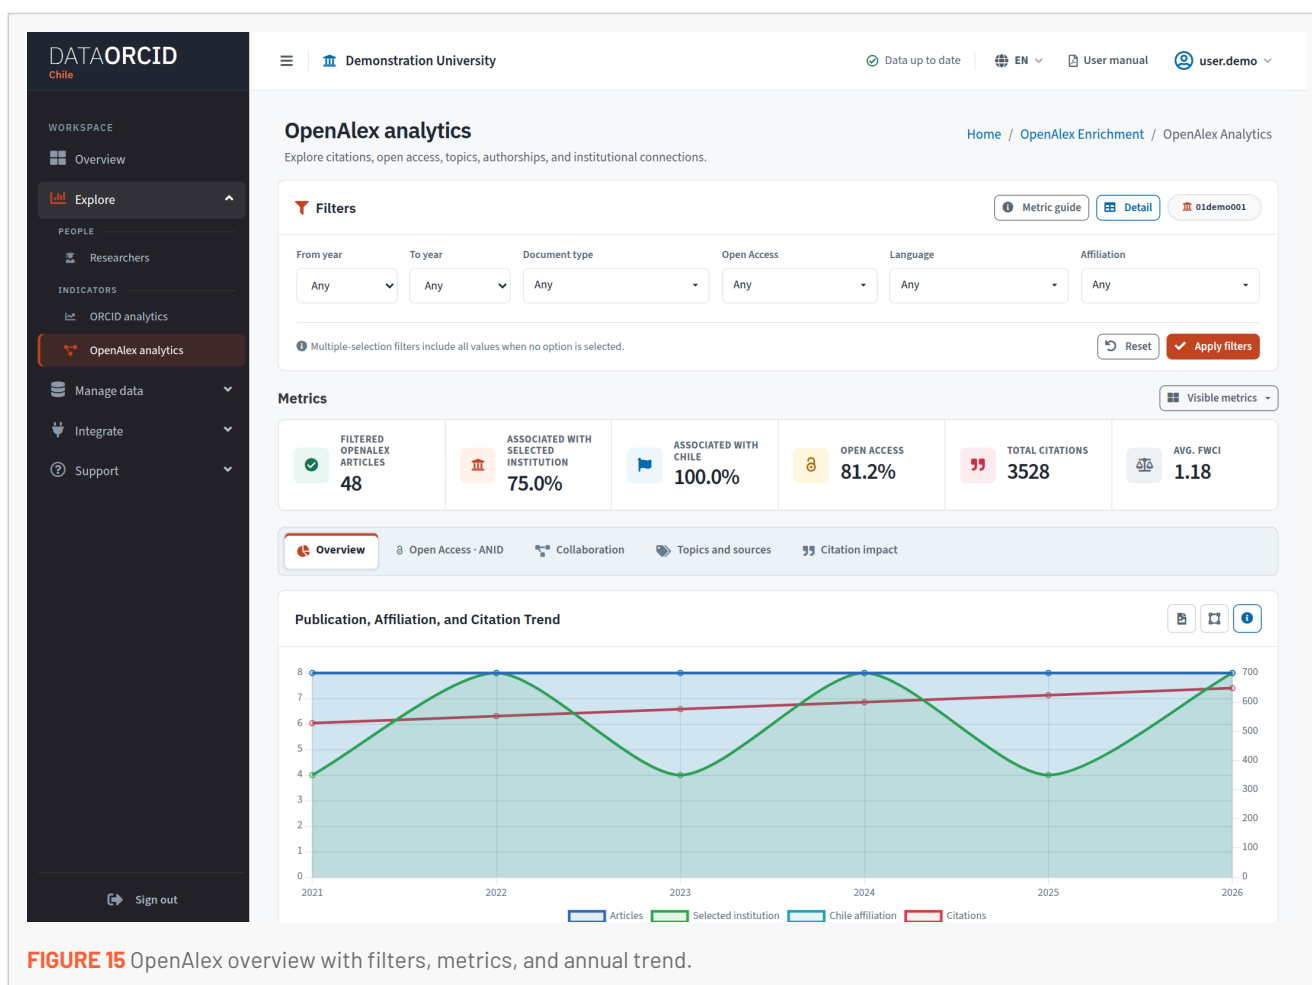


5.2 Open Access · ANID

This section presents output, citations, sources, and trends for Diamond OA and Green OA articles matching the active filters. Categories correspond to the open-access status recorded by OpenAlex.

The categories are mutually exclusive according to that status. Each group's percentage uses all enriched articles matching the filters as its denominator, not only open-access articles.

Visualizations show trends, composition, and journals with the most output or citations. Use internal vertical scrolling to explore categories in long charts.

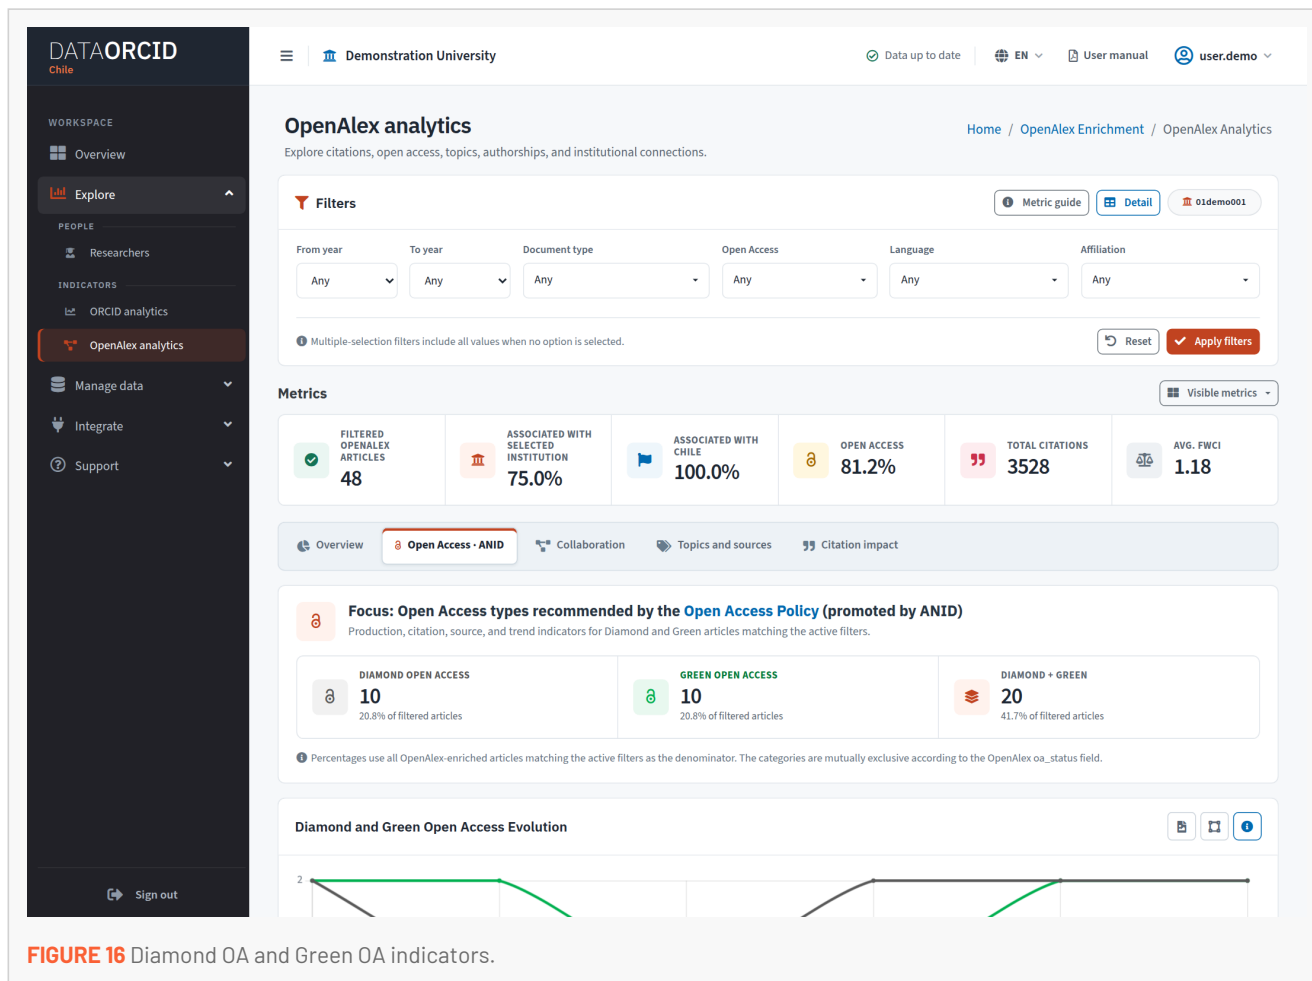

IMPORTANT

Green OA describes an article's repository availability. It does not mean the entire journal is green or independently certify policy compliance.

5.2.1 Open-access tables

Journal and most-cited article tables provide search, column sorting, page size, pagination, and export. Results respect the page's general filters.

To review a source, search its name and sort by output or citations. To identify articles, use the relevant table and check DOI, year, and open-access status.

Retain the denominator and retrieval date when reporting a percentage. A change may reflect the period, filters, an OpenAlex update, or increased matching coverage.

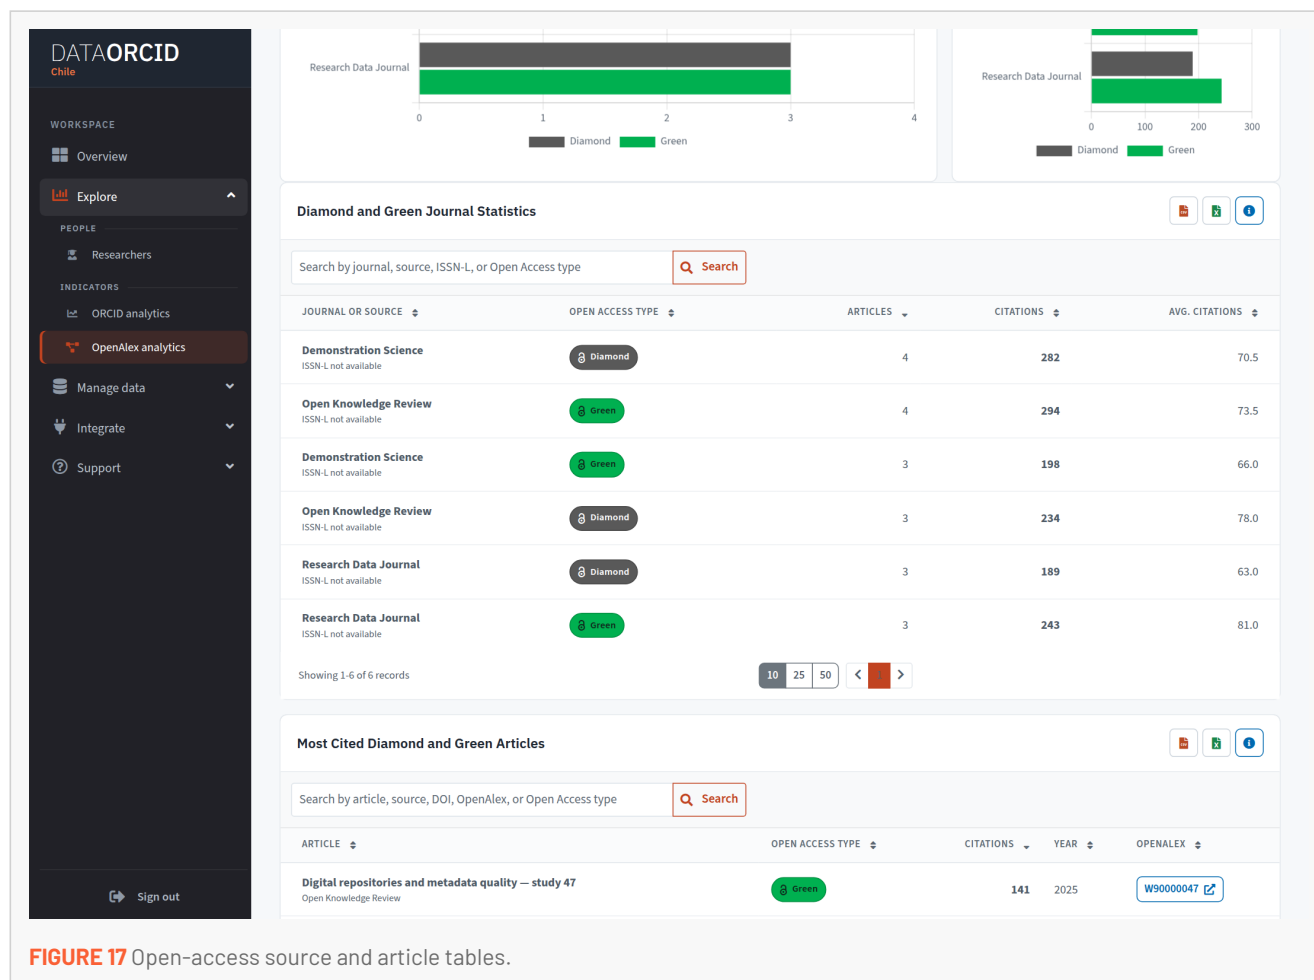



FIGURE 17 Open-access source and article tables.

5.3 Collaboration

Collaboration shows authors with Chilean affiliations and countries and institutions present in OpenAlex authorships. These views describe affiliations on enriched articles included by the filters.

One article may count in several countries or institutions. Category totals can therefore exceed the article count. An affiliation recorded on a work also does not establish a current employment relationship.

Use each chart's information control to check the method and export its data to document collaboration. These views are not a census of every ORCID profile at the institution.

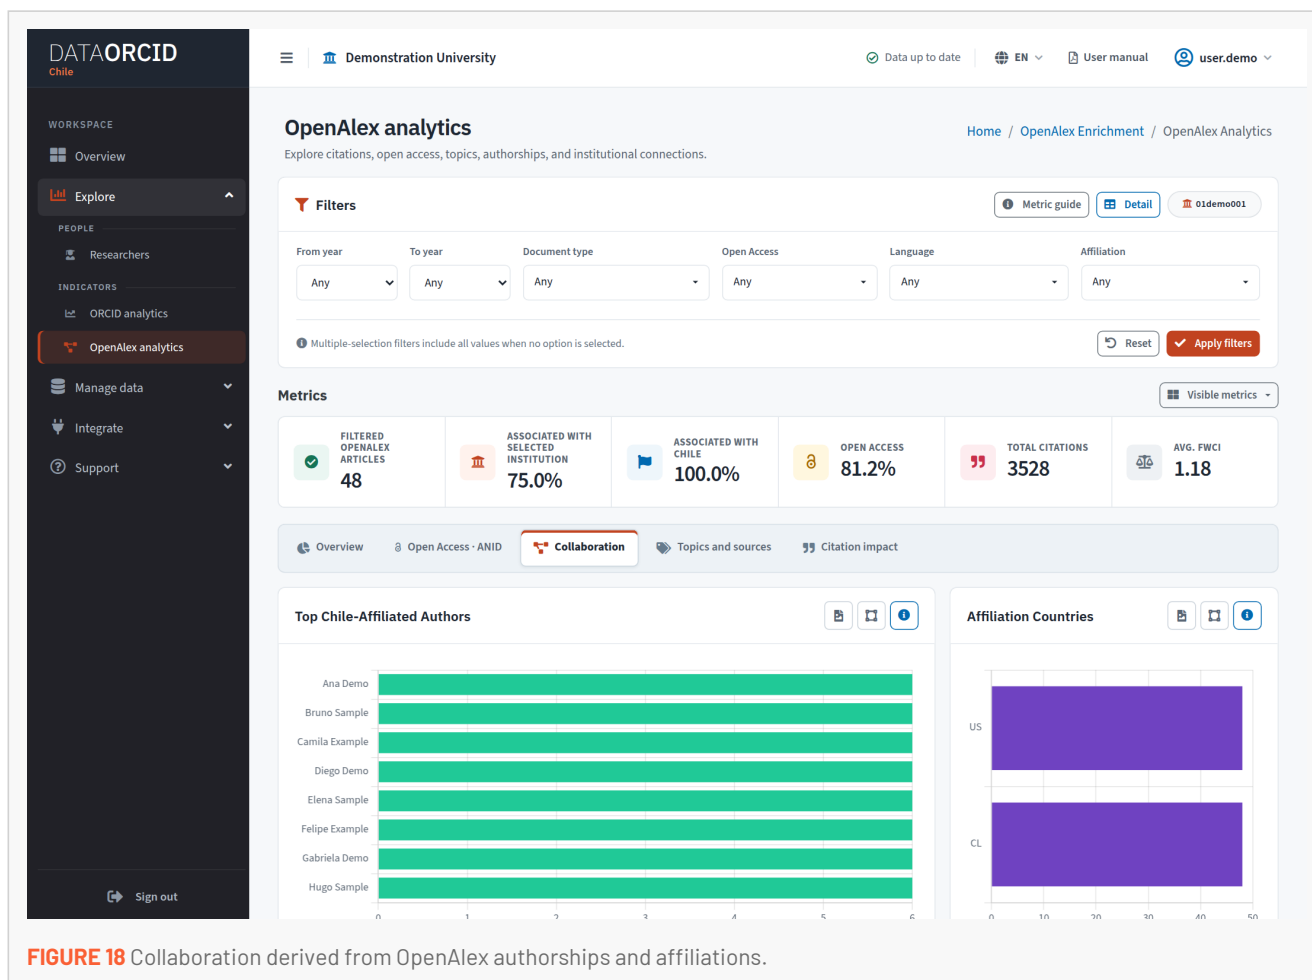


5.4 Topics and sources

This section distributes articles by thematic domains and fields, document type, open access, language, and source. Topics come from OpenAlex classification.

Languages are displayed with localized names based on the available codes. Missing values are grouped as unknown; that category should not be interpreted as an additional language or discipline.

Use filters to review a specific period or set and export tables or charts. The distribution describes the enriched articles available, not all disciplinary activity at the institution.

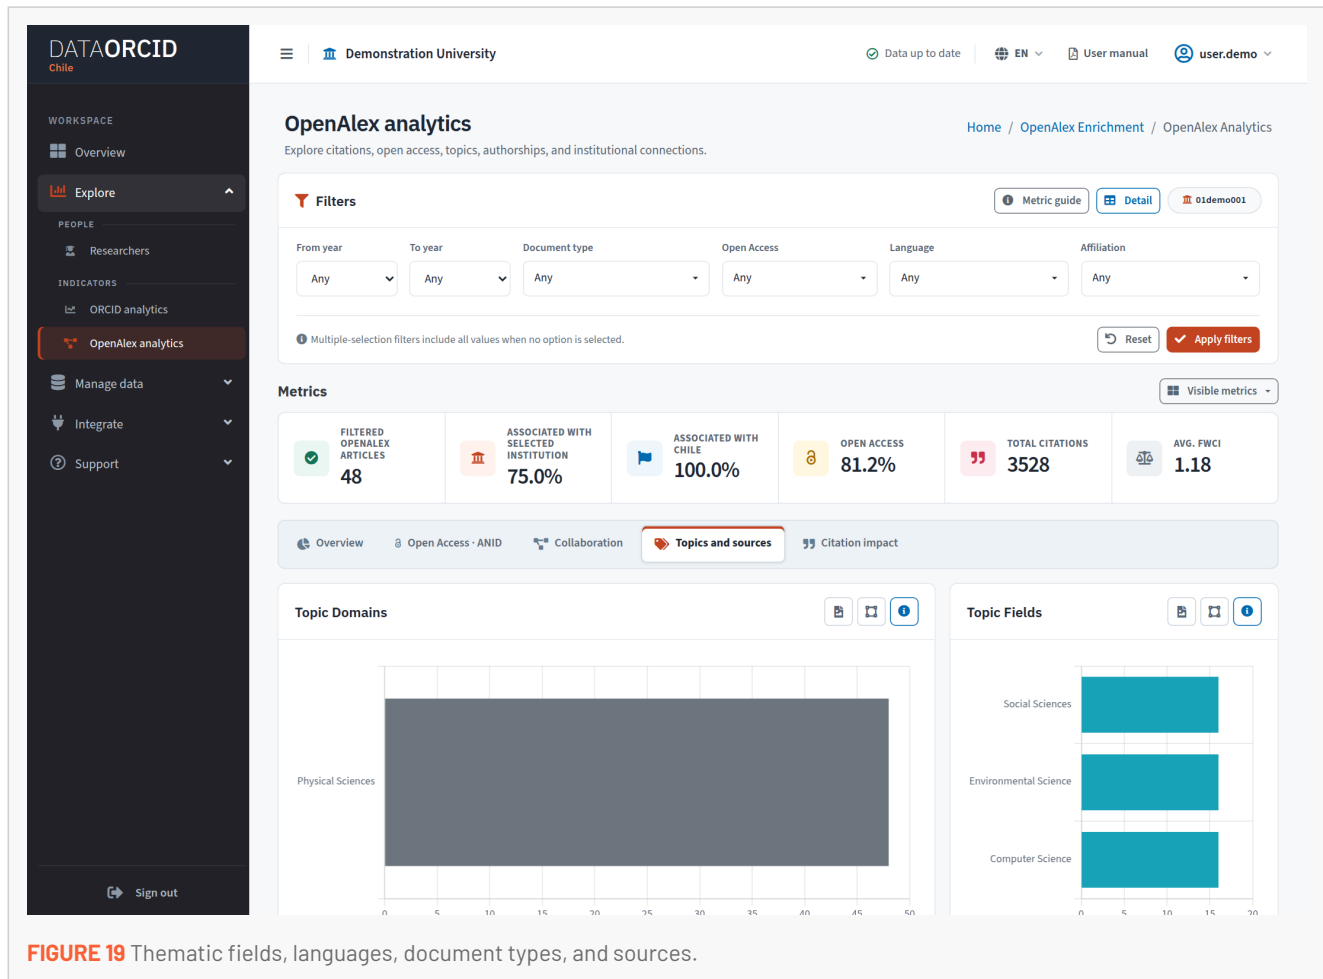


5.5 Citation impact

Citation impact ranks filtered articles by their current OpenAlex citation count. Totals may change after later updates. Check DOI, year, and source when comparing publications.

The citation trend groups that current count by publication year. It does not represent citations received during each calendar year.

FWCI provides an impact measure normalized by field, year, and document type where OpenAlex supplies a value. A missing value is not zero. Read the metric definition before using it in a report.

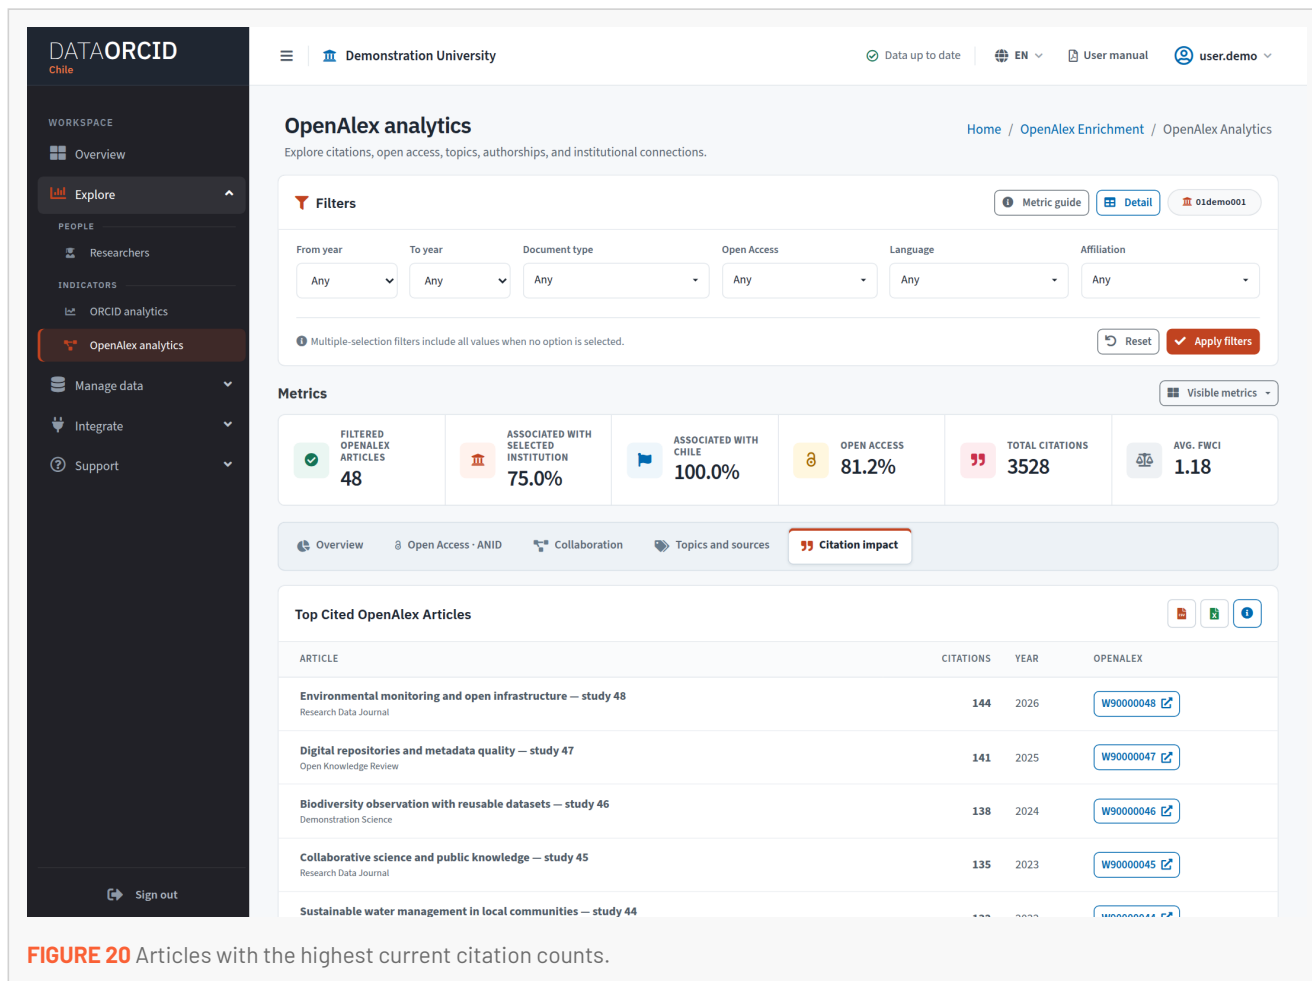

6. Integrate

6.1 Read from the ORCID API

Read from the API contains cURL search examples by institution, ROR, name, and country, plus a reference to public endpoints and trial links. It is intended for people who need to query the source with a technical tool.

Choose the relevant example, review its parameters, and replace sample values before running it in your environment. Queries retrieve publicly visible data.

The guide explains how to read ORCID. It does not run a synchronization of your entire institution or grant access to private records.

DATA ORCID Chile

Workspace: Overview, Explore, Manage data, Integrate, ORCID, Write to ORCID, Affiliation Manager, Repositories, OAI-PMH publishing, Support

Read from the ORCID API

Query public ORCID metadata and understand the available read endpoints.

Introduction for Developers

The ORCID Public API allows any system to **retrieve public researcher data**. It works over HTTP using standard REST methods. You only need the **ORCID ID** to start pulling information.

Quick Tip
Always include the Accept header to receive data in JSON format, which is easier to parse than the default XML.
Example ORCID used: **0000-0003-3655-7831**

BASE URL
`https://pub.orcid.org/v3.0/`

MANDATORY HEADER
Accept: application/json

Step 1: Advanced Search Examples (cURL)

SEARCH BY INSTITUTION (ANID)
Search for researchers associated with ANID Chile.

```
curl -H "Accept: application/json" \
  "https://pub.orcid.org/v3.0/search/?q=affiliation-org-name:ANID"
```

SEARCH BY ROR IDENTIFIER
Searching for the ROR string within the organization fields.

```
curl -H "Accept: application/json" \
  "https://pub.orcid.org/v3.0/search/?q=%K22ror.org/02ap3w078%22"
```

SEARCH BY NAME & COUNTRY

```
curl -H "Accept: application/json" \
  "https://pub.orcid.org/v3.0/search/?q=given-names:Gaston%20Olivares"
```

Step 2: Complete API Endpoint Reference

ENDPOINT SUB-PATH	INFORMATION RETURNED	LIVE JSON LINK
GLOBAL RECORDS		

FIGURE 21 Guide to querying the public ORCID API.

6.2 Write to ORCID

Write to ORCID documents a downloadable project, its requirements, configuration, CSV structure, and authorization flow. It explains how an authorized integration adds information to a record.

Read the project instructions and coordinate its use with the institutional team responsible for ORCID. A DATA ORCID CHILE account does not replace the credentials and authorizations required by ORCID.

Writing to a record requires appropriate credentials and explicit authorization from the ORCID iD holder. Do not include secrets, passwords, or tokens in spreadsheets or support requests.

The screenshot displays the 'Write to ORCID' guide on the DATA ORCID Chile website. The left sidebar contains navigation links for Workspace, Overview, Explore, Manage data, Integrate, ORCID (Read from the API, Write to ORCID, Affiliation Manager), and Repositories (OAI-PMH publishing, Support). The main content area is titled 'Write to ORCID' and includes an introduction, prerequisites, a ready-to-use project download, safe email testing instructions, and installation & execution steps.

Write to ORCID
Implement authorization and write trusted institutional metadata to researcher records.

Introduction
This guide provides a functional boilerplate to implement the **OAuth2 3-legged flow**. This process is essential for obtaining persistent permissions from researchers, allowing your institution to push **funding (grants)** records directly to their ORCID profiles.

Ready-to-use Project
The ZIP includes the Flask application, database models, requirements.txt, and a template .env file.
[Download project.zip](#)

Prerequisites

- Python 3.10+
- ORCID Member API Keys
- Sandbox Account
- Ethereal Mail (for testing)

This guide is designed for local testing using the ORCID Sandbox environment.

Safe Email Testing with Ethereal
To send authorization invites without using a real institutional mail server, we use **Ethereal Mail**. It is a fake SMTP service where messages are "caught" and displayed in a web dashboard instead of being sent to real inboxes.

- Go to [ethereal.email](#) and click on "Create Ethereal Account".
- Copy the generated **User** and **Password**.
- Paste them into your **.env** file (see Step 3 below).

NO REAL SPAM
Safe for development

Installation & Execution

1. ENVIRONMENT SETUP

```
python3 -m venv .venv
source .venv/bin/activate # Windows: .venv\Scripts\activate
pip install -r requirements.txt
```

2. CONFIGURATION (.ENV)

```
# ORCID Sandbox Credentials
ORCID_CLIENT_ID=APP-XXXX
ORCID_CLIENT_SECRET=YYYY-ZZZZ

# Ethereal SMTP Settings
SMTP_SERVER=smtp.ethereal.email
```

FIGURE 22 Guide and reference project for writing to ORCID.

6.3 Affiliation Manager

This option stores the Client ID of the institutional Affiliation Manager application in your account. The value usually begins with APP- and helps identify records managed through that application.

Confirm the correct institutional value before editing, enter it in the field, and save. It is not a password, secret, or API key.

The identifier helps interpret managed-record status. Saving it does not itself grant permission to write to someone's ORCID iD.

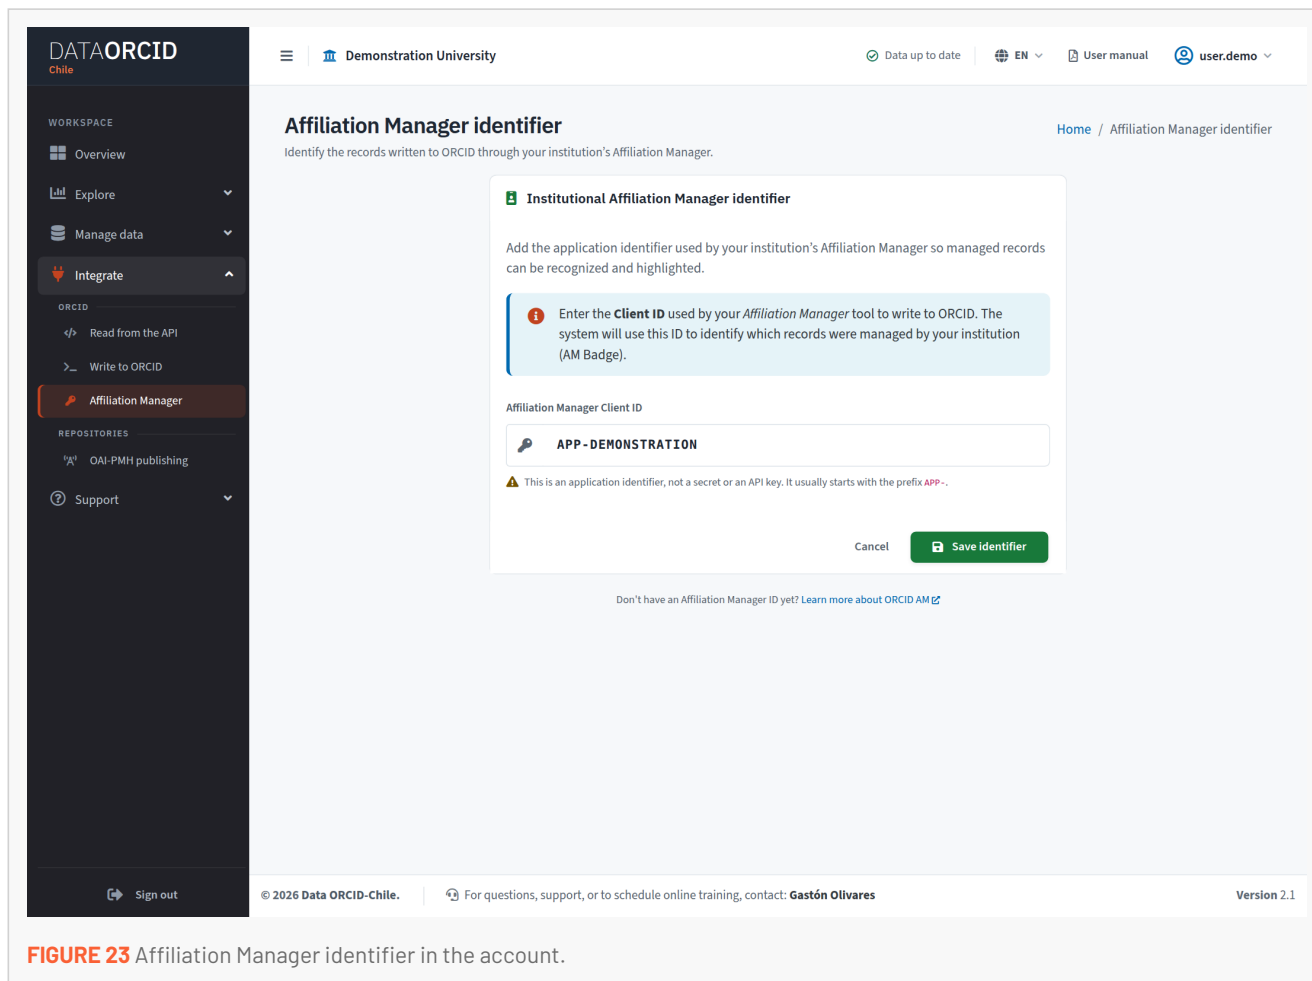


FIGURE 23 Affiliation Manager identifier in the account.



IMPORTANT

Change this value only if you know the correct Client ID or have instructions from the team responsible for ORCID.

6.4 ORCID resources

ORCID resources appears under Support and collects links about membership, API credentials, Affiliation Manager, CSV templates, and integrations with platforms such as OJS, DSpace-CRIS, VIVO, and Dataverse.

Choose the resource for your task: understanding an integration, preparing a template, or reading documentation. External links open outside DATA ORCID CHILE and may have their own access requirements.

For questions about this platform's functions, start with the Help center, which adapts its content to the enabled modules.

DATA ORCID Chile

Workspace

- Overview
- Explore
- Manage data
- Integrate
- Support**
- Help center
- ORCID resources**

Sign out

Demonstration University

Data up to date | EN | User manual | user.demo

ORCID resources

Consortium guidance, Member Portal roles, credentials, and external integration resources.

Home / Resources

Why be an ORCID Consortium Member?

Membership is not just about a technical ID; it is about institutional visibility and data control in the global research ecosystem.

- Data Integrity**
Assert your institution name on researcher records to prevent name ambiguity and fragmentation.
- Automatic Updates**
Automatically push information to profiles, saving researchers time in manual reporting.
- Institutional Insight**
Access the Member Portal to get advanced statistics and manage institutional affiliations.

ORCID Member Portal Roles

The Member Portal is your administrative hub. Designating these roles ensures smooth communication with ORCID and CINCEL.

ROLE	DESCRIPTION & RESPONSIBILITIES	STATUS
Agreement Signatory	The legal authority authorized to sign formal agreements on behalf of the institution.	Official
Main Relationship Contact	Primary institutional contact for general notifications and consortium coordination.	Official
Voting Contact	Authorized to cast institutional ballots in ORCID board elections and policy decisions.	Required
Technical Contact	Primary contact for API implementation, client credentials, and technical alerts.	Required
Invoice Contact	Person or department responsible for receiving and processing membership billing.	Finance
Comms Contact	Receives community newsletters, outreach materials, and marketing updates.	
Product Contact	Receives information about new ORCID features and beta testing opportunities.	

[Access Portal](#)

FIGURE 24 ORCID resources and documentation under Support.

6.5 OAI-PMH publishing

OAI-PMH publishing lets you review the institutional repository from which other systems can harvest metadata for selected articles. Tabs organize the overview, articles, metadata mapping, DOI imports, and harvesting access.

User can inspect available content. OAI User can also expose or exclude articles, import DOI decisions, undo the latest active import, customize the dataorcid format, and manage private harvesting URLs.

The overview shows available articles, OpenAlex-validated articles, exposed articles, and articles not exposed. Validation requires an OpenAlex affiliation matching the active ROR. The default policy and manual decisions determine the effective selection.

If the provider is disabled or unconfigured, ask the responsible team to enable it. A selected article is available while the provider is enabled and the requested URL has access.

The screenshot displays the 'OAI-PMH provider' overview in the DATAORCID Chile interface. The left sidebar shows the navigation menu with 'Integrate' and 'OAI-PMH publishing' highlighted. The main content area is titled 'Institutional interoperability OAI-PMH provider' and includes a status indicator 'Public provider enabled'. Below this, the 'Repository workspace' section shows a progress bar with five steps: Initial configuration (current), Article selection, Metadata configuration, Bulk DOI activation, and Harvesting access. A summary section provides statistics: 48 available articles, 36 validated by OpenAlex, 36 exposed through OAI, and 12 not exposed. The 'Publication settings' section shows the default policy as 'OpenAlex-validated articles' and the provider as 'Enabled'. The 'Generated public endpoint' section displays the OAI-PMH base URL and provides buttons for 'Identify', 'oai_dc', 'oai_openaire', and 'dataorcid'.

DATAORCID Chile

WORKSPACE

- Overview
- Explore
- Manage data
- Integrate

ORCID

- Read from the API
- Write to ORCID
- Affiliation Manager

REPOSITORIES

- OAI-PMH publishing
- Support

Demonstration University

Data up to date | EN | User manual | oai.demo

Institutional interoperability

OAI-PMH provider

Public provider enabled

Publish selected DataORCID-Chile articles so DSpace and other external repositories can harvest them.

Universidad de Demostración

ROR: 01demo001

Only articles linked to this institution can be exposed.

Repository workspace

Choose an area to continue. Your institutional context is preserved.

5 sections

- Initial configuration** (01)
Define the repository, publication policy, and public endpoint.
Current section
- Article selection** (02)
Review which institutional works are exposed for harvesting.
- Metadata configuration** (03)
Test formats and customize the DataORCID metadata mapping.
- Bulk DOI activation** (04)
Validate an XLSX file and audit every activation import.
- Harvesting access** (05)
Register repositories and manage their private URLs.

Available articles

48

Public, deduplicated DataORCID works

Validated by OpenAlex

36

Affiliation matches the active ROR

Exposed through OAI

36

Automatic policy plus manual decisions

Not exposed

12

0 manual decisions

Publication settings

DataORCID-Chile is the source repository; no external source URL is required.

Default policy OpenAlex-validated articles

Provider Enabled

Only institutional managers and administrators can change publication settings.

Generated public endpoint Enabled

Give this automatically generated, unguessable URL to DSpace. It exposes only the effective article selection for this institution.

OAI-PMH base URL

`https://dataorcid.example.org/oai/demonstration-key-not-a-l`

Identify | oai_dc | oai_openaire | dataorcid

FIGURE 25 OAI-PMH overview available to OAI User.

6.6 OAI-PMH article selection

The table supports search and filters for OAI status, affiliation validation, document type, and activation origin. You can sort by the available columns and export the filtered selection for review.

With OAI User, Expose or Exclude changes an individual article. For multiple articles, mark their rows and use Expose selected or Exclude selected. Select this page marks only rows on the current page.

Manual decisions override the automatic policy. Excluding an article from OAI-PMH does not delete it from ORCID, OpenAlex, or the browsing cache.

DATA ORCID Chile

WORKSPACE

- Overview
- Explore
- Manage data
- Integrate

ORCID

- Read from the API
- Write to ORCID
- Affiliation Manager

REPOSITORIES

- OAI-PMH publishing
- Support

OAI-PMH interoperability

Article selection

Choose exactly which institutional articles DSpace and other repositories are allowed to harvest.

Universidad de Demostración
ROR: 01demo001

Only articles linked to this institution can be exposed.

Repository workspace
Choose an area to continue. Your institutional context is preserved.

- Initial configuration
- Article selection** (Current section)
- Metadata configuration
- Bulk DOI activation
- Harvesting access

Institutional articles
Review affiliation evidence and define the effective OAI publication status.

Export all filtered results for auditing: CSV, XLSX

Search: Title, author, affiliation, ROR, ...

OAI publication status: All statuses

OpenAlex validation: All validation state

Document type: All types

Activation origin: All origins

Reset, Apply filters

Select this page: Expose selected, Exclude selected

ARTICLE	CREATORS	YEAR	TYPE	AFFILIATIONS	OPENALEX AFFILIATION	OAI STATUS	QUICK ACTION
Environmental monitoring and open infrastructure — study 48 10.0000/demo.048 Open article	Hugo Sample	2026	article	Partner Demo University ROR: 02demo002 Universidad de Demostración ROR: 01demo001 Includes selected institution	Validated Matches active ROR	Exposed	Exclude

FIGURE 26 Article selection with OAI User actions.

- 1 Filter and review DOI, title, and affiliations before selecting.
- 2 Apply the action to the intended rows and check their new status.
- 3 Inspect the enabled provider to review the published result.


6.7 Metadata formats and mapping

The provider offers three formats: oai_dc, oai_openaire, and dataorcid. The first two retain their standard structure. The editor customizes only the dataorcid format.

With OAI User, select a catalog field and choose Add field. You can change its destination name or hide it. Title and identifier are required; hidden fields are not emitted.

Save mapping applies your changes. Restore defaults returns to the initial profile when the control is available. User can inspect the mapping but cannot edit it.

The generated base URL and trial links let you inspect the enabled provider's response. Coordinate the required format with the metadata recipient. Mapping changes the published output, not the original ORCID data.

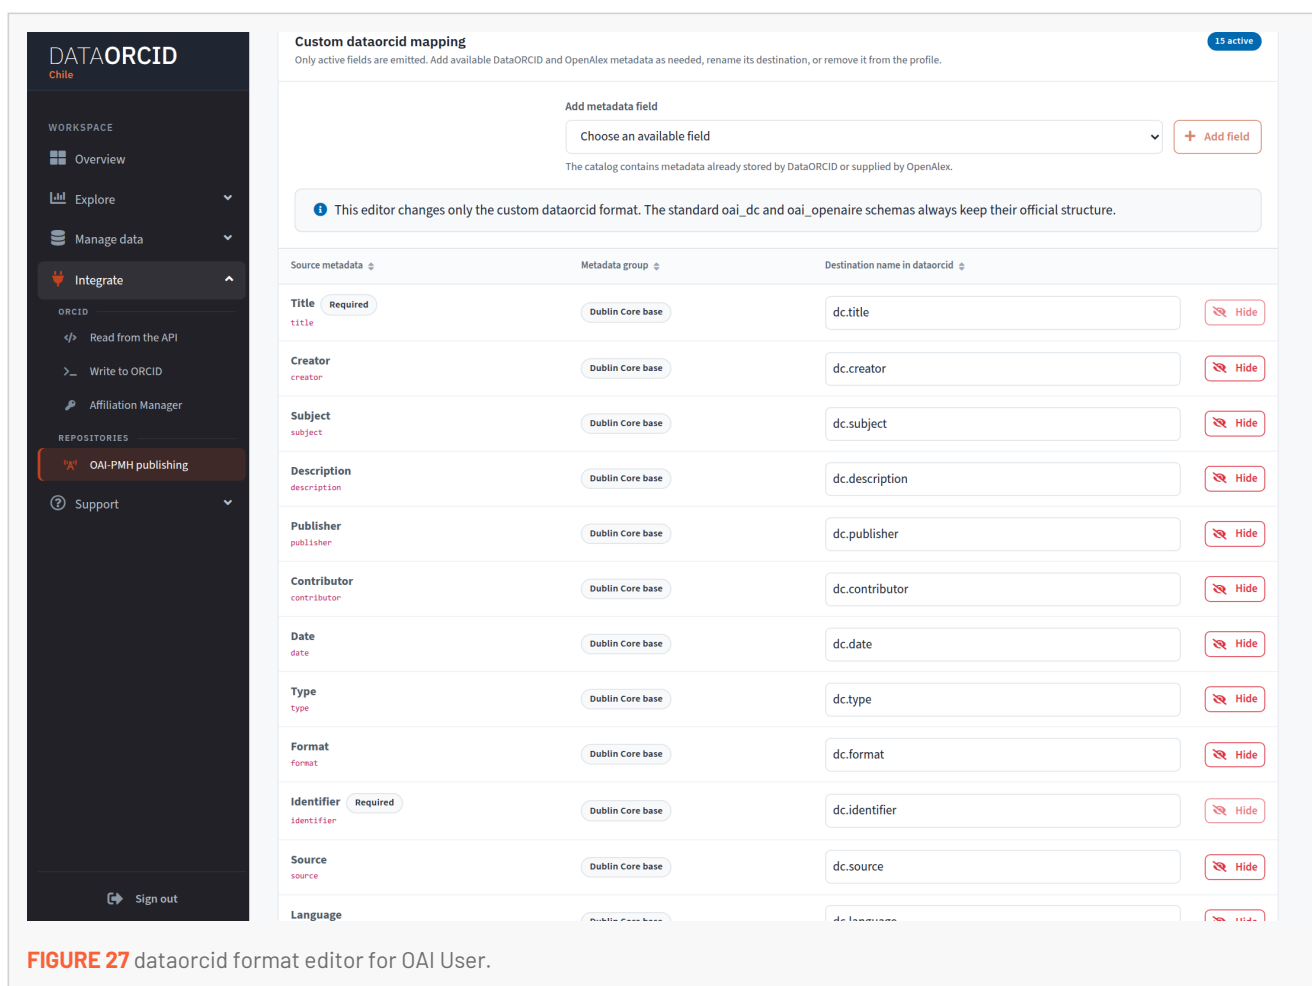

Custom dataorcid mapping 15 active

Only active fields are emitted. Add available DataORCID and OpenAlex metadata as needed, rename its destination, or remove it from the profile.

Add metadata field

Choose an available field + Add field

The catalog contains metadata already stored by DataORCID or supplied by OpenAlex.

Info This editor changes only the custom dataorcid format. The standard oai_dc and oai_openaire schemas always keep their official structure.

Source metadata	Metadata group	Destination name in dataorcid	
Title title	Dublin Core base	dc.title	Hide
Creator creator	Dublin Core base	dc.creator	Hide
Subject subject	Dublin Core base	dc.subject	Hide
Description description	Dublin Core base	dc.description	Hide
Publisher publisher	Dublin Core base	dc.publisher	Hide
Contributor contributor	Dublin Core base	dc.contributor	Hide
Date date	Dublin Core base	dc.date	Hide
Type type	Dublin Core base	dc.type	Hide
Format format	Dublin Core base	dc.format	Hide
Identifier Required identifier	Dublin Core base	dc.identifier	Hide
Source source	Dublin Core base	dc.source	Hide
Language	Dublin Core base	dc.language	Hide

FIGURE 27 dataorcid format editor for OAI User.

6.8 Bulk DOI activation

OAI User can activate institutional articles using an XLSX spreadsheet. The system recognizes DOIs already belonging to public articles within the institutional scope. Importing does not add outside publications or synchronize ORCID.

Use Download template and enter one DOI per row in the indicated column. Select the XLSX file and choose Validate and activate. Review the result before considering the task complete.

Invalid, duplicate, or unmatched DOIs are reported without changing articles outside the scope. Each import retains a history with its file, date, validation results, and activated articles.

DATAORCID Chile

Workspace: Overview, Explore, Manage data, Integrate, ORCID, Repositories, Support

Bulk DOI activation
Activate institutional articles from a spreadsheet and keep an auditable history of every import.

Universidad de Demostración
ROR: 01demo001

Only articles linked to this institution can be exposed.

Repository workspace
Choose an area to continue. Your institutional context is preserved.

5 sections

- Initial configuration** (01): Define the repository, publication policy, and public endpoint.
- Article selection** (02): Review which institutional works are exposed for harvesting.
- Metadata configuration** (03): Test formats and customize the DataORCID metadata mapping.
- Bulk DOI activation** (04): Validate an XLSX file and audit every activation import. **Current section**
- Harvesting access** (05): Register repositories and manage their private URLs.

Upload DOI spreadsheet
Only DOI belonging to public articles in this institutional profile will be activated.

Validate and activate by DOI
Use the provided XLSX template with one DOI per row. Invalid, duplicate, or non-institutional DOI will be reported without modifying unrelated articles.

Choose XLSX file | Browse | **Validate and activate**

Upload history
Open any file to audit the articles it activated and the state that existed before the import.

Import

FILE	IMPORTED	VALIDATION RESULT	IGNORED ROWS	STATE	ACTIONS
demo-doi-import.xlsx #1	2026-09-05 03:49 Alex Demo	3 of 3 DOI 3 articles activated	0 invalid 0 duplicates 0 not found	✓ Active and reversible	Audit Undo

FIGURE 28 DOI spreadsheet upload and import history.



IMPORTANT

A DOI import records OAI-PMH publication decisions. It does not certify a missing OpenAlex affiliation or modify the public source record.

6.9 Import audit and undo

In the upload history, Audit opens the file detail so you can review activated articles and their previous state. You can distinguish applied imports, undone imports, and the latest active reversible import.

OAI User can undo the latest active import. Review the detail, select Undo, and confirm in the platform. To reverse an older import, undo the newer ones first.

Undo restores changes attributable to that import while preserving later manual changes. Check the result and return to the articles table to inspect effective status.

User can review the available history and audit. If a correction is needed and you lack OAI editing permission, ask the responsible team to review it.

DATA ORCID Chile

Workspace: Overview, Explore, Manage data, Integrate, ORCID, Read from the API, Write to ORCID, Affiliation Manager, REPOSITORIES, OAI-PMH publishing, Support

Demonstration University

Data up to date | EN | User manual | oai.demo

OAI-PMH interoperability
DOI import audit
demo-doi-import.xlsx

← Back to upload history

Universidad de Demostración
ROR: 01demo001

Only articles linked to this institution can be exposed.

Repository workspace
Choose an area to continue. Your institutional context is preserved. 5 sections

- Initial configuration 01: Define the repository, publication policy, and public endpoint.
- Article selection 02: Review which institutional works are exposed for harvesting.
- Metadata configuration 03: Test formats and customize the DataORCID metadata mapping.
- Bulk DOI activation 04**: Validate an XLSX file and audit every activation import. **Current section**
- Harvesting access 05: Register repositories and manage their private URLs.

Import summary
2026-09-05 03:49 · Alex Demo · #1

Applied Undo this import

DOI rows	Matched DOI	Activated articles	Invalid DOI	Duplicates	Not found
3	3	3	0	0	0

Article-level changes
Compare the decision before this file with the current institutional selection. 3 articles

ARTICLE	BEFORE IMPORT	ACTION PERFORMED	CURRENT STATE
Collaborative science and public knowledge — study 03 10.0000/demo.003	No explicit decision	Activated by Excel	Active from this import
Open research metadata and institutional discovery — study 01 10.0000/demo.001	No explicit decision	Activated by Excel	Active from this import

Sign out

FIGURE 29 Audit of a demonstration DOI import.

6.10 Harvesting access

In Harvesting access, OAI User can register each institutional repository URI and generate a private URL for its harvester. User can review repositories and their status; credentials and controls are reserved for accounts with OAI editing permission.

Enter the repository HTTP or HTTPS address without credentials, query parameters, or a fragment, then choose Generate private URL. Copy the complete address. The URI identifies the recipient; the random URL key grants access independently of the IP address or Cloudflare.

In DSpace-CRIS, configure the private URL as OAI Provider, choose Simple Dublin Core (oai_dc), and harvest metadata only. Start or schedule harvesting in DSpace. No DataORCID sign-in is required.

After configuring the harvester, enable Allow harvesting only through registered private URLs and save the access mode. The general URL will stop working. Revoke access blocks one URL; Generate new URL invalidates the old one and requires updating the harvester.

DATAORCID Chile

WORKSPACE

- Overview
- Explore
- Manage data
- Integrate

ORCID

- Read from the API
- Write to ORCID
- Affiliation Manager

REPOSITORIES

- OAI-PMH publishing
- Support

Sign out

© 2026 Data ORCID-Chile. For questions, support, or to schedule online training, contact: **Gastón Olivares** Version 2.1

Access mode

General URL allowed

The repository URI identifies the recipient. The generated private URL grants access, including from a browser. Keep it confidential; it works independently of Cloudflare or the repository IP address.

☐ Allow harvesting only through registered private URLs

Register a repository and configure its private URL in the harvester before enabling this option. The general institutional URL will stop working.

Save access mode

Register repository

Repository URI

https://repository.example.edu

Use the repository HTTP or HTTPS address without credentials, query parameters, or a fragment. Up to 20 repositories per institution.

+ Generate private URL

Registered repositories

https://repository.example.edu **Enabled**

Private harvesting URL

https://dataorcid.example.org/oai/demonstration-key-not-a-live-provider/demonstration-only-not-a-valid-access-key

Identify oai_dc oai_openaire dataorcid

In DSpace-CRIS, use this private base URL as the OAI Provider, choose Simple Dublin Core (oai_dc), and harvest metadata only. Start or schedule harvesting in DSpace; no DataORCID sign-in is needed.

Generate new URL Revoke access Remove repository

FIGURE 30 Demonstration repository and its private harvesting URL.



IMPORTANT

Anyone who knows a private URL can read the XML, including in a browser. Keep it confidential. Revoking every URL keeps the general URL blocked while restricted mode remains active.

7. Help center

The Help center is under Support. It includes instant search and topics covering first steps, sources, data flow, metrics, downloads, the data dictionary, permissions, integrations, troubleshooting, and release notes.

Content follows the User and OAI User workflows. Topics and links adapt to enabled modules; a disabled module is also absent from the active help content.

Enter a term such as DOI, export, or open access to locate explanations. Open the topic and use its links to return to the relevant function. Consult this help before escalating an operational question.

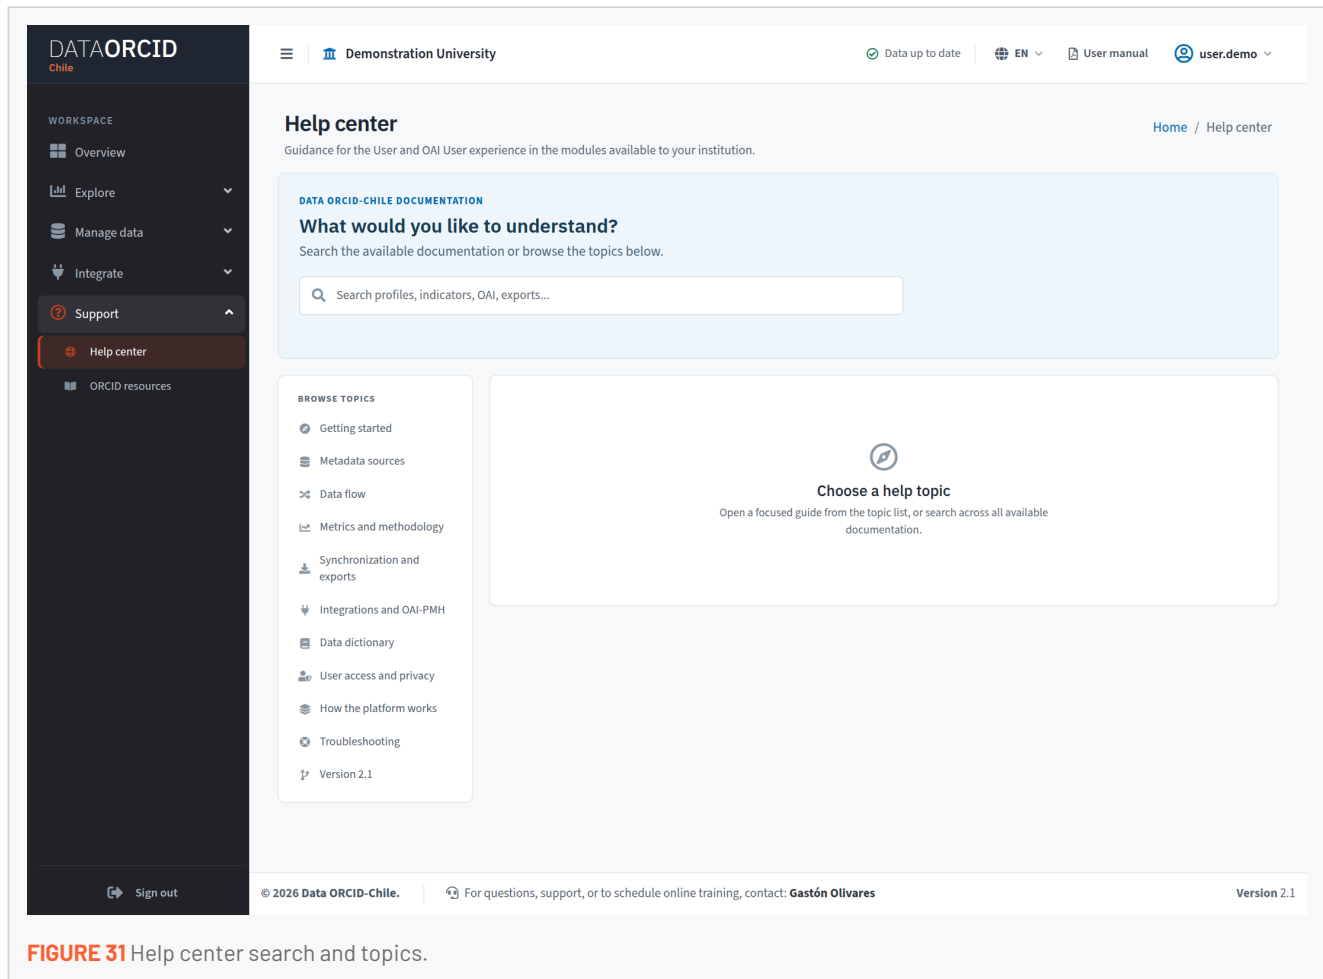


FIGURE 31 Help center search and topics.

8. Account and security

8.1 My profile

Personal options let you update your first name, last name, email, and position. Review the values, make your changes, and save. Email is used for notifications and password recovery.

Institution, ROR, and role cannot be changed on this screen. If they do not match your circumstances, ask the responsible team to review them.

The language selector lets you keep the interface in your preferred enabled language. Account changes do not alter a researcher's public ORCID record.

The screenshot displays the 'My profile' page in the DATA ORCID Chile interface. The page is titled 'My profile' with a subtitle 'Update the personal details associated with your account.' The user is logged in as 'user.demo'.

Personal details
Keep your contact and professional information up to date.

First name: Alex
Last name: Demo

Email address: user@example.org
Used for account notifications and password recovery.

Position or job title: Research information

Buttons: Cancel, Save changes

Footer: © 2026 Data ORCID-Chile. For questions, support, or to schedule online training, contact: Gastón Olivares. Version 2.1


FIGURE 32 Editing personal details of the fictional account.

8.2 Password and sign-out

To change your password, enter the current password, a new password with at least eight characters, and its confirmation. The system also limits it to 72 UTF-8 bytes; some characters use more than one byte.

Save the change and check the confirmation. Use a password exclusive to this account and do not share it. If you do not know your current password, use the recovery option on the sign-in page.

Sign out is at the bottom of the sidebar. Use it when finished, especially on shared devices. Avoid including credentials or private personal information in searches, files, or support requests.

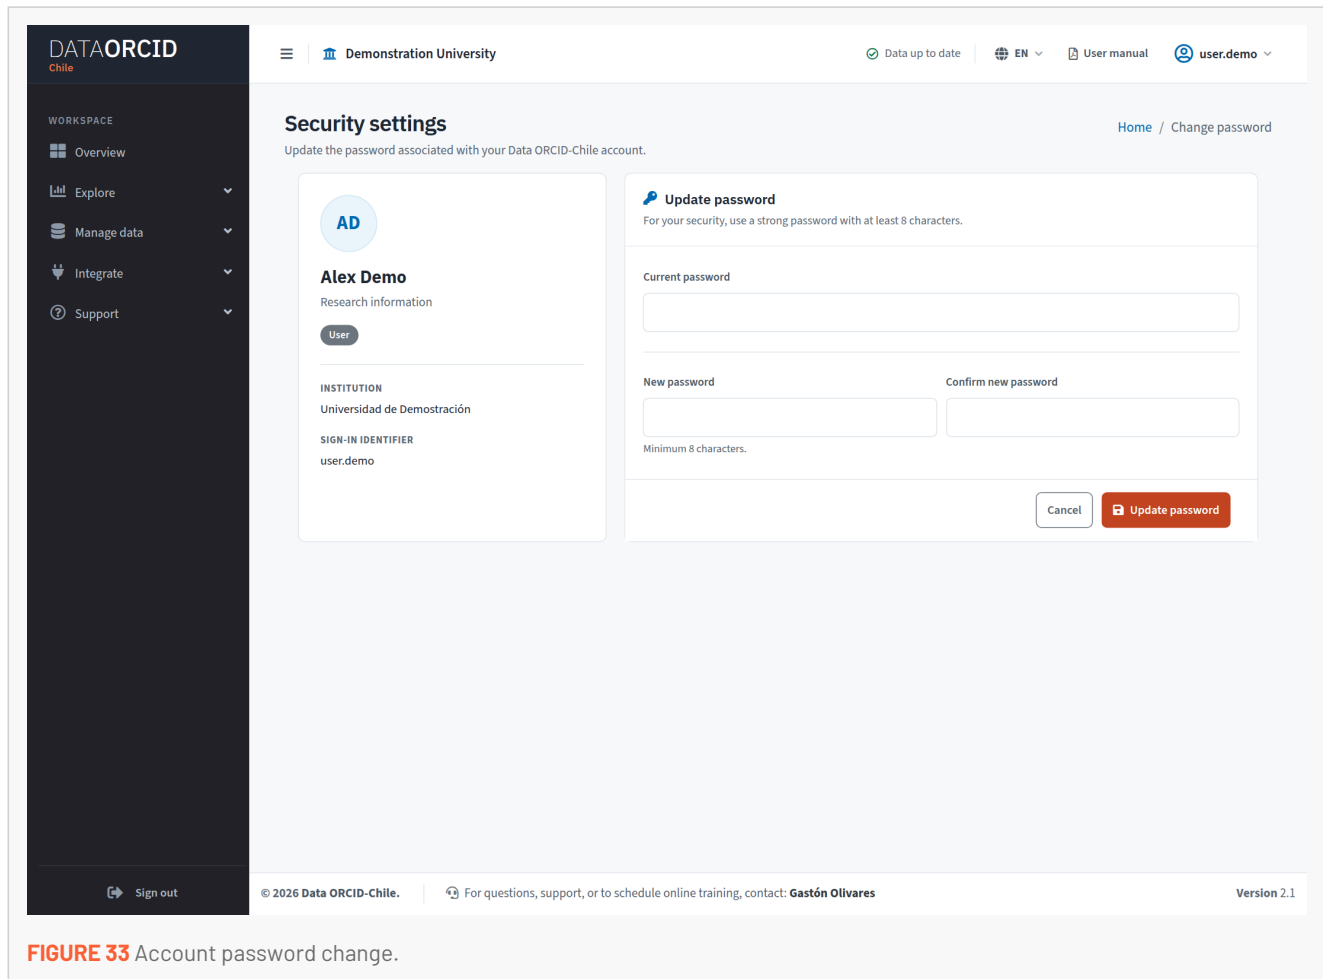

9. Sources, methods, and good practice

9.1 How institutional scope is built

ROR is the main institutional key. Verified GRID or Ringgold identifiers complement ORCID discovery when available. Results are combined and deduplicated by ORCID iD while retaining provenance evidence.

9.2 How ORCID, OpenAlex, and OAI-PMH relate

ORCID supplies public profiles and records. OpenAlex adds analytical metadata for eligible articles with an accepted match. OAI-PMH publishes metadata for the effective institutional selection; it does not download full text or modify ORCID.

9.3 Good practice

- 1 Check the update date, institution, and filters before citing a figure.
- 2 Distinguish ORCID records, canonical outputs, and enriched articles.
- 3 Read definitions and methods through information buttons.
- 4 Keep date, filters, and scope with each export.
- 5 Treat duplicate candidates and coverage gaps as signals requiring review.
- 6 Compare sets with equivalent periods, denominators, and coverage.
- 7 Review OAI-PMH selection and format before sharing its URL with the receiving system.

10. Glossary

TERM	DESCRIPTION
ORCID iD	Persistent identifier for a researcher.
ROR	Main institutional identifier used by the platform.
GRID and Ringgold	Verified legacy institutional identifiers that complement discovery; they do not replace ROR.
ORCID record	Public data added to a profile, such as a work or funding record.
Canonical output	Publication consolidated by normalized DOI or, conservatively, by title and year.
Cache	Local copy of retrieved information. Its date helps establish dataset freshness.
OpenAlex coverage	Proportion of eligible ORCID articles with a match and OpenAlex metadata.
Citations	Current publication citation count according to available OpenAlex information.
FWCI	Field-weighted citation impact, normalized by field, year, and document type.
Diamond OA	OpenAlex category for articles in fully open journals without author publication charges.
Green OA	OpenAlex category for access through a repository copy.
AM	ORCID Affiliation Manager; its Client ID helps identify managed records.

10.1 Export and integration terms

TERM	DESCRIPTION
Background export	File preparation while you continue using the platform.
Valid file	Completed export that is still downloadable and, where applicable, reusable.
OAI-PMH	Protocol used by one system to harvest metadata from another.
Provider	Service exposing the institutional selection through a base URL.
Harvester	Receiving system that queries the provider and ingests metadata.
Exposed article	Article included in the effective selection; public availability also requires an enabled provider.
OpenAlex validation	An article affiliation matching the active institution's ROR.
Manual decision	Inclusion or exclusion that overrides the automatic policy.
oai_dc	Provider's Dublin Core metadata format.
oai_openaire	Provider's OpenAIRE metadata format.
dataorcid	Format whose fields and destination names can be customized by OAI User.
DOI import	XLSX spreadsheet that activates articles already in the institutional scope and retains an audit.
Import undo	Action reversing the latest active import while preserving later manual changes.

11. Troubleshooting

No data appears

Reset filters and check the update indicator. If the institutional dataset is unavailable, ask the responsible team to review its status.

A figure differs between modules

Check whether it counts ORCID records, canonical outputs, or OpenAlex articles. Review period, type, open access, affiliation, and update date.

An export is empty, pending, or expired

Confirm that the view has results and remove overly restrictive filters. Check the floating center for status. Request an expired file again; if a task does not progress, report the view and request time.

I cannot edit OAI-PMH articles or mappings

User has read-only access. Selection, DOI imports, and mapping require OAI User assigned to the institution. If this permission is needed for your work, request a review.

A DOI is not activated or I cannot undo an import

Check the template and the report of invalid, duplicate, or unmatched DOIs. Imports only activate articles in institutional scope. Only the latest active import can be undone; review the history and later changes.

A module is missing or the public provider fails

Availability depends on enabled modules and provider status. Consult the Help center and ask the responsible team to review. Include page, date, filters, and a screenshot without sensitive information.



CONTACT INFORMATION

**Consorcio para el Acceso a la Información
Científica Electrónica**



Moneda 1375, 13th floor
Santiago, Chile
Telephone +56 2 2365 4589
secretariaejecutiva@cincel.cl
www.cincel.cl