

Generative Tokenomics: The Constellation Validator Rewards Model

Constellation Labs

February 2, 2019

Abstract

We propose the Generative Tokenomics, a validator rewards model that adapts according to dynamic network organization. In it, the \$DAG token as a digital commodity opens the opportunity to well established and known market dynamics. The generation and perpetuation of true utility can be likened to the production of a real-world commodity. A core role of the token is as a credit to access network resources in the absence of reputation, the latter of which one may obtain by hosting a node and maintaining a seeder-leecher-ratio.

We first discuss our influences and tie the ideas back to the structure layed out in the Constellation business whitepaper ¹, before we discuss the arising economics and reflect on the mathematical abstractions introduced previously.

Introduction

In general, a cryptocurrency is a commodification of the utility provided by a distributed consensus protocol, similar to how currencies were once backed by gold or silver. For most cryptocurrencies, that utility is an atomic update to an immutable append only log, yielding a tamper proof record of network state. Network state is defined by the dimensions of the data model and units involved in the transactions of the protocol.

Consensus protocols with a linear data model have fallen short in terms of scalability. In most cases they are distributed systems that operate in serial, which is antithetical to the concurrent underpinnings of distributed systems; horizontal scalability and efficient data locality. Attempts at sharding these

¹Constellation business-whitepaper (2018)
<https://github.com/Constellation-Labs/whitepaper-business>

protocols are limited by their ability to adapt to network outages and centralized facilitator selection models that hinder the efficacy of data validation.

In order to apply the utility of a distributed consensus protocol to scalable backends, they must be fully compatible with dynamic scaling/deployment features such as elastic deployment and dynamic partitioning. As the backbone to these systems is the economic incentive to provide computational resources, a key requirement is the ability for their validator rewards models to dynamically adjust in tandem with network organization. An emerging class of consensus protocols-of which the Constellation Protocol is a type of-overcome these limitations with a nonlinear data model known as a directed acyclic graph (DAG).

For nonlinear protocols, Generative Economics is a comparably dynamic economic model. A Generative Economy is a living economy that is designed to generate the conditions for life to thrive, an economy with a built-in tendency to be socially fair and ecologically sustainable ². The Constellation Protocol embodies this ethos in facilitator selection mechanism which is based on meritocratic reputation system and its validator rewards model. Validator rewards adjust as nodes join or leave and increase or decrease their contribution.

A Generative Tokenomic Model

In Constellation, utility is given not only by oraclization-immutable notarization and the application of consensus to validate data-but also by throughput, or the rate at which data is notarized and validated. Like all consensus protocols, access to rewards is governed by facilitator selection. In turn facilitator selection is governed by a decentralized locality sensitive hashing mechanism which organizes the network by a utility (seeder/leacher) ratio of transactions validated vs transactions submitted. Reputation is equivalent to the throughput a facilitator has provided vs the throughput used (as well as the efficacy of oraclization-notarization and validation). As nodes participate they are ranked based on their reputation. The magnitude of rewards and reputation is proportional to rank. Fees are charged relative to the scarcity of the throughput and are only charged if an account breaches its allotted utility ratio. Apart from being the first fixed-total-supply asset accessible throughout the platform, the \$DAG token ³ acts as a credit mechanism like cash, which, like gas ⁴ can be used to pay transaction fees when an account has not or can not maintain their required utility ratio. \$DAG is injected into the pool of validator rewards,

²Kelly, Marjorie, "Toward A Generative Economy"

<https://www.opendemocracy.net/ourkingdom/marjorie-kelly/toward-generative-economy>

³awesome-constellation information on the \$DAG token

<https://github.com/Constellation-Labs/awesome-constellation#the-dag-token>

⁴Section 4.2 EthereumYellowpaper

<https://ethereum.github.io/yellowpaper/paper.pdf>

and there is incentive to validate transactions that have an accompanying fee attached.

The dimensionality of reputation is equivalent to a volume of computational space relative to the computational space of total network. It is a perishable good in the constellation economy as accounts that leave the network will watch their reputation recede until 0 and they are replaced by a new player. Accounts' reputation is varying and falls according to various tiers which follow our definition of rank along with a branching factor. It is the role of \$DAG to provide a non depreciating asset for work provided. \$DAG will initially be earn-able/minted through participation within a minting window, the rate of which will depreciate according to a minting curve. During the minting window and after \$DAG will be earned by accounts processing transactions that have been submitted with accompanying transaction fees (as opposed to transactions submitted within an account's allotted seeder/leacher ratio.)

Validator Rewards in Constellation

Constellation's data model was designed to follow combinatorial models in distributed computing, where network state can be described in terms of simplicial geometry and transitions are defined in terms of a discreet gradient. This is advantageous as it allows a numerical correspondence to placement within a network of hierarchical mesh topology ⁵, which is optimal for a highly available network of heterogeneous devices.

The value of our network derives from the total computational space (volume of network resources) available for verifying transactions i.e. its maximum throughput. Since our data model is a data dependency graph with hashes linking collections of data, we can equate value to the total amount of storage space that it can contain. Thus we use a calculation of the 'volume' of an account's contributions (signed observation edges) relative to the total volume of the data dependency graph to define validator rewards (reputation and \$DAG). We then weight this contribution by its relative information gain or its measure of entropy, lowest being best, according to the distribution of all accounts' entropy measures. For note, an account can be attributed to multiple nodes.

If we consider each Signed Observation Edge as a basis of given rank r in the space of the data dependency graph, we can calculate this volume as the integral over the outer product space of these basis, which is a differential r -form.

⁵KFUPM chapter on designing a network topology, see chapter 5
<http://faculty.kfupm.edu.sa/coe/marwan/richfiles/Designing%20a%20Network%20Topology.pdf>

The volume of 'space' of nodes across ranks $1 \dots r$

$$\int_M \epsilon_1 \wedge \dots \wedge \epsilon_r$$

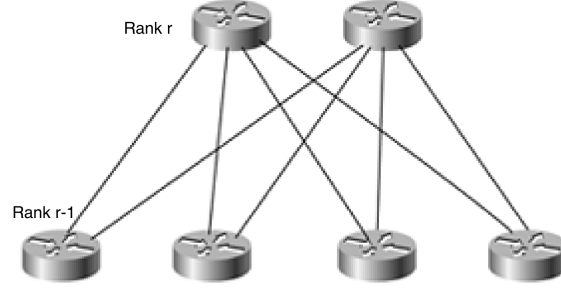


Figure 1: Hierarchical Mesh topology. Original from M.H.Abu-Amara³

where M is a manifold, ϵ is the basis of the vector space of rank r . Each collection in the data dependency graph has the basis and rank of the node that emitted it. Within our model this would be explicitly defined as the numerical integration over the outer product of our cohomological definition⁶ which is a vector space given by the tensor product of each space across ranks

$$\sum_{1 \dots r} \Gamma^{\epsilon_1} \otimes \dots \otimes \Gamma^{\epsilon_r}$$

where each Γ^ϵ is a manifold corresponding to a rank in the differential form above, subordinate to the rank before it. If we assume a uniform data transmission, we can define bandwidth (SOE/sec) as the total space⁷ of the resources given by each node

$$B_{(\frac{\text{SOE}}{\text{sec}})} = \sum_r \int \rho_i \theta_i \omega$$

where ρ_i is a partition of unity and θ_i is a discrete diffeomorphism (the effect that the protocol has on the total configuration space) on our r -form ω and SOEs are Signed Observation Edges⁸ linking collections in our data dependency graph.

⁶Blockchain cohomology text
<https://arxiv.org/abs/1805.07047>

⁷ftp.cis.upenn.edu/pub/cis610/public_html/diffgeom4.pdf

⁸constellationlabs.io blog
<https://constellationlabs.io/blog/index.php/how-constellation-is-different-than-blockchain/>

We determine a measure of performance, by mapping each entry in the bandwidth space to its normalized Shannon entropy (bits), giving us a measure of relative information gain.

$$B_{\text{entropy}} = \sum_r \int \rho_i H_i \omega$$

where H is our normalized Shannon entropy

$$H_n(p) = - \sum_i \frac{p_i \log_b p_i}{\log_b n}$$

and p is a probability measure of how the result of a node's actions deviate from the acceptable state of the protocol and b is our base, bits in the case of Shannon entropy. Deficiency in entropy can be seen as a measure of efficiency. Normalized entropy is advantageous as it scales with sample size and has shown effective at anomaly detection in networks⁹.

Results

The Constellation validator rewards model forms a well defined feature space for defining a reputation model, which is core to reputation based consensus. Facilitator selection is governed by this model which optimizes the network topology bases on the performance of each node. By tying optimal network organization to the criteria for facilitator selection, such a model embodies the adaptive qualities of a Generative economic model.

In addition to forming a tractable kernel for a reputation model based on performance, defining our dynamics in terms of a differential model allows for econometric methods like equilibria analysis to be employed for analyzing the stability of our model under attacks or an influx of \$DAG used to pay for transactions. Equilibria analysis of this model will be a topic of future work.

⁹Karthik, P. "Detecting Anomalies Based On Entropy-Estimation"
<http://ijsetr.org/wp-content/uploads/2013/07/IJSETR-VOL-2-ISSUE-4-910-915.pdf>