

Generative Economics and The Generative Calculus: An Economic System for Autonomous Social Infrastructure

Wyatt L. Meldman-Floch

December 21, 2020

Abstract

A new economic system designed to maximize the utility of autonomous infrastructure is presented. A global interpreter for interaction and deployment of this infrastructure as well as an associated programming language specification is constructed. These constructions are then used to define the "Economic Engine" and via the Second Law of Thermodynamics prove that the stability of the economy is proportional to the efficiency and volume of resources provided to host it.

Contents

Introduction	3
Circumstances Shaping Industrial Revolution	4
The Generative Calculus	5
The Category of Differentiable Consensus Protocols	6
The Consensus Topos	9
A Day Construction of Generative Effects	10
A Note on Nonlinearity	17
Morse Smale Flows and Steady States	18

Cell Complex of Triangulated Generative Effects	22
Spiders of Triangulated Hypergraph Categories	29
The Path Integral Formulation	30
General Stability of C^* Hilbert Bundle via Diffusion Map	31
A Note on Information Gain and Coherence	32
Safety proofs with Generative Calculus	33
Convergence proofs for ConTop	35
Babel: A Language Syntax for Distributed Interpreters	36
Generative Economics	38
The Economic Engine	39
Utility Theory of Arbitrage Free Networks	45
Equilibria Analysis	47
Pareto Optima	49
Transition Matrices for ConTop	51
Transition Matrix for ConTop with n-state channels	52
Transition Matrix for ConTop L_0 and Forgery Probability	54
Examples: HGTP	55
L_0 Steady States	57
L_1 Steady States	57
$L_0 \circ L_1$ (\$DAG) Steady States	57
HGTP Proof of Safety	57
Accrual of value for \$DAG Fibers	57
Remarks	57

Introduction

The following is a new economic system designed as an evolution of the economic system of Capitalism into a self regulating Generative Economy¹: a living economy designed to generate the conditions for life to thrive and with a built-in tendency to be socially fair and ecologically sustainable. Ironically a similar concept of exists in both human psychology (Generativity) and mathematics (Generative Effects²). As such a tall order, it seems warranted to define the context within such a model was created. In the year 2020, humanity has excelled into what has contemporarily been dubbed the 4th industrial revolution. An industrial evolution is typically defined by a technological breakthrough that improves the scalability of the means of production. The 4th has been characterized as the blending of the physical, digital and biological worlds. The conduit for such synthesis is undoubtedly the constant bombardment of computer screens into our fields of vision. These black mirrors are meant to connect us in a global context of situational awareness: a shared reality. However, without verification of the data that comprises the digital world, these reality sharing devices have become reality distortion machines. Analysis of contemporary social and news media denominates clearly that individuals walk side by side physically, yet their mental realities are bifurcated along the lines of division that separate the sources of data in the digital world. In truth, this is caused by malicious actors seeking to compromise the sovereignty of the individual. Individual sovereignty is the bedrock of the economic system of Capitalism as "rational actors" require sovereignty to act rationally in their best interest. From this lens, Capitalism today is really more of an ideal like Communism which has never been implemented in purity. Activated individual sovereignty is the fundamental requirement to make markets actually free. However, protecting individual sovereignty requires a collectively shared context from which the sovereign can reason; an emodyment of Hegel's definition of reality. As will be shown by the end of this work, the solution to this "Reality Problem" is creating a new internet architecture that functionally extends the electromagnetic fields outside of the physical servers themselves by processing digital data with the same mechanics as analogue. Specifically, data flows are constructed using the Day Convolution, a digital equivalent of the Fourier transformation, allowing for state proofs to be verified using a cryptographic equivalent of Error Correction Codes.

¹Kelly, Marjorie, "Toward A Generative Economy"
<https://www.opendemocracy.net/ourkingdom/marjorie-kelly/toward-generative-economy>

²David Spivak, Brendan Fong, "Seven Sketches in Compositionality"
<https://math.mit.edu/~dspivak/teaching/sp18/7Sketches.pdf>

Circumstances Shaping Industrial Revolution

But before heading into the construction, more context can be added as to how we got here and why solving the 4th industrial revolution's "incongruity problem" is paramount. As to how we got here, it's worth looking at arguably the biggest influence on western political philosophy since the age of enlightenment, at least to America's Founding Fathers: Rousseau's Social Contract. Rousseau's Social Contract was an embodiment of humanity's understanding of reality; both scientific and simply factual. Most societies were not even aware of planetary geography yet alone each other. It was simply understood that earth was endless and full of limitless resources. This presupposition that, at the time of writing, we are painfully aware is inaccurate. Moreover, the field of human psychology had not been founded and human beings were considered inherently flawed self interested amoral beings; the motivations for a person's actions could not be identified as mental illness or social disorder. The main tenant of the Social Contract, was that a supreme authority needed to govern the actions of society lest it fall into chaos. Thus, the most moral avenue to do so was to make this governance as unnoticeable as possible ("Invisible Shackles"). Rousseau wrote these ideas during his time in Paris which was a notably raucous period and his inspiration for the invisible shackles was to reconcile the Parisian free spirit with the unity of his home town of Geneva which was notorious for its piety and social order. He believed that the state could perform the act that the almighty did in Geneva to arbitrate a "Contract" that each human is essentially assigned at birth, where that contract defines personhood and responsibilities to the state. Essentially the thesis is that humans are too dangerous to be allowed access to their own sovereignty, decoupling the concept of the sovereignty from personhood into "the sovereign" which is equivalent to statehood.

Unfortunately, governments are not as immune to corruption as the concept of "God". Thus as we have seen since the Social Contract's inception the socioeconomic systems of the nations that emerged share a consistent narrative of recklessness, dehumanization and schadenfreude; facilitated by a ruling class typically differentiated by generational wealth. Within this context it is clear how the ethos of Imperialism lives within edicts such as Manifest Destiny, which are embodied even today in the burgeoning field of space law.

The necessity for a fundamental socioeconomic consciousness shift in order to evolve into an interstellar species was notably characterized by R. Buckminster Fuller and his work on Synergetics. Fuller characterized the development in terms of ordered stages. Type 0 (which is what we are now) is a species confined to its original origin and have a limited time to "get their shit together" or otherwise face extinction due to an inability to cooperate in the distribution and access to resources. Type 1 civilizations on the other hand have evolved into a self sufficient cooperative that has expanded their home to the cosmic ecosystem. These ideas are detailed concretely in his book Critical Paths and

there are even accompanying materials such as "World Game" for children and community organizing tactics for a social movement to Type 1. The main takeaway from Critical Paths is that it's not enough to develop the technology for space travel; we need to develop the socioeconomic technology to facilitate cooperation amongst a decentralized extra terrestrial species.

Lofty visions of special unity have been lauded for many purposes and in many ways, such as Ray Kurzweil's Singularity. However, without the emotional technology to preserve the sovereignty of the individual, a Singularity as such implies an irreversibility to tenants of its embodying society. Is it even possible to reclaim our individual sovereignty or even get it together in time to make it off planet? A belief that is core to the rest of this paper and held by the author is yes. What if it were possible to create a verifiable reality that could arbitrate a new social contract? A social contract defined by its prioritization of humanization, sovereignty and simply put: what we cherish about being human.

The following constructions and proofs are a reformulation of "Statehood" in terms of public social infrastructure that autonomously self regulates. Such infrastructure removes the necessity for human intervention in the arbitration of the Social Contract, i.e. legislation and law enforcement etc. By enabling the principal of "Code as Law", this infrastructure can arbitrate the tenants of the Social Contract, now defined by verifiable computer code, removing unsustainable relics in our current social fabric. Specifically, Generative Economics is presented as a solution to one specific aspect of the "reality problem": Economic Arbitrage. More concretely, we will see that the solution an engine that extracts utility from the data passing across the digital world and the synergetic orchestration of autonomous network infrastructure.

The Generative Calculus

The context within which our model exists are recent advancements in distributed ledger technology, namely Cryptocurrencies. Traditionally a Cryptocurrency is just a speculative asset like a security that also has some real world technological use case, but in general the value of the currency is tied to speculation and not to any verifiable measure of utility. The following is a reformulation of Cryptocurrencies as a commodification of the utility provided by a distributed consensus protocol.

The recent advancements in distributed ledger technology alluded to revolve around scalability. Consensus protocols with a linear/block data model such as Bitcoin and Ethereum are fundamentally incompatible with the advent of microservice architectures. In most cases they are distributed systems that operate in serial, which is antithetical to the concurrent underpinnings of distributed systems; horizontal scalability and efficient data locality. In order to

apply the utility of a distributed consensus protocol to scalable backends, they must be fully compatible with dynamic scaling and deployment features such as elastic deployment and dynamic partitioning. As the backbone to these systems is the economic incentive to provide computational resources, a key requirement is the ability for their validator rewards models to dynamically adjust in tandem with network organization. An emerging class of consensus protocols overcome these limitations with a nonlinear data model known as a directed acyclic graph (DAG.) HGTP, the core technology developed from the Cohomology Theory of Blockchain Technology and backbone of the HyperGraph Network will be referenced periodically throughout the rest of this work as a real world example of these principles.

The Category of Differentiable Consensus Protocols

First, let's construct a universal context to axiomatize the mechanics of distributed consensus protocols by employing the principle construction of Blockchain Cohomology: the Poincare Complex. The Poincare Complex is a generic combinatorial model for consensus systems, where network state is described in terms of simplicial geometry and transitions are defined in terms of a discrete gradient. Its main advantage is that it symbolically represents the requirements for consensus protocols to be defined recursively, forming a network with hierarchical mesh topology³, which is optimal for a highly available network of heterogeneous devices, in its definition as a Functorial Operator. The Poincare Complex was constructed using the language of algebraic topology because it simplifies correctness proofs into constructivist logic (proof by construction) by reducing the context of the problem to spaces. However, the converse is true in classifying instances of a Poincare Complex. Fortunately, due to the focus on homotopy types in the construction of the Poincare Complex, there is an equivalent construction by means of a category, which will soon be defined as the Category of Consensus Protocols. Category theory is helpful in that it organizes, frames, and contextualizes information so it can be managed easier, and one can often prove statements in the abstract setting of categories and functors and then apply them to particular situations. The Category of Consensus Protocols can then be extended to create a "universal construction" that allows for mappings across or compositions of Consensus Protocols that retain the same guarantees as the starting Consensus Protocols, by means of defining a particular functor. Functors are mappings between categories which are used to define this notion of equivalence. Let's use this functorial operator to construct a proper category and use the functors of this category to define a universal context for Consensus

³KFUPM chapter on designing a network topology, see chapter 5
<http://faculty.kfupm.edu.sa/coe/marwan/richfiles/Designing%20a%20Network%20Topology.pdf>

Protocols. First, consider the Poincare Complex

$$\Omega_{\Gamma}^T : 0 \xleftrightarrow{\partial} \Omega_{\Gamma^*}^T(\epsilon) \xleftrightarrow{\partial} \Omega_{\Gamma}^T(\epsilon(P_0)) \dots \Omega_{\Gamma}^T(\epsilon(P_{\pi})) \quad (1)$$

where Ω_{Γ}^T is a functor obeying the laws of the Protocol Manifold⁴ and Protocol Topology⁵ and functorial group homomorphisms gHylo, a generalization of Hylomorphism that allows any combination of refolds out of comonadic recursion schemes⁶. These refolds are all defined as a combination of catamorphism and anamorphism where the f-algebra and f-coalgebra dual, which maintain Poincare duality of the protocol manifold up to π isomorphism. In terms of Σ and ϵ , noting that our functor Σ is a valid f-algebra and sheaf ϵ a co-algebra, is a combination of the following:

A Hylomorphism or "Gather Apply"

$$\epsilon \leftarrow P \times \Sigma : \Omega^T(\epsilon, P) \quad (2)$$

and Metamorphism which is a valid refold or a "Scatter"

$$\Omega_{\Gamma}(P, \epsilon) : \Gamma_{\Sigma} \times \epsilon \rightarrow P \quad (3)$$

which are constructions that encapsulate the two directions of the distributive laws required for a commutative monad⁷ in syntax more natural in functional programming; further examples of gHylo constructions can be found in Tessellation⁸. Note, any refold satisfying duality of recursion is a valid Scatter.

The original construction used the sheaf cohomology of synthetic differential geometry to create a topological space classified by homotopy equivalence between state spaces, where homotopy is defined by functor algebra invariants. Specifically the most basic invariants are the homotopy group π , the homology group Ω_{Γ} and cohomology group Ω^T . These invariants assign a group structure to a space and specifically as defined by blockchain cohomology, a graded abelian algebra. But they also define a homomorphism (a map of groups) to each map of spaces. This feature allows us to transfer comparisons between spaces (the role of maps in topology) to comparisons between groups. It is equivalent to say that π , Ω_{Γ} and Ω^T are functors from the category of topological spaces to the category of groups, because for each k the following commutative diagrams commute:

⁴Meldman-Floch, Wyatt, "Blockchain Cohomology: Sec 23"
<http://ceur-ws.org/Vol-2478/paper2.pdf>
⁵Meldman-Floch, Wyatt, "Blockchain Cohomology: Sec 2"
<http://ceur-ws.org/Vol-2478/paper2.pdf>
⁶Patrick Thomson, "recursion-schemes-part-6"
<https://blog.sumtypeofway.com/posts/recursion-schemes-part-6.html>
⁷gelisam, "use Gather/Scatter instead of distributive laws",
<https://github.com/ekmett/recursion-schemes/pull/51>
⁸buckysballs, "name of pr",
<https://github.com/tessellation/>

Proof: composition of Ω_Γ

$$\begin{array}{ccc}
 X & \xrightarrow{f} & Y \\
 \pi_k \downarrow & & \downarrow \pi_k(f) \\
 \pi_k(X) & \xrightarrow{\pi_k(f)} & \pi_k(Y)
 \end{array}$$

Proof: composition of Ω^T

$$\begin{array}{ccc}
 X & \xrightarrow{f} & Y \\
 \Omega^k \downarrow & & \downarrow \Omega^k \\
 \Omega^k(X) & \xleftarrow{\Omega^k(f)} & \Omega^k(Y)
 \end{array}$$

Specifically a Category \mathcal{C} consists of

- Axiom A) A class of objects $Ob(\mathcal{C})$
- Axiom B) For any two objects X and $Y \in Ob(\mathcal{C})$, a class of morphisms (or equivalently maps/arrows) $Hom_{\mathcal{C}}(X, Y)$ for some $f : X \rightarrow Y$ and for an element $f \in Hom_{\mathcal{C}}(X, Y)$ such that there is a composition function $Hom_{\mathcal{C}}(X, Y) \times Hom_{\mathcal{C}}(Y, Z) \rightarrow Hom_{\mathcal{C}}(X, Z) \Rightarrow (f, g) \rightarrow g \circ f$ that satisfies the usual associativity and identity axioms.

Lets define the Category of Consensus Protocols and prove that it is indeed a Category, specifically a Category of sheaves. Proof by Construction: define the Category of Consensus Reaching Systems as a presheaf category

$$\mathcal{C} : \{Obj(\mathcal{C}) : \{\Omega_\Gamma^T\} \mid \rightarrow : \Omega_\Gamma^T \circ \Omega_\Gamma\} \quad (4)$$

If follows by construction that arrows ∂ satisfy Axiom B via the compositions proofs of Ω^T and Ω_Γ and our object Ω_Γ^T satisfied Axiom A by definition.

Proof of presheaf condition: given two objects $P, Q \in \mathcal{C}$ the Poincare Protocol a morphism $\alpha : P \rightarrow Q$ between them is a natural transformation of functors such that

$$\begin{array}{ccc}
 & P & \\
 \swarrow & \downarrow \partial & \searrow \\
 \mathcal{C} & & Hyp \longrightarrow Set \\
 \searrow & & \swarrow \\
 & Q &
 \end{array}$$

via the enrichment of geometric cw-complexes has strict ordering enforced by deRham cohomology of Ω_{Γ}^T objects, satisfying the presheaf condition due to the existence of forgetful functors into the category of hypergraphs for all deRham complexes.

The Consensus Topos

The Poincare Protocol was defined in terms of a special topological object called a sheaf ϵ which is an object that encapsulates action within a space. The idea is similar to how basis are managed in ordinary vector calculus but extended to abstract spaces. In differential geometry sites, (one element of the sheaf object), are "stitched together" to form a domain upon which differential forms leading to proper calculus can be conducted; as will be demonstrated later, this is core to the derivation of utility function. However the real reason for formulating in terms of sheaves is the ability to construct a topos, a special kind of category for "behavior types" whose elements or configuration state changes through time, as its objects. This allows the verification of processes and even quantification of their safety, which is the goal of wider field of Complex Systems of Systems Theory⁹. Further research shows that applications of Blockchain technology and even the terminology (Contracts etc.) are in essence just extensions of logic proofs defined in terms of the intuitionistic logic of a topos. Let's construct the Topos of Poincare Protocols so it can be used as a context for the rest of the paper.

A Category of Sheaves is a topos, if the following conditions are met:

- Axiom C) The sheaf condition of a presheaf ϵ is satisfied¹⁰, namely there exists a matching family of p-sections over a "covering" or collection of open sets contained within an object, such that for each section within the presheaf, the matching families are equivalent up to Homotopy. If there exists a unique gluing for every matching family we say that P satisfies the sheaf condition for the cover.

Proof of Axiom C: Recall the de Rham complex of the definition of the Poincare Protocol

$$\Gamma_X(S^*) : 0 \rightarrow \Gamma_X(\epsilon) \xrightarrow{d^0} \Gamma_X(S^0) \xrightarrow{d^1} \dots \quad (5)$$

a topology X defined by an acyclic resolution the "block-sheaf" ϵ which is an A-module sheaf $\epsilon(X)$ over topological space X , can be described by global sections

⁹Spivek et. al., "Abstraction, Composition and Contracts:A Sheaf Theoretic Approach", <https://arxiv.org/pdf/1802.03080.pdf>

¹⁰Spivek et. al., Definition 7.35, "Abstraction, Composition and Contracts:A Sheaf Theoretic Approach", <https://arxiv.org/pdf/1802.03080.pdf>

$$\Gamma_X(\epsilon) \equiv \Gamma(X, \epsilon)$$

$$H_n(X, \epsilon) := R^n(\Gamma(C, \epsilon) := H^n[\Gamma(C, S^*)] := \ker \Gamma_X(d^n) / \operatorname{im} \Gamma_X(d^{n-1}) \quad (6)$$

where $R^n\Gamma$ is the right derived functor of the global section functor $\Gamma_x(\cdot) \equiv \Gamma(X, \cdot)$ where R^n is equivalent to the i^{th} linear ringed subspace above. Given two topological spaces, X and $Y \in \mathcal{C}$, an open subset $Op \subseteq P(X) | P(X) = \{U \subseteq X\}$ and $\Gamma : Op \rightarrow Hyp \rightarrow Set$, via the singular homology of chain complexes carried by the protocol topology Σ^{11} , the global sections for each topology are unique up to homotopy, which means that right-derived functor H_n defines the \mathbb{A} -resolution of a sheaf ϵ with unique covering for all Γ , which satisfies the sheaf condition.

• Axiom D) There exists a "subobject classifier" Ω the object of truth values, such that Ω is the presheaf that assigns $U \in Obj$ the set of open subsets of U :

$$\Omega(U) := \{U' \in Obj | U' \subseteq U\} \quad (7)$$

Proof of Axiom D: this is trivial, it is the presheaf of the linear subspaces of the sheaf cohomology of the de Rham complex used in defining ϵ .

We now have the Consensus Topos

$$\mathcal{E} := Shv(\Omega_T^T, Op) \quad (8)$$

which is a sheaf topos of Poincare Protocols.

A Day Construction of Generative Effects

The Consensus Topos is a powerful object in that it can be used to quantify the compatibility of consensus protocol and even calculate measures of safety in a Consensus Protocol. Calculus of Functors is a theory that aims to "approximate" functors in algebra and topology much like the Taylor polynomials approximate ordinary smooth real or complex-valued functions. Functors of the Consensus Topos are compatible with the calculus of functors, but in order to incorporate system guarantees, the enrichment of these functors is required for concrete metrics. Behavioral Types can be quantified and analyzed in terms of Generative Effects, namely by the Generative Calculus which is defined below, but first we must construct a context for the Generative calculus.

The Generative Calculus is largely an extension and in some ways simplification of the Abelian Functor Calculus, which is the calculus of functors of abelian categories. The construction of a directional derivative for abelian categories provides an abstract framework that makes certain analogies between

¹¹eq 8, B Cohomology

classical and functor calculus explicit. This analogy as will be shown, is necessary to calculate metrics in the consensus topos using de rham cohomology (a measure of how well the fundamental theorem of calculus holds up) to quantify 'lossiness' similar to the theory of error correction codes. By further reducing the arrows of the category to a day convolution, Generative Calculus calculates safety in terms of manifold deformation/energy loss or equivalently in the language of fourier transforms, decoherence. First, let's start from the definition of Abelian Functor Calculus and its associated directional derivative, within that context the Generative Calculus will be defined followed by proofs of properties specified.

In order to take advantage of the work of Bauer et. al. we need show that the ConTop is an appropriate abelian category. Fortunately, their construction relies on homotopy equivalence which has been previously shown for Poincare Protocols¹². By identifying a comonad C_n on the category of all functors between a fixed pair of abelian categories, and defining $P_n F$ directly as a resolution of F by this comonad, a Taylor tower of abelian categories is derived. For an abelian category \mathcal{A} , let $Ch\mathcal{A}$ denote the category of chain complexes on \mathcal{A} . By means of totalization via the methods used by JM2¹³ the category of chain complexes can be considered a pseudomonad acting on the large 2-category of abelian categories, arbitrary functors between them and natural transformations. Consider the quotient monad $Ch(-)$ acting on the 1-category $AbCat$ of abelian categories and isomorphism classes of functors:

- Axiom A) The monad carries an abelian category \mathcal{A} to the category $Ch\mathcal{A}$ of non-negatively graded chain complexes in \mathcal{A}

- Axiom B) The monad carries a functor $F : B \rightarrow A$ to its prolongation $ChF : ChB \rightarrow ChA$. By way of the Dold-Kan equivalence between non-negatively graded chain complexes and simplicial objects, the functor ChF is defined to be the composite

$$ChF : ChB \xrightarrow{\cong} B^{\Delta_{op}} \xrightarrow{F_*} A^{\Delta_{op}} \xrightarrow{\cong} ChA \quad (9)$$

where the action of F on simplicial objects is by post-composition.

- Axiom C) The components of the unit of the monad are the functors

$$\mathcal{A} \xrightarrow{deg_0} Ch\mathcal{A} \quad (10)$$

that embed \mathcal{A} as the subcategory of chain complexes concentrated in degree zero.

- Axiom D) If the components of the multiplication of the monad are the functors

$$ChCh\mathcal{A} \xrightarrow{Tot} Ch\mathcal{A} \quad (11)$$

¹²b cohomology

¹³[JM2, Lemma 5.7] <https://arxiv.org/pdf/1610.01930.pdf>

that convert a "double complex" (chain complex of chain complexes, whose squares commute) in \mathcal{A} into a chain complex in \mathcal{A} by forming the "total complex"

An equivalent monad can be constructed from ConTop .

Proof of equivalence of Th and Ch : the Protocol Complex used to construct ConTop can be used to construct a monad $Th(-)$ that has the following properties:

- Axiom A) by eq 11¹⁴ ConTop 's sheaf ϵ is defined as 'enrichment' of any cochain A -complex of positive degree/grade, corresponding to the A -resolution of an abstract A -module, a non-negatively graded chain complex in \mathcal{A} . Thus all functors and thus monads in a Consensus category share the same subobject classifier Ω . Thus any monad in ConTop carries an abelian category given by the A -module into \mathcal{A} to the category $Ch\mathcal{A}$ of non-negatively graded chain complexes in \mathcal{A}

- Axiom B) The Protocol Complex (eq 9¹⁵), chain homotopy for successive functors σ are homotopy preserving graded abelian group morphisms with vanishing homology, which by definition satisfy the coherence conditions required by the composite functor ChF in Axiom B

- Axiom C) This is again shown by chain homotopy of (eq 9¹⁶) of the Protocol Complex

- Axiom D) By definition of the Protocol Manifold (eq 16¹⁷) as the ringed vector space formed by the direct sum of the vector subspaces of protocol sheaves. This is equivalent to the definition of a cone of a chain complex of chain maps, which is the typical definition of totalization, a direct sum of a projective resolution of a chain map¹⁸.

Next, Brauer's syntax is borrowed such that " $F : B \rightsquigarrow A$ " denotes a functor $F : B \rightarrow Ch\mathcal{A}$. For any category acted upon by a monad there is an associated Kleisli category, thus in terms of $Ch(-)$ on $AbCat$: the (large) Kleisli category $AbCat_{Ch}$, has the following properties:

- Axiom A) objects are abelian categories
- Axiom B) morphisms $\mathcal{B} \rightsquigarrow Ch\mathcal{A}$ are natural isomorphism classes of functors $\mathcal{B} \rightarrow Ch\mathcal{A}$
- Axiom C) identity morphisms $\mathcal{A} \rightsquigarrow Ch\mathcal{A}$

¹⁴b cohomology

¹⁵

¹⁶

¹⁷

¹⁸eq 110 <https://math.berkeley.edu/~qchu/Notes/253.pdf>

• Axiom D) composition of morphisms $\mathcal{C} \rightsquigarrow Ch\mathcal{B}$ and $\mathcal{B} \rightsquigarrow Ch\mathcal{A}$ corresponding to the pair of functors $G : \mathcal{C} \rightarrow Ch\mathcal{B}$ and $G : \mathcal{B} \rightarrow Ch\mathcal{A}$. is defined by

$$F \circ G : \mathcal{C} \xrightarrow{G} Ch\mathcal{B} \xrightarrow{ChF} ChCh\mathcal{A} \xrightarrow{Tot} Ch\mathcal{A} \quad (12)$$

such that the 1-category $AbCat$ defines a subcategory of $AbCat_{Ch}$ where a functor $F : \mathcal{B} \rightarrow \mathcal{A}$ is identified with the morphism $\mathcal{B} \rightsquigarrow Ch\mathcal{A}$ in $AbCat_{Ch}$ represented by the functor

$$\mathcal{B} \xrightarrow{F} \mathcal{A} \xrightarrow{deg_0} Ch\mathcal{A} \quad (13)$$

Proof of Equivalence between $AbCat_{Ch}$ and $ConTop$: Making use of the newly defined $Th(-)$ • By definition of $\mathcal{E} := Shv(\Omega_{\Gamma}^T, Op)$, \mathcal{E} is abelian as its subobject classifier Ω_{Γ}^T are A -modules of a $\mathbb{Z}+$ -graded discrete differential form.

• Axiom B) morphisms $\mathcal{B} \rightsquigarrow Ch\mathcal{A}$ are natural isomorphism classes of functors as defined by " \rightsquigarrow " and Axiom C of Th

• Axiom C) This follows from axiom C of Th

• Axiom D) This follows from Axiom D of Th , specifically the composition of two functors carrying the protocol complex has the attribute of a manifold that is defined as the direct sum over protocol sheaves, which is an equivalent definition of totality as is required. (maybe need to show again using the dfn of \rightsquigarrow but its trivial.

The general form of the abelian functor calculus is encapsulated in the universal polynomial degree-n approximations to a functor $F : A \rightsquigarrow B$. The n th polynomial approximation $P_n F : A \rightsquigarrow B$ of a $F : A \rightsquigarrow B$ is the functor that carries $X \in B$ to the totalization of the chain complex of chain complexes in A :

$$\dots C_{n+1}^{\times 3} F(X) \xrightarrow{\epsilon - C_{n+1}\epsilon + C_{n+1}^{\times 2}\epsilon} C_{n+1}^{\times 2} F(X) \xrightarrow{\epsilon - C_{n+1}\epsilon} C_{n+1} F(X) \xrightarrow{\epsilon} F(X) \quad (14)$$

A result of the proof of proposition 4.5¹⁹ provides the following factorization since $P_{n-1}F$ is also degree- n

$$\begin{array}{ccc} F & \xrightarrow{p_n} & P_n F \\ & \searrow P_{n-1} & \downarrow q_n \\ & & P_{n-1} F \end{array}$$

¹⁹<https://arxiv.org/pdf/1610.01930.pdf>

which results in the following tower of functors

$$\begin{array}{ccccccc}
 & & F & & & & \\
 & \swarrow p_{n+1} & \downarrow p_n & \searrow p_{n-1} & \swarrow p_0 & & \\
 \dots & \leftarrow P_{n+1}F & \xrightarrow{q_{n+1}} P_nF & \xrightarrow{q_n} P_{n-1}F & \xrightarrow{q_1} P_0^F & &
 \end{array}$$

which is formally the algebraic Taylor tower of F .

The linearization of $F : B \rightsquigarrow A$ is the functor $D_1F : B \rightsquigarrow A$ given as the totalization of the explicit chain complex of chain complexes (D_1F_*, ∂_*) where:

$$\left. \begin{array}{ll} C_2^{\times k} F & k \geq 1 \\ cr_1 F & k = 0 \\ 0 & \text{otherwise} \end{array} \right\} =: (D_1F)_k$$

The chain differential $\partial_1 : (D_1F)_1 \rightarrow (D_1F)_0$ is given by a map $q_n : P_nF \rightarrow P_{n-1}F$ induced by a natural transformation of comonads $\rho_n : C_{n+1} \rightarrow C_n$ of the composite of the canonical direct summand inclusion followed by the image of the fold map $X \oplus X \rightarrow X$. The chain differential $\partial_k : (D_1F)_k \rightarrow (D_1F)_{k-1}$ is given by $\sum k - 1i = 0(-1)^i C_2^{\times i} \epsilon$ when $k \geq 1$. Bauer et. al. go on to show that in the case $n=1$, the map p_1 is the counit ϵ for the component $cr_1 F$ as well as the vanishing differential required for homotopy equivalence.

Now the definition for the (first) directional derivative can be defined for abelian categories. Let $F : B \rightsquigarrow A$ be a functor of abelian categories, the directional derivative of F at X in direction of V (where $X, V \in \mathcal{B}$ is the bifunctor defined by

$$\nabla F(V; X) := D_1^V(ker(F(X \oplus V) \rightarrow F(X))) \quad (15)$$

where D_1^V is the linearization D_1 in the variable V and ker is a kernel operation $ker(F(X \oplus V) \rightarrow F(X))$ of the difference operation in the traof the calculus of functions of a real variable $\nabla f(v; x) = \lim_{t \rightarrow 0} \frac{1}{t} [f(x + tv) - f(x)]$. The directional derivative of a functor can be iterated to a higher order directional derivative in several different ways. However by making use of the n th iterated partial derivative as introduced by Johnson-McCarthy²⁰, $\nabla^n F : \mathcal{B}^{n+1} \rightsquigarrow \mathcal{A}$ the following chain homotopy equivalence allows for a generic formulation in

terms of higher order chain rule. Specifically, for any $F : \mathcal{B} \rightsquigarrow \mathcal{A}$ and objects V_n, \dots, V_1, X there is a chain homotopy equivalence

$$\Delta_n F(V_n, \dots, V_1; X) \cong \bigoplus_{\pi=\{S_1, \dots, S_k\}} \nabla^\pi F(V_n, \dots, V_1; X) \quad (16)$$

where the sum is taken over all partitions π of the set $\{1, 2, \dots, n\}$. Having established a relationship between the n th higher directional derivative and the n th iterated partial directional derivative, the directional derivative can be extended to functors $F : \mathcal{C} \rightarrow \mathcal{D}$ by using generating objects of \mathcal{C} in place of the unit $1 \in \mathbb{R}$. The canonical example of a generating object is the object R in the category of R -modules $\text{Mod } R$, where R is a commutative ring with unit. The object R is a “generating object” in the sense that all other R -modules can be obtained from finitely generated free R -modules using free resolutions and colimits. Consider the functors $F : \mathcal{M}[\nabla] \rightsquigarrow \mathcal{A}$ with $n \geq 1$ and generating object $R \in \mathcal{M}[\nabla]$ to define the following derivative of F at X

$$\frac{d^n}{dR^n} F(X) := \nabla^n F(R, \dots, R; X) \quad (17)$$

An equivalent formulation due to the relationship between the n th higher directional derivative and the n th iterated partial directional derivative is as follows

$$\nabla^n F(R, \dots, R; X) \Delta_n F(0, \dots, 0, R; X) \quad (18)$$

which expresses the derivative as a direct sum, indexed by partitions $\pi = \{S_1, \dots, S_k\}$ of $\{1, \dots, n\}$, of terms $\nabla^k F(V_{|S_1|}, \dots, V_{|S_k|}; X)$. Because $\nabla^k F$ vanishes if any of its directional variables is zero, the only partition that contributes to a non-zero summand when $V_2 = \dots = V_n = 0$ is $\{\{1\}, \dots, \{n\}\}$, the partition into one-element subsets. This proves the congruence from the other direction. Finally, these constructions will be extended to generative effects in the Consensus Topos, forming the Generative Calculus.

Definition, Generative Calculus: consider the Consensus Topos ConTop , an abelian category as shown above. A functor calculus of decoherence/deformation can be defined as an extension of the abelian functor calculus as follows. Take the chain homotopy equivalence

$$\Delta_n F(V_n, \dots, V_1; X) \cong \bigoplus_{\pi=\{S_1, \dots, S_k\}} \nabla^\pi F(V_n, \dots, V_1; X) \quad (19)$$

relating the n th higher directional derivative and the n th iterated partial directional derivative. The right hand of this equation is the definition of the Protocol Manifold, a vector representation of de Rham cohomology, a measure of how well the fundamental theorem of calculus holds, which is used to define coherence up to a given homotopy. Consider then that due to the congruence of the n th iterated partial derivative and the protocol manifold, their difference gives a measure of coherence up to homotopy. Naturally, any decoherence

forms a dual complex given by the external product between the state-manifold generated by the ideal protocol topology. This dual complex can be defined as follows:

$$\prod_{\Gamma}^T = |\Delta_n F(V_n, \dots, V_1; X) - (\bigoplus_{0 \leq i \leq \pi} \Sigma_* \epsilon_i)| = 0 = \Omega_{\Gamma}^T \quad (20)$$

where $\Omega_{\Gamma}^T = 0$ because it is the subobject. Conversely, if the normed difference (since we have congruence not equality) tends to 0,

$$\prod_{\Gamma}^T \rightarrow 0 \quad (21)$$

the system approaches coherence in the limit. Note that \prod_{Γ}^T is just Stokes theorem²¹. This means that we can actually recover traditional integration of differential forms homotopy-type theory as follows. Consider configurations states i_{n+1}, i_n of the Protocol Topology and define an interval object²² $\ast \prod \ast \xrightarrow{(i_{n+1}, i_n)}$ Δ^1 , stokes theorem formulated in cohesive homotopy-type theory is as follows

$$\int_{\Delta}^1 \circ \mathbf{d} \cong i_{n+1}, i_n \quad (22)$$

assuming the existence of a natural transformation that carries an "integration map"²³ and de Rham differential \mathbf{d} . Consider \prod as a shape modality²⁴, localization L_{Δ^1} such that

$$\prod \cong L_{\Delta^1} \quad (23)$$

which forms the "standard continuum" or the real line within a topos such as $\text{ConTop } \mathcal{E}$. These constructions are criteria of coherence for an $(\infty, 1)$ category, of which it can be trivially shown that \mathcal{E} can be extended to by the definition of directional derivative which has free resolutions and colimits²⁵) and Ω . The standard continuum has a chosen equivalence of $(\infty, 1)$ -categories between the flat modal homotopy-types and the Δ^1 -homotopy invariant homotopy-types, i.e.

$$\mathfrak{b}(\mathcal{E}) \cong L_{\Delta^1} \mathcal{E} \quad (24)$$

Given a stable homotopy type²⁶ $\hat{E} \in \text{Stab}(\mathcal{E})$, cohesion implies two objects

$$\prod_{dR} \Omega \mathcal{E}, \mathfrak{b} dR \Sigma \hat{E} \in \text{Stab}(\mathcal{E}) \quad (25)$$

²¹Stokes theorem, [https://ncatlab.org/nlab/show/integration of differential forms](https://ncatlab.org/nlab/show/integration+of+differential+forms)

²²<https://ncatlab.org/nlab/show/interval+object>

²³eq(7), <https://arxiv.org/pdf/1311.3188.pdf>

²⁴<https://ncatlab.org/nlab/show/shape+modality>

²⁵def 9.2 <https://arxiv.org/pdf/1610.01930.pdf>

²⁶<https://ncatlab.org/nlab/show/Stokes+theorem> BunkeNikolausVoelkl13

which can be interpreted as de Rham complexes with coefficients in $\prod(\flat dR\Sigma\hat{E})$, the first one restricted to negative degree, the second to non-negative degree. Finally the canonical map

$$\begin{array}{ccc} \prod_{dR} \Omega\mathcal{E} & \xrightarrow{\mathbf{d}} & \flat_{dR}\Sigma\hat{E} \\ & \searrow & \nearrow \\ & \hat{E} & \end{array}$$

interprets as the de Rham differential \mathbf{d} ²⁷ It follows that integration of differential forms in terms of homotopy-type theory is the map

$$\int_{\Delta^1} : [\Delta^1, \flat_{dR}\Sigma\Omega\hat{E}] \rightarrow \prod_{dR} \Omega\mathcal{E} \quad (26)$$

Then on this object the general cohesive integration map (above) reduces on the n-nth homotopy group to the tradition fiber integration of differential forms as above:

$$\int_{\Delta^1 \times X/X} : \Omega(\Delta^1 \times X)_{cl}^n \rightarrow \Omega^{n-}(X)/im(\mathbf{d}) \quad (27)$$

This gives nice concrete bounds in terms of limits (and colimits) which will be used in the following section to extend Generative calculus the decoherence of a topos of behavioral types.

A Note on Nonlinearity

The decoherence that \prod_{Γ}^T represents is actually a deformation in the fundamental assumptions of the system. Thus, as spaces and functions between them are introduced in the rest of the work, these formulations are realized "up to coherence" just as a category is well defined "up to homotopy". As ConTop was created as a context for analyzing Consensus Protocols, as will be shown below, the logic of each consensus protocol can be used to create a manifold of desired behavior. For traditional consensus protocols, all information is self contained within the context of the protocol; external information does not affect the outcome of consensus In these models its exception handling is essentially what will determine the coherence structure. In the ideal case, there exists a model that can be trained to identify latent structure via generative cross-effects of composed protocols in ConTop. This is the focus of a concurrent work, MEME²⁸. However, for the rest of the paper, the effect of optimizing for latent embedding will be limited to incorporation of deformation of the coherence complex into calculation of temporal logic.

²⁷de Rham differential

²⁸

The coherence complex and its functional are representations of geometric deformation or distortion with respect to a deterministically expected distribution given by the protocol in ideal conditions. Information entropy can be used to quantify this deformation generically, in terms of relative information gain

$$B_{\text{Entropy}} = \sum_{i \in \{1, \dots, r\}} \int \rho_i H_i \omega.$$

where $H_i(p) = -\frac{1}{\log_b(i)} \sum_j p_j \log_b(p_j)$ is the normalized Shannon entropy, where p is a discrete probability measure of how the result of a node's actions deviate from the accepted state of the protocol and b is our base. The later is binary, as all data types can be decomposed into binary. Reduction in entropy can thus be seen as a measure of efficiency. Normalized entropy is advantageous as it scales with sample size and has shown effective at anomaly detection in networks. In proceeding sections, we will determine a norm/normalization function that allows for the proper metric calculation of coherence/decoherence as is common in the field of error correction codes. As will be shown, the norm will be defined in terms of the type hierarchy of the subobject classifier Ω and the successive exponentiation operators on sheaves within the hierarchy.

Morse Smale Flows and Steady States

Let $f : X \rightarrow R^n$ define a vector field on some state space X . Then, roughly speaking, this system is structurally stable if small perturbations in the function f do not change the topological structure of the vector field $\dot{x} = f(x)$. We can then think of a perturbation of f as being a choice of any function in some ϵ -ball around f . Topological equivalence in the context of vector spaces is defined in terms of a theory of flows. Roughly speaking the flow of two dynamical systems on D^n are topologically equivalent if there is a homeomorphism $h : D^n \rightarrow D^n$ that carries the orbits of one flow onto the orbits of the other. We can think of this homeomorphism as being some continuous change of co-ordinates, so that topological equivalence of two flows just means that we can find a continuous change of coordinates so that one flow looks like the other. Finally we define the concept of structural stability. A dynamical system $\dot{x} = f(x)$ on D^n is structurally stable if there is some neighborhood U such that for every function g in that neighborhood, the flow induced by $\dot{x} = g(x)$ is topologically equivalent to the flow of f . Loosely speaking, a dynamical system is structurally stable if small perturbations in the underlying function f do not change the qualitative nature of the flow.

By using the cw-complex of ConTop , we can show that Cells are subject to morse-smale gradient-like flows²⁹ and the perturbation equations are defined in terms of stable foliation. We will thus define the steady state criteria for

²⁹<https://arxiv.org/pdf/2003.07134.pdf>

ConTop by showing it is a valid morse-smale evolution process, or rather in terms of the nonautonomous perturbations of autonomous ODEs³⁰. Fixed point theorems are useful for establishing the existence of solutions to a system of nonlinear equations and we will take the fixpoints of the GAS lawvere theory to define these ODEs.

According to THEOREM 4.1³¹ any sub-complex in the cw complex of the poincare protocol has a morse-smale vector field gradient-like with respect to a new morse function, thus it follows for all cells in ConTop. The cell-homotopy equivalence of the poincare protocol complex gives the inequality required by theorem 4.4 to define a Morse-Smale flow on M whose associated CW complex is ceil equivalent to Y. Note also that the reRham complex that forms the protocol manifold define hyperbolic spaces and the global evolution "tetrad" which is compatible with a global evolution process³². The semiflow given by eq 13 in Proposition 1 is equivalent to the temporal logic of behavior types Θ above. Consider the structural stability of the global attractor (A-stability) of $H_k(M, \Omega)$

$$A_\mu = [Q_{\mu+\hat{d}} - Q_{\mu-d}]A[Q_{\mu+\hat{d}} - Q_{\mu-d}] \quad (28)$$

where $Q_{\mu+\hat{d}}$ and $Q_{\mu-d}$ denote the spectral projections associated with the parts of the spectrum $\sigma(A) \cap \{Re(z) > \mu - d\}$ and $\sigma(A) \cap \{Re(z) > \mu + \hat{d}\}$.

Then, for e^A that admits shifted dichotomy with gap $[e^{\mu+\hat{d}_1}, e^{\mu+d^*}]$, for some $d^* > \hat{d}$ there exists a non-vanishing solution $U_{+\infty}(t), t \in \mathbb{R}^+$ (resp. $U_{-\infty}(t)$) in $R(Q_{\mu+\hat{d}} - Q_{\mu-d})$ and satisfying further convergence criteria via the limit of the cone on the cospan algebra

$$\partial_t U_{+\infty}(t) = A_\mu U_{+\infty} \text{ (resp. } \partial_t U_{-\infty}(t) = A_\mu U_{-\infty}) \quad (29)$$

$$\|U(t) - U_{+\infty}(t)\|_X = O(e^{(\mu-d)t}), t \rightarrow +\infty \quad (30)$$

$$\text{(resp. } \|U(t) - U_{+\infty}(t)\|_X = O(e^{(\mu-d)t}), t \rightarrow +\infty) \quad (31)$$

Moreover by Theorem 4.6.6³³ and the definition of the morse relation for protocol homotopy, ConTop admits α -Morse-Smale flow, which is a flow carrying a cohomology class $[\alpha]$ on X, a compact polyhedron with a metric d . For the case of linearized operators, such as Dirichlet forms or autonomous systems generating a C_0 -semigroup of bounded linear operators in X and let $g \in C^1(Y, X)$. We consider either the finite dimensional case $Y=X=\mathbb{R}$ nor, in infinite dimensions, the case of L sectorial and $Y = X^\alpha$, the fractional power space of L with appropriate $\alpha \in (0, 1)$. We denote by $Ce(R, C^1(Y, X))$ the metric space of continuous functions $f = f(t, z)$ uniformly Lipschitz continuous

³⁰<https://www.researchgate.net/publication/316259096> morse smale evolution processes

³¹<https://core.ac.uk/download/pdf/82133247.pdf>

³²<https://www.researchgate.net/publication/316259096> morse smale evolution processes

³³<https://arxiv.org/pdf/math/0010295.pdf>

for $t \in \mathbb{R}$ and differentiable in z with uniform e -bounded C^1 -norm. Let z_0 denote the hyperbolic equilibrium of the autonomous system

$$\dot{z} = Lz + g(x) \quad (32)$$

Then for $f_e \in C_e(\mathbb{R}, C^1(Y, X))$ the non-autonomous perturbed equation

$$\dot{z} = Lz + g(x) + f_e(t, z) \quad (33)$$

Let $T(t, \tau), t \geq \tau$ denote the family of evolution operators on X generated by the linearization of \dot{z} around ζ_0 , that is $T(t, \tau)z_0 = z(t, \tau, z_0)$ for $z_0 \in X$ where $z(t) = z(t, \tau, z_0), t \geq \tau$ solves

$$\dot{z} = Lz + g_z(\zeta_0(t))z, z(\tau) = z_0 \quad (34)$$

The characteristic multipliers of $\zeta_0(t)$ are the nonzero eigenvalues of the Poincare map

$$U(t) = T(t + \omega, t) \quad (35)$$

We also let Mnh_f denote the set of all normally hyperbolic isolated invariant manifolds M_f^T satisfying the following: 1) M_f^T are fibered by graphs of partially hyperbolic solutions of $Sf(\cdot, \cdot)$ possessing exponential trichotomy with two dimensional center manifold 2) for each $t \in R$ the natural B-projection of the t -section of M_f^T (which is in $A_f(t)$) is homeomorphic to a circle For each tube M_f^T there exists two manifolds: 1) the unstable manifold $W^u(M_f^T)$ 2) the local stable manifold $W_{loc}^s(M_f^T)$ The Cell Complex of the Poincare Protocol is a Simple Foliation³⁴ which is equivalently defined in terms of the chain homotopy and trivially equivalent to the Fredholm complex³⁵ via the Laplacian. Thus, the convergence for the strong unstable manifold is

$$\lim_{n \rightarrow -\infty} \|v(n)\|_{H^s}^{1/n} = |\rho_i| = |\mu_i| \quad (36)$$

and for the strong stable manifold is

$$\lim_{n \rightarrow -\infty} \|v(np)\|_{H^s}^{1/n} \quad (37)$$

in terms of $v(t) \equiv u(t) - \gamma(t)$ is a classical solution of the system of differential equations \dot{z} .

Thus, the structural stability of the global attractor (A-stability) of $H_k(M, \Omega)$ can be described in terms of the path integral functional

$$\int \langle \zeta | \tau \rangle = \sum_{i \in \{1, \dots, r\}} \int \rho_i H_i \omega = \|G(t)\|_{L(Y^\alpha, Y)} \leq C e^{-C|n|} \quad (38)$$

³⁴<https://ncatlab.org/nlab/show/simple+foliation>

³⁵<https://ncatlab.org/nlab/show/Fredholm+operator>

where $X = Y^\alpha$ is a fractional space and equivalent to the Type Tower defined for the directional derivative. If $\alpha = 0$ it suffices to assume that A is the generator of a C_0 -semigroup. Note that

$$\|G(t)\|_{L(Y^\alpha, Y)} = \|U(t) - U_{+\infty}(t)\|_X \leq C e^{-C|n|} \quad (39)$$

is a reformulation of the freedholm equation

$$g(t) = \|\phi(t) - f(t)\| = \int_b^a K(t, s) f(s) ds \quad (40)$$

where the kernel function K is a function only of the difference in its arguments (and the limits of integration are $\pm \infty$) the right hand side of the equation can be rewritten as a convolution of the functions K and f and therefore, formally, the solution is given by

$$f(s) = F_\omega^{-1} \left\langle \frac{F_t[g(t)](\omega)}{F_t[K(t)](\omega)} \right\rangle = \int_{-\infty}^{\infty} \frac{F_t[g(t)](\omega)}{F_t[K(t)](\omega)} e^{2\pi\omega s} d\omega \quad (41)$$

where F_t, F_ω^{-1} are the direct and inverse Fourier transforms, respectively. Since F_t, F_ω^{-1} are given by the day convolution in the Cellular construction of the Coherence Complex and the i 'th laplace operator for a complex d^\bullet is $\Delta_i = d_i^* d_i + d_{i-1} d_{i-1}^*$ and d_{i-1}^*, d_i^* are the adjoints of d_i, d_{i-1} , Hodge theory holds for the subset of complexes where Δ holds³⁶.

Hodge theory holds up to homotopy by the self-adjointness of the de Rham complex of the protocol manifold as the Morse complex is isomorphic to the de Rham complex. Thus we arrive at the spectral theorem for Hilbert spaces and normal linear operators (A is normal iff $A^\dagger A = A A^\dagger$)

$$A = \sum_j \lambda_j |j\rangle \langle j| \quad (42)$$

where the spectral space of A is given by the outer or wedge product given by $|j\rangle \langle j|$ and its eigenvalues of the eigenvectors of define the steady state criteria in terms of Lyapunov exponents³⁷. Now if we choose a proper Riemann metric, namely the Fisher information metric, we see the other side of the path integral formulation, namely information gain in terms of Gibbs free energy. The action of a curve on a riemannian manifold is understood to give the change in free entropy of a system as it moves from time a to time b ³⁸. We finally arrive at the vector space representation of stability in terms of an Escape function of anisotropic Sobelov Spaces.

Four our hilbert space construction of A , introduce an anisotropic Sobolev space of currents and define a fullasymptotic for the correlation function. By

³⁶<https://arxiv.org/pdf/1506.06244.pdf>

³⁷def 1.2 <https://core.ac.uk/download/pdf/82133247.pdf>

³⁸<https://arxiv.org/pdf/0706.0559.pdf>

Prop 7.8³⁹ the 'duality map' of ρ_f^{-t*} is the external wedge product of A. Using the conventions of [22], one can define the Fourier transform as follows

$$\prod \det(\prod k)_\Lambda (\mathcal{L}_{V_f}^{(k)} + z) \prod k)_\Lambda)^{(-1)^k} = z^{\chi^{(M)}} \quad (43)$$

which show the connexion to current near a critical point and the duality map is locally near a equal to F up to some normalizing constant depending on n and k. Let ρ_f^{t*} be a Morse-Smale gradient flow all of whose Lyapunov exponents are rationally independent. Then, one has, for every $\Lambda > 0$ and for every z in \mathbb{C}^*

$$\prod \det(\prod k)_\Lambda (\mathcal{L}_{V_f}^{(k)} + z) \prod k)_\Lambda)^{(-1)^k} = z^{\chi^{(M)}} \quad (44)$$

where $\prod k)_\Lambda$ is the spectral projector and det is the standard determinant.

Cell Complex of Triangulated Generative Effects

The Generative calculus can be reformulated in terms of the Day convolution, which greatly simplifies the correspondence between Behavioral Types and calculus of functors by reducing the mechanics to the tensor product of monoids. For those who like the analogy between functors and containers, Day convolution may be understood as containing a box of xs and a bag of ys, plus a binary combinator for turning every possible pair (x, y) into an a⁴⁰. Another fundamental motivation is that the categorical equivalent of the Day convolution is the of fourier transform⁴¹ as the fourier transform of distributions interchanges convolution of distributions with pointwise product⁴², which is how this will ultimately be applied, in reformulating the mathematical theory of arbitrage. Without ado, lets form a convolutional construction of the Generative calculus which will be used throughout the rest of the paper.

Every topos \mathcal{H} is canonically a cartesian monoidal category (\mathcal{H}, \times) , with the tensor product being the cartesian product. If in addition to this canonical product \mathcal{H} is equipped with another noncartesian monoidal category structure \otimes , then (\mathcal{H}, \otimes) might be called a monoidal topos. Such monoidal toposes appear as categories of local action functionals in the context of motivic quantization. Consider the fact that by definition⁴³, \prod_{Γ}^T is an ∞ -representation, an ∞ -action of some higher algebraic structure on some object in a higher category up to coherent homotopy and that an A-infinity-space is "deloopable" via the derived

³⁹<http://math.univ-lyon1.fr/homes-www/dang/Dang-Riviere-gradient-flow-2018.pdf>

⁴⁰<https://bartoszmilewski.com/2018/02/17/free-monoidal-functors/>

⁴¹baez blog

⁴²<https://ncatlab.org/nlab/show/convolution+product+of+distributions>

⁴³<https://ncatlab.org/nlab/show/infinity-representation>

∞ -category⁴⁴ and hence homotopy equivalent to a loop space⁴⁵. The groupoid object for a category in ConTop is given by colimit of the right derived functor of global sections in the construction of the Protocol Manifold’s de Rham complex⁴⁶ which has a natural inverse via the inversion map of the Protocol Topology⁴⁷. Thus for ConTop acquires the following day convolution tensor product of graded objects⁴⁸

$$(X^* \otimes Y^*)^n \cong \coprod_{i+j=n} X^i \otimes Y^j \cong \text{colim}_{i+j \geq n} X^i \otimes Y^j \cong \prod_{\Gamma}^T \quad (45)$$

where $X, Y \in \mathcal{E}$. Further note that a pullback of functions along this map makes an involution of the convolution algebra of \mathcal{E} or equivalently that it is a star category⁴⁹

To provide semantics for a logical system means to provide a compiler that converts each logical statement in the formal language into a mathematical statement about particular sheaves and their relationships. A computer can carry out logical deductions without knowing what any of them “mean” about sheaves. We say that semantics is sound if every formal proof is converted into a true fact about the relevant sheaves. Every topos can be assigned a formal language, often called its internal language, in which to carry out constructions and formal proofs. This language has a sound semantics—a sort of logic-to-sheaf compiler—which goes under the name categorical semantics or Kripke-Joyal semantics (see 7.4.6 in 7 sketches)

ConTop is a special topos in that it is constructed synthetically such that its dual cohomology directly maps logic of the $\mathbf{s} \Omega$ to the spaces of differential forms. This means that the logic of behavior types can directly incorporate geometric representation of decoherence into conserved metrics. ConTop can thus be reformulated in terms of Behavior types using the Day Convolution Construction, resulting in a computable cellular lattice. A property further explored in this reformulation is the ability for the subobject classifier Ω to define categorical semantics, which recursively assign interpretations to its types and terms. It will be shown that behavioral effects are decidable relative to a global behavior that is given by the interval domain.

Spivak et. al. define the translation invariant topos \mathcal{B} of behavior types as

$$\mathcal{B} := Shv(\mathcal{S}_{\mathbb{R}/\triangleright}) \quad (46)$$

or equivalently as the category of sheaves of sites obtained as the quotient of \mathcal{IR} by a free \mathcal{R} -action of the interval domain $\mathcal{S}_{\mathbb{R}/\triangleright}$. The interval domain can be

⁴⁴<https://amathew.wordpress.com/2012/07/14/understanding-the-derived-infinity-category/>

⁴⁵<https://ncatlab.org/nlab/show/delooping>

⁴⁶eq 13, b cohomology

⁴⁷B cohomology

⁴⁸def 3.1 <https://arxiv.org/pdf/2007.02576.pdf>

⁴⁹<https://ncatlab.org/nlab/show/category+algebra>

constructed for ConTop by making note that it is a hypergraph category, which is compatible with the category *Set* via the theory of decorated cospans. By the Day formulation of the coherence complex, there exists a monoid with tensor that Frobenius structure as it is homotopy equivalent to a loop space via its derived category and its braiding satisfies the Frobenius laws. As a hypergraph category it naturally has a Cospan algebra⁵⁰. By theorem 6.77 for a category with finite colimits and a symmetric monoidal functor there is a hypergraph category Cospan from which the symmetric monoidal and hypergraph structures are derived from. The category *Set*, a requirement for the interval domain \mathbb{IR} , can be mapped to via the functor $Gens : Hyp_{OF} \rightarrow Set_{List}$.⁵¹ which is a split Grothendieck fibration and where *OF* means objectwise-free. By corollary 3.15⁵² $gens$ is the right adjoint to the functor $Cospan_- : Set_{List} \rightarrow Hyp_{OF}$ and is given by sending an *OF*-hypergraph category $(\Lambda, \mathcal{H}, i)$ to the set Λ of generators. For any Hypergraph \mathcal{H} and $Cospan_\lambda$, the free hypergraph category on an arbitrary set Λ , there is a cospan-algebra $\mathcal{A}_\mathcal{H}$ such that if \mathcal{H} is an objectwise-free category, there exists a lax monoidal functor $L : Cospan_\Lambda \rightarrow Set$ which can map to the category of sets⁵³. The derived category for \mathcal{E} is continuous by definition of the coherence criteria, meaning that the existence of L is proof of theorem 2.27 by item 4⁵⁴, which implies that $\mathcal{E} \cong \mathcal{B}$. Thus, internal semantics of \mathcal{E} can be used to describe behavior types.

A topos of behavioral effects can be described in terms of a space called the interval domain. The interval domain \mathbb{IR} is a topological space used to model intervals of time. A category-theoretic description of behavior types is as follows: for every time window, of length l , a behavior type \mathbb{B} is responsible for providing a set $\mathbb{B}(l)$ of all behaviors, called "length- l sections" of \mathbb{B} , that can possibly occur over this time window. And for every inclusion of one time window into another, the behavior type \mathbb{B} is responsible for providing a restriction map that restricts each long behavior to the shorter time window. We say a behavior type has composable sections when, for any two overlapping time window, behaviors over the first that match behaviors over the second can be glued to form a behavior over the union time window. The goal is to prove properties of systems or what can possibly occur when multiple components—each with their own type of behavior—interact in any given way. If we know something about the behavior of each component—if each component has a behavior contractor guarantee that specifies something about how it will behave among all its possibilities—then we may be able to guarantee something about how the entire system will behave. This is relevant to industries in which different suppliers provide different parts, each with its own behavioral guarantee. In such a setting, one still wants to draw conclusions about the system formed by arranging these components so that they interact in some specified way. Behavioral types provide a language

⁵⁰4.1 <https://arxiv.org/pdf/1806.08304.pdf>

⁵¹Proposition 3.20. <https://arxiv.org/pdf/1806.08304.pdf>

⁵²<https://arxiv.org/pdf/1806.08304.pdf>

⁵³lemma 4.8 <https://arxiv.org/pdf/1806.08304.pdf>

⁵⁴<https://arxiv.org/pdf/1710.10258.pdf>

for proving properties of interconnected dynamical systems, broadly construed.

When proving that a type signature is sound in a topos \mathcal{E} , one must give \mathcal{E} -interpretations to each type, term, and predicate in the type theory. To do so, one first assigns an object of \mathcal{E} to each atomic type and a morphism of \mathcal{E} to each atomic term. Recall that predicates in the type theory are identified with terms of type *Prop*. One thus assigns a morphism, whose codomain is the subobject classifier $\Omega_{\mathcal{E}}$, to each atomic predicate. Given a modality, a term of type $\text{Prop} \rightarrow \text{Prop}$ satisfying definition 4.5⁵⁵, in any topos, a modality is an internal monad on *Prop*, considered as an internal poset. By definition 5.38, For any modality j , a j -closed proposition P is j -decidable if $P \vee (P \implies j \perp)$ holds. Using categorical semantics, the remaining types and terms are then recursively assigned interpretations. As ConTop is a valid translation invariant topos, Kripke-Joyal sheaf semantics can be constructed for the subobject classifier Ω as defined by table 6.1. A system of ordinary differential equations entirely within the internal language of the topos. A System with a differential relation or a differential inclusion as a differential relation is a predicate $P : (\mathbb{R}_{\pi})^{2n+m} \rightarrow \text{Prop}$ whose solution set is

$$\{(x, a) : (\mathbb{R}_{\pi})^n \times (\mathbb{R}_{\pi})^m \mid P(x, \dot{x}, a)\} \quad (47)$$

when $P(x, \dot{x}, a)$ is taken as the proposition $x' = f(x, a)$, requiring derivatives to remain within certain bounds.

A machine inhabits an interface, and it has its own behavior type, which we call the total behavior type, as well as a map to the each port's behavior type. A behavior contract on an interface S_1, \dots, S_n is a predicate on $S_1 \times \dots \times S_n$. We prefer to think of it as a proposition in context $\Gamma = (s_1 : S_1, \dots, s_n : S_n)$. A labeled transition system can be interpreted in the temporal type theory within the framework of hybrid sheaf formalism. We want to interpret a labeled transition system as a machine or processes within machines, in the sense of section 4.1. In order to construct a behavior type for the ports I and O , as well as the total behavior type of the machine, we must decide on what that behavior will be. In other words, we need to choose a way to incorporate the components of Definition 8.17 into a temporal story of the type of behavior it can exhibit. Consider the following story describing the dynamics of the Poincare protocol:

Signals—in the form of Fibers—are appearing on the port(s) I of a Cell process. There are two Cell processes: L_1, L_2 . Each Cell is receiving these Fibers at arbitrary moments in time. Each Cell is almost always in some state $\nu \in \mathcal{E}$; the only exception is that each time an input Fiber $l \in \Lambda$ appears, the Cell goes into an instantaneous transition e , namely one with label $\lambda(e) = l$ and source $s(e) = \nu$. Immediately afterwards, it is in the target state $t(e)$. Whatever state the Cell is in, it outputs its state $\forall \epsilon$ continuously (we will show that this output is a hypergraph).

⁵⁵<https://arxiv.org/pdf/1710.10258.pdf>

There are two Fibers: Transactions t and Blocks b corresponding to L_1, L_0 respectively. Each Fiber is a sheaf in a sequence of sheaves called an address with poset topology. Fibers each have "parent references" p which are cryptographic hashes of preceding Fibers, with the following predecates $p_t := p(t - 1)$ and $p_b := p(b \leq b)$. A Fiber is either True or False iff its parent references satisfy the above Prop. Fibers can further be differentiated by an enrichment on Ω , yielding types of colored operads defined in terms of ϵ of ConTop. Each Fiber type has a corresponding Cell color $i \in \epsilon_j \subseteq \Omega$, which corresponds to the nerve of each subcategory in \mathcal{E}

From the above story, we should take the input behavior type l to be that of walks through the graph $E \rightrightarrows \{*\}$ ⁵⁶ where the hybrid sheaf datums

$$Time \xleftarrow{ptime} E \times Time \xrightarrow{dop_E, cop_E} V \quad (48)$$

which are the projections. Note that these projections are precisely the definition of the cospan algebra of the hypergraph representation of \mathcal{E} ; this can be used to extend I to walks on a hypergraph by refining the projections by the colimits of the cospan algebra. For the sheaf of walks W_G in Graph $G(inSet)$ the type W'_G is π -separated, which by proposition 8.3 and corollary 5.54 implies that it is decidable and functorial. A sheaf of timed random walks describing this system of \mathcal{E} temporal logic can be constructed from W_H in hypergraph $H(inHyp)$ using the hybrid type construction and cospan algebra. Fix $0 \leq a \leq b$; suppose we want random walks through H whose time between transitions is required to be between a and b . For H defined as

$$H \rightrightarrows_{x,y,z} E \rightrightarrows_{x,y} V \quad (49)$$

let $Gens : Hyp_{OF} \rightarrow Set_{List}$ be a generator of a hypergraph defined by cospan algebra of ConTop, By theorem 3.22⁵⁷ there exists a functor $U : Hyp_{OP} \rightarrow Hyp$ that is a 2-equivalence and surjective, implying that every hypergraph category is hypergraph equivalent to an objectwise-free hypergraph category. for H an OF hypergraph category with $\Lambda = Gens(H)$ there is an identity-on-objects hypergraph functor $Frob : Cospan_\Lambda \rightarrow Set$ such that the set of maps out of the monoidal unit $I \in H$ defining a lax symmetric monoidal functor

$$A_H : Cospan_\Lambda \rightarrow Set \quad (50)$$

$$A_H(-) := H(I, Frob(-)) \quad (51)$$

which yields a functor

$$A_- : Hyp_{OF}(\Lambda) \cong Lax(Cospan_\Lambda, Set) \cong CospanAlg \quad (52)$$

where Cospan

$$\begin{array}{ccc} & Cospan & \\ Frob \swarrow & & \searrow Frob' \\ \bullet & \xrightarrow{F} & \bullet \end{array}$$

⁵⁶Section 8.1.2 <https://arxiv.org/pdf/1710.10258.pdf>

⁵⁷<https://arxiv.org/pdf/1806.08304.pdf>

which by diagram (29) maps to Set^{58} . Thus there is a hypergraph category $\text{GraphCospan} \cong G$ which for an $(0, \infty)$ -graph $(N, E, s, t, r)^{59}$ is carried by functor

$$Graph : (finSet, +) \rightarrow (Set, \times) \quad (53)$$

taking a finite set N to the set $Graph(N)$ of $(0, \infty)$ -graphs (N, E, s, t, r) with set of nodes N . Morphisms of this functor take a function $F : N \rightarrow M$ to the function that pushed labelled graph structured in a set N forwarded onto the set M :

$$Graph(f) : Graph(N) \rightarrow Graph(M); (N, E, s, t, r) \mapsto (M, E, f \circ s, f \circ t, r) \quad (54)$$

note that this is a functional for the coherence complex. As this map simply acts by post-composition, the map Graph is trivially functorial. Finally define the lax braided monoidal functor (Graph, ζ) by equipping this functor with the natural transformation

$$\zeta_{N,M} : \text{Graph}(N) \times \text{Graph}(M) \rightarrow \text{Graph}(N + M); \quad (55)$$

$$((N, E, s, t, r), (M, F, s', t', r')) \mapsto (N + M, E + F, s + s', t + t', [r, r']) \quad (56)$$

together with the unit map

$$\zeta_1 : 1 = \{\cdot\} \rightarrow Graph(); \quad (57)$$

$$\cdot \mapsto (\cdot, \cdot, !, !, !) \quad (58)$$

where $[r, r']$ are the copairing of the functions r and r' . The naturality of this collection of morphisms, as well as the coherence laws for laxbraided monoidal functors, follow from the universal property of the coproduct. Thus, it has been proven that $ConTop \cong GraphCospan$. Further, for an object $X \in [\mathcal{E}, Top_{cg}^*]$ define an equivalent structure to the coherence complex, namely the Cell Complex:

$$Cell(\Omega, \otimes_{\Gamma}^T)_n = \int^{c1, c2} \Omega(x_1 \otimes x_2) \wedge X_{n_1} \wedge X_{n_2} = \coprod_{n_1+n_2=n} (X_{n_1} \wedge X_{n_2}) \quad (59)$$

which is computed as the left kan extension for $X, Y \in \mathcal{E}$

$$Cell(\Omega, \otimes_{\Gamma}^T) = X \otimes_{Day} Y \cong Lan_{\otimes_{\mathcal{E}}} (X \wedge Y) \quad (60)$$

This tensoral construction is equivalent to the coherence complex and carries the external product laws of de Rham cohomology, as it follows easily from Definition 2.2⁶⁰ that the Day convolution commutes with colimits in each variable. So we can take the homotopy colimit as $L \rightarrow \infty$ yielding

$$\Delta_n(-)(x_1, \dots, x_n) \cong \Delta_1(-)(x_1) \otimes \cdots \otimes \Delta_1(-)(x_n) \quad (61)$$

⁵⁸<https://arxiv.org/pdf/1806.08304.pdf>

⁵⁹5.1 <https://arxiv.org/pdf/1502.00872>

⁶⁰<https://arxiv.org/pdf/1801.03467.pdf>

which is an equivalent involutive (negative graded) definition of first order functor calculus of abelian groups and which carries through for the n th order

$$\partial_n F(\Sigma^\infty x_1, \dots, \Sigma^\infty x_n) \cong \Delta_n F(x_1 \dots x_n) \quad (62)$$

via proof of theorem 2.4⁶¹

Finally, the story above can be defined as temporal logic of a labeled transition system for hypergraphs. Semantically, a walk of length l is a finite path in this graph, which is just a list of elements of $H \rightrightarrows Cell \rightrightarrows *$, together with a positive duration of time between each. For example, if $H = \{\epsilon_{0,0} \dots \epsilon_{0,0}, \dots \epsilon_{i,0} \dots \epsilon_{i,0}, j\} \forall \epsilon_i \in \Omega, j \in \Lambda$ then perhaps we could write

$$Cell_\nu(\epsilon(0)) \quad Cell_{\nu+1}(\epsilon(i-1)) \quad Cell_{\nu+2}(\epsilon(i-2)) \quad (63)$$

where ν and i correspond to the enrichment of \mathcal{E} and the i 'th cohomology group from the protocol topology, to denote a certain configuration of fibers. Define the output behavior O to be that of walks through the hypergraph $H \otimes H \rightrightarrows H$ which is a hypergraph with transitions across hypersurfaces determined by the enrichment of the left adjoint homology functor. A Cell inhabits interfaces, which mark the boundary between system (other Cells) and the environment (exogenous system). A Cell inhabits an interface, and it has its own behavior type, which we call the total behavior type, as well as a map to the each port's behavior type as well as a map to the each port's behavior type. These port maps are given by the lawvere theories of gather apply scatter and we already know by definition that they preserve colimits.

We can now construct the behavior contract for H which we shall name Convergence, as the contract for timed random walk for hypergraphs:

$$H \times \{(\nu, r, t) : \nu \times \mathbb{R} \times Time | (\forall \nu, (a < b < |\nu|) \wedge (-r < t < b-r))\} \rightrightarrows_{src, tgt} E \times \{t : Time | 0 < t < b\} \quad (64)$$

where $|\nu| = \prod_{E \in \nu} E * \aleph$ and \aleph is the average time it takes to forge a cryptographic

hash function with \aleph many signatures; note that later we will see \aleph is similar to a torsor, but more sophisticated allowing both translations and dilations (whenever you start with a ring⁶². This can be translated directly as: for all Cells whose output is H , the output verifies "convergence" or decidability that the system of Cells will in the limit agree upon the output H and that a measure of safety can be calculated in terms of the time it takes to forge \aleph and the time between state transitions. Finally, we can show that Cell inhabits the interface with the Convergence Props by giving maps for IO with the following

⁶¹<https://arxiv.org/pdf/1801.03467.pdf>

⁶²<https://math.ucr.edu/home/baez/torsors.html>

commutative diagram:

$$\begin{array}{ccccc}
 H' & \longrightarrow & H/\nu & \longrightarrow & E \wedge E \\
 \downarrow & & \downarrow & & \downarrow \\
 E' & \longrightarrow & E & \xrightarrow{(s,t)} & V \times V \\
 \downarrow \scriptstyle !! & & \downarrow \scriptstyle s \quad t & & \downarrow \scriptstyle pr_1 \quad pr_2 \\
 \{*\} & \xleftarrow{\scriptstyle !} & E & \longrightarrow & V
 \end{array}$$


Finally, Cell coherence is calculated using the definition of GraphCospan but with monoid addition and will be extended in the next section to define safety proofs for \mathcal{E} .

Spiders of Triangulated Hypergraph Categories

Hypergraph categories are self-dual compact closed categories, if we define the cup and cap to be

$$\begin{array}{c} \cup \end{array} := \begin{array}{c} \bullet \text{ --- } \bullet \end{array} \begin{array}{c} \cap \end{array} \quad \text{and} \quad \begin{array}{c} \cap \end{array} \begin{array}{c} \cup \end{array} := \begin{array}{c} \bullet \text{ --- } \bullet$$

Thus we can connect the cup and cap to the following spider diagram

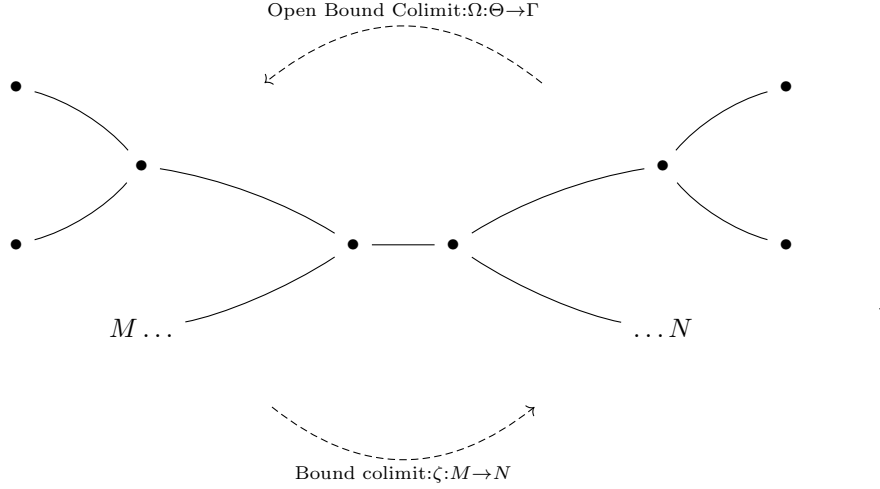

which show the relationship between the cocone of the system diagram in terms of a symmetry map $\omega : X^{\otimes 2} \rightarrow X^{\otimes 263}$ using composition and the monoidal product, and such that the string diagram of a map $f : X^{\otimes M} \rightarrow X^{\otimes N}$ has only one connected component and is a spider $f = s_{m,n}$.

The Path Integral Formulation

A closed form solution for open systems described by the Cell complex can be defined by a path integral or in terms of the path of least action for forming protocol complex. The ‘twisted symplectification’ S^t , an application of the functor S followed by the isomorphism \overline{id}_X of a standard symplectic space with its conjugate., gives the following relation⁶⁴

$$S_{\uparrow}^{op}(Graph(dP)) = Graph(dQ) \quad (65)$$

where $\uparrow : \partial N \rightarrow N$ is an injection, and let P be a Dirichlet form on N and $Q = \min_{N \partial N}$. The open system description for ConTop can be described by the following cohomology theory of information-theoretic entropy⁶⁵:

$$H_n(x_1 \dots x_n; P_N) = U(x_1 \dots x_n; P_N) - G(x_1 \dots x_n; P_N) \quad (66)$$

which can be understood as the sum over all paths, the sum over informational histories; the classical, discrete and informational version of the path integrals in statistical physics. We call the first-dimension mutual-information component

⁶³thm 6.55, 7 sketches

⁶⁴theorem 6.51 <https://math.ucr.edu/home/baez/>

⁶⁵<https://www.mdpi.com/1099-4300/21/9/881/htm>

$U(X_1, \dots, X_n; P_N)$ the self-information or internal energy, in analogy to usual statistical physics and notably Discrete Fourier Transform Clearly H_n has the same structure as the coherence complex \prod_{Γ}^T and thus the ideal system potential U corresponds to the laplacian and G corresponds to the directional derivative formulation which carries the actual state of the system. Free-information-energy integrates over the simplicial structure of the whole lattice of partitions over degrees $k \geq 2$ (which is guaranteed for the simplest Ω , namely L_0, L_1). Thus, we arrive at the path integral formulation of the Coherence Complex's Cellular lattice by re-defining as a Complex System⁶⁶ as follows. Define the set of all maximal positive information paths that forms a simplicial complex X^{+d} , the minimum free energy complex. A necessary condition for this complex not to be a simplex is that its dimension is greater than or equal to four, which is guaranteed as $d = 2(L_0 + L_1) = 4$ We can define X^{+d} for Cell out of the principle of minimum power. Consider the power minimization

$$\frac{\partial P(\rho)}{\partial \rho(n)}|_{\rho=\phi} \sum_{t(e)=n} I(e) = \sum_{t(e)=n} I(e). \quad (67)$$

we have

$$H_n(x_1 \dots x_n; P_N) - (U(x_1 \dots x_n; P_N) - G(x_1 \dots x_n; P_N)) = \sum_{t(e)=n} I(e) - \sum_{t(e)=n} I(e). \quad (68)$$

$$\sum (-1)^i \sum I_i(X_I; P) - (U(x_1 \dots x_n; P_N) - G(x_1 \dots x_n; P_N)) = \sum_{t(e)=n} I(e) - \sum_{t(e)=n} I(e). \quad (69)$$

and hence

$$\sum (-1)^i \sum I_i(X_I; P) = (U(x_1 \dots x_n; P_N) - \sum_{t(e)=n} I(e)) + (\sum_{t(e)=n} I(e) - G(x_1 \dots x_n; P_N)). \quad (70)$$

which is equivalent to the path integral alluded to in the Notes on Nonlinearity

$$U(x_1 \dots x_n; P_N) - \sum_{t(e)=n} I(e) + (\sum_{t(e)=n} I(e) - G(x_1 \dots x_n; P_N)) = \int \langle \zeta | \tau \rangle = \sum_{i \in \{1, \dots, r\}} \int \rho_i H_i \omega \quad (71)$$

where $H_i(p) = -\frac{1}{\log_b(i)} \sum_j p_j \log_b(p_j)$ is the normalized Shannon entropy. This will be used to develop the steady states equilibria.

General Stability of C^* Hilbert Bundle via Diffusion Map

Hypergraph categories have comult and counit making the markov categories <https://arxiv.org/pdf/1908.07021.pdf> We also know that due to the use of Fisher

⁶⁶def 9

information metric, it is Basis Markov⁶⁷ and separable along the dimension of its enrichment ν , the dimension of the path integral formulation of the cohomology complex. This gives added flexibility to "mix" the probability spaces of different state channels in ConTop while still ensuring "separability" which allows for Markov the shift operator above in the symbolic dynamic formulation to be described as a discrete Markov matrix. While markov transition matrices are only weakly mixing for non-pure or perfectly separable states, if there is strong mixing such as ν admits, then it implies the system is ergodic⁶⁸.

We can define a notion of Ergodicity for ConTop in terms of the difficulty of forging the cryptographic hashes of fibers/bundles

$$TODO : showboundsofFreedholmandCellComplex \quad (72)$$

We can use Markov Hilbert Diffusion⁶⁹ to define transition matrices for the Cell Complex formulation of ConTop. A general time-dependent sample state in Ω can be decomposed as

$$|\Omega^{(t)}\rangle = \mathbb{I} |\Omega^{(t)}\rangle = \sum_i^r |i\rangle \langle i | \Omega^{(t)} \rangle = \sum m^{(t)}(i) |i\rangle = \begin{pmatrix} m^{(t)}(1) \\ \dots \\ m^{(t)}(r) \end{pmatrix} \quad (73)$$

The Type Tower gives the diffusion map which can be expressed as

$$\Psi_t : \mapsto \Psi_t(x) \equiv \langle x | \Psi_t \rangle = \begin{pmatrix} \lambda_1^t \langle x | \Psi_1 \rangle \\ \dots \\ \lambda_{n-1}^t \langle x | \Psi_{n-1} \rangle \end{pmatrix} \quad (74)$$

and the diffusion distance

$$D_t^2(x, z) = \sum_{j=1}^{n-1} \lambda_j^{2t} (\Psi_j(x) - \Psi_j(z))^2 = \|\Psi_t(x) - \Psi_t(z)\|^2 \quad ndpmatrix \quad (75)$$

A Note on Information Gain and Coherence

By lemma 1, the set of entropy paths have a one-to-one correspondence with the set of stochastic processes: this is the focus of concurrent work MEME. Complexes of random variables and minimum free energy complex can be understood as providing a geometrically constrained architecture to deep neural networks, where the depth of the neural network corresponds to the dimension of the cochain complex and marginal variables and information I1 correspond

⁶⁷20, <https://webpace.clarkson.edu/~ebollt/Papers/stochas17.pdf>

⁶⁸Proposition 1.2 <http://www.weizmann.ac.il/math/sarigo/sites/math.sarigo/files/uploads/ergodicnotes.pdf>

⁶⁹<https://arxiv.org/ftp/cs/papers/0702/0702121.pdf>

to the input layer. Moreover, the energy functional interpretation of mutual information I_k and of total correlation G_k functions directly follow and generalize the definitions of the hierarchical deep architectures of Boltzmann machines and of Helmholtz machines [65,66] that explicitly expressed free energy in terms of Kullback-Leibler (KL) divergences between layers. Notably, the introduction of the multiplicity decomposition of “energy functions” formalizes unsupervised learning in neural networks in terms of a combinatorial family of analytically independent functions I_k with independent gradients (Theorem 4 in Reference [2]): instead of a single energy and associated gradient descent, mutual information provides a multiplicity of gradients. Then, the maximal depth of a deep neural network achieving the classification given the data is the dimension of the information simplicial complex—a result that can be linked to the work of Montúfar on the dimension of restricted Boltzmann machine [175]. In this cohomological context, the back-propagation is implemented by the information chain rule and is forward as imposed the cohomology contra-variant nature. The relation to information geometry and Amari’s natural gradient [176] follows from the relation of the Fisher information with the Hessian of the KL divergence [177] (or entropy [178]) and from the implementation of natural gradients for deep network training.

However, rather than using entropy, we could use the Type Tower to construct colored operads which can incorporate markov data to show the limit above in terms of latent variables. Formulation of the minimum energy complex in terms of colored (typed) operads is explored in MEME for the purposes of improving coherence via machine learning of these latent variables

Safety proofs with Generative Calculus

The enrichment on sheaves in ConTop gives a theory of quantales that is compatible with the temporal logic of concurrent hypergraphs; meaning that quantels can construct a coherence complex that is relative to each cell and can be used in logic proofs. The goal is to show that the deformation complex can be used within with eq 7.6⁷⁰ to reformulate the derivative in Definition 7.31 to formulate safety proofs that incorporate decoherence as a measure of latent variables. Consider the j -numeric derivative $\dot{x} : \mathcal{R}_\pi^\infty$ as the join of the directed family $\{y : \mathcal{R}_\pi^\infty | AD(y, x)\}$ whose cuts $\dot{x} = (\dot{\delta}, \dot{v})$ are given by eq 7.6. It will now be shown that the temporal logic of concurrent hypergraphs defines a compatible join for this derivative, implying that the coherence complex can be incorporated into safety calculation and the internal language of our topos as will be expressed in the following section.

First let’s show how the matrix multiplication of a quantale can synthetically construct matrix/vector space operations from sheaves and how those incorpo-

⁷⁰<https://arxiv.org/pdf/1710.10258.pdf>

rate into temporal logic. Given a symmetric monoidal preorder $\nu = (V, \leq, I, \oplus)$ that is symmetric monoidal closed, a unital commutative quantale is a symmetric monoidal closed preorder $\nu = (V, \leq, I, \oplus, -\circ)$ that has all joins; $\forall A \exists \forall A \subseteq V$ iff \times distributes across joins i.e the following⁷¹

$$(v \otimes \bigvee_{a \in A}) \cong \bigvee_{a \in A} (v \otimes a) \quad (76)$$

holds for all $v \in V$ and $A \subseteq V$. If the wedge product space that defines the Cell complex can be equivalently constructed by the join operator \vee then we know that the Cell complex is compatible with the derivatives of interval-valued functions and its coherence complex can be included in the calculation of the join operator. Let $(\dot{\delta}, \dot{v})$ denote the join of the directed family $\{y : \mathcal{R}_\pi | AD(y, x)$ and the cuts of the derivative \dots . By definition of the behavior contract for timed random walks for hypergraphs and the colimits of the poincare protocol, the wedge products of sheaves given by the supremum of all lower-bounds together with the infimum of all upper-bounds (taken in the π -modality) implies the following properties are satisfied for any $(d, u) : \mathcal{R}_{pre'}$

$$\dot{d} \iff \pi \exists (d' : \mathcal{R}_{pre'}^\infty). AD([d', +\infty], x) \wedge (d < d') \quad (77)$$

$$\dot{u} \iff \pi \exists (u' : \mathcal{R}_{pre'}^\infty). AD([-\infty, u'], x) \wedge (u' < u) \quad (78)$$

and approximate derivative AD is given by

$$AD(y, x) \iff \forall (r_1, r_2 : \mathcal{R}). r_1 < r_2 \implies y \sqsubseteq \frac{x^{\textcircled{a}}(r_2) - x^{\textcircled{a}}(r_1)}{r_2 - r_1} \quad (79)$$

then by proposition 4.3 are equivalent to the criteria for the join of a directed family.

We are now ready to determine a safety proof of the temporal logic of concurrent hypergraphs using the derivatives of local numeric types. Take $Cmnd := W_H$ as the sheaf of walks through the hypergraph H , $Cmnd$ is the π -sheafification of a quotient of $Cmnd_0 + (E \times Time)$ where $cmnd_0$ is considered as the constant sheaf on two elements. In particular there is a map of sheaves $Cmnd_0 \rightarrow Cmnd$. The Cells of L1 and L0 will as a delay that takes Fibers and returns an output that has verified convergence and correctness. The deformation of the coherence complex $a = |\prod_{\Gamma}^T|$ as a function of time is the factor considered and whos sheaf of coherence \mathcal{R}_π . Given the behavior contract for timed random walks for hypergraphs, take Γ to be the type context

$$\Gamma := Time, \quad T : Cmnd, \quad P : Cmnd, \quad a : \mathcal{R}_\pi \quad safe : \mathcal{Q} \quad rate : \mathcal{Q} \quad delay \mathcal{Q} \quad (80)$$

Proof of safety: Given the contracts Θ above, the Cell complex coherence $a : \mathcal{R}_\pi$ never decreases, i.e.

$$\Gamma | \Theta \vdash \forall (t : Time)(r_1, r_2 : \mathcal{R}. r_1 < r_2 \implies a^{\textcircled{a}}(r_1) \leq a^{\textcircled{a}}(r_2) \quad (81)$$

⁷¹eq 2.88 <https://math.mit.edu/~dspivak/teaching/sp18/7Sketches.pdf>

It follows that for any $t : Time$ and $r : \mathcal{R}$ we have the following

$$q < a^{\textcircled{a}}(r) \implies r < t \implies q < a \quad a^{\textcircled{a}}(r) < q \implies t < r \implies a < q \quad (82)$$

because deformation in the coherence complex is only possible in the case of a forgery \aleph within the time bounds.

Convergence proofs for ConTop

The preceding safety proof was used to determine the safety of ConTop in terms of the time to forge hashes \aleph . However, another proof of convergence in the face of network delays of sybil attacks can be introduced. Given a mapping $\rho_i : \Gamma_i \rightarrow \Gamma$ and image $\rho' : \Gamma' \rightarrow \Gamma$ convergence can be proved by adding an axiom to the contract to calculate deformations in the coherence complex caused by latent variables, the set of types in Γ but not in the image of ρ' . Conversely, types in the image of ρ' are called exposed variables. Lets define a new $\Theta = \theta_{safe}, \theta_{converge}, \theta_{inertial}$ for the contract, with $\theta_{converge}$ defined in terms of determinacy as follows

$$\theta_{converge} := \forall(t : Time)(x, x' : X)(r : \mathbb{R}). r > 0 \implies \quad (83)$$

$$(\mp_{[0,r]}(x = x')) \implies (ix = ix') \implies \mp_{[0,r+\epsilon]}(x = x') \quad (84)$$

where the exposed variables of step (n-1) + latent of (n) form the exposed of n. This allows for "generative effects" or rather hidden connections in the latent variables that improve the information gain of the coherence complex. If we consider these latent effects as external data entering the system, it can be shown that a model searching for decoherence in the coherence complex via entropic deformation, the more types that enter, the more latent variables, the better fit. This is the role of a reputation model mentioned in the Notes on Nonlinearity and in the limit it should produce little or no decoherence. Non-reputation based systems will have much worse decoherence.

$$\theta_{inertial} := \forall(t : Time)(P : X \rightarrow Prop)(r : \mathbb{R}). r > 0 \implies (\mp_{[0,r]}\exists(x : X).Px) \implies \quad (85)$$

$$\mp_{[0,r+\epsilon]}\exists(s' : S).[(\mp_{[0,r]}\exists(x : X).Px \wedge (px = s')) \wedge \forall(x : X).(\mp_{[0,r]}Px \wedge (px = s'))] \implies (px = s') \quad (86)$$

Finally, by SVS16⁷² when machines that are total (equivalent to the safety contract θ_{safe}), deterministic, and "inertial" are composed into systems by feeding output ports into input ports in arbitrary ways, the result is again total, deterministic, and inertial; this is criteria enough to show that different channel types in ConTop can commute to add structure to the coherence complex, but more importantly, it proves safety for all $\epsilon \in \mathcal{E}$.

⁷²3, <https://arxiv.org/pdf/1710.10258.pdf> footnote.22

Proof of convergence: given the contracts in Θ , the coherence complex functional vanishes with the addition of more Cells, it is equivalent to show that

$$\Gamma|\Theta \vdash \forall(t : Time) \downarrow (t > M \implies a \geq safe) \quad (87)$$

for all times $t > M$. Let $M = delay + \frac{safe}{rate}$ where delay is equivalent to $|\prod_{\Gamma}^T|$ so $M = N + delay$ since a is π -located, it is also $@_N$ -located, so since $a \rightarrow M$ as $rate \rightarrow \infty$ we have

$$@_N(safe < a \vee a < safe + a) \quad (88)$$

where as $a \rightarrow 0$ we now have

$$@_N(safe < a \vee a < safe) \quad (89)$$

which implies that $a \vee a \rightarrow 0$

Babel: A Language Syntax for Distributed Interpreters

The Generative Calculus can be used to define an interpreter for categorical semantics i.e. a programming language for declaration and verification of Consensus Protocols⁷³. Categorical Programming Language (CPL)⁷⁴ was constructed as a bridge between machine instruction and categorical datatypes (CDT). The temporal logic and modalities of the cellular decomposition can be shown compatible with Categorical Specification Language, (CSL), an intermediate construction that provides syntactic materials for CDT and CPL. Further by constructing a Free monad called Cell which can compute algebraically via recursion and that its internal language is compatible with CDT, and interpreter for the internal language can be constructed with CPL like syntax, which is described as a typed ml with left and right adjointness. One goal of this interpreter is to allow for type level correctness checking on systems that are already deployed, by maintaining Ω as a distributed context which holds a "type tower". For this interpreter a specification language, Babel, can be constructed. Another goal of this interpreter is to allow REPL like syntax and live interaction with external Cells. A full syntax implementation is left for future work, but compatibility of Ω with CSL sentences is shown below.

A CSL structure is a pair of a category and an interpretation $\langle C, \zeta \rangle$, where C is the free category of initial CSL structure. Given a CSL signature

$$\langle \Gamma, \Delta, \Psi \rangle \quad (90)$$

and a set Θ of CSL conditional equations, define the initial construction of a CSL category C whose objects are "ground" functorial expressions and morphisms are

⁷³danghica.blogspot.com/2019/05/how-to-make-programming-language-out-of.html

⁷⁴<http://web.sfc.keio.ac.jp/hagino/thesis.pdf>

are equivalence classes of functorial expressions $Exp(K, L) | K, L \in C$ (which defines equivalence $\equiv_{K,L}$) which are

$$Hom_C(K, L) \stackrel{def}{=} Exp(K, L) / \equiv_{K,L} \quad (91)$$

A interpretation ζ corresponding to the CSL signature is defined as the following components:

- Axiom A: for a functor symbol $F \in \Gamma_{v_1 \dots v_n}$, $\zeta F : C^{v_1 \dots v_n}$ is defined by

$$\zeta F(K_1 \dots K_n) \stackrel{def}{=} F[K_1 \dots K_n] \quad (92)$$

and

$$\zeta F(\langle e_1 \rangle \dots \langle e_n \rangle) \stackrel{def}{=} F[\langle e_1 \rangle \dots \langle e_n \rangle] \quad (93)$$

- Axiom B: for a natural transformation, $\alpha \in \Delta_{K,L}$, $\zeta \alpha$ is

$$\zeta \alpha_{K_1 \dots K_n} \stackrel{def}{=} \langle \alpha[K_1 \dots K_n] \rangle \quad (94)$$

- Axiom C: for a factorizer symbol $\phi \in \Psi_{\langle \langle K_1, L_1 \rangle \dots \langle k_n, l_n \rangle \rangle}$, $\zeta \phi$ is

$$\zeta \phi_{K'_1 \dots K'_n}(\langle e_1 \rangle \dots \langle e_n \rangle) \stackrel{def}{=} \langle \psi[K'_1 \dots K'_n](e_1 \dots e_n) \rangle \quad (95)$$

For any CSL structure satisfying Θ there is a unique morphism from $\langle C, \zeta \rangle$ ⁷⁵ which implies that it is the initial object in the full sub-category of $CMod(\langle \Gamma, \Delta, \Psi \rangle)$ of all the structures satisfying Θ . The following Type Tree can be used to convert temporal logic into ground closed functorial expressions.

For the triple $\Omega SL := \langle \Gamma, \Delta, \Psi \rangle$ given by the associated variables above and with $\Psi(\Lambda = CFE(\Gamma)) : (\Lambda \times \Lambda) \times (\lambda \times \Lambda)$ and $CSE(\Gamma)$ are closed functorial expressions over Γ , the triple satisfies the definition of CSL signature⁷⁶ by definition of Θ and by Ψ which is the indexed set of factorizers of the cell complex.

Definition Type Tree: let,

$$\zeta(\nu) := \bigoplus_{i=0 \dots i \in T} \bigotimes_{j=0 \dots j \in \Gamma} Cell(\omega, \epsilon^i) \quad (96)$$

which is an equivalent cellular construction of the directional derivative functional of Generative calculus (eq 18). By this equivalence, Axiom A is satisfied by the direct sum definition of n'th iterated partial derivative (18), Axiom B is equivalent to the definition of ConTops presheaf and Axiom C follows from the

⁷⁵thm 2.6.9 <http://web.sfc.keio.ac.jp/hagino/thesis.pdf>

⁷⁶2.2.1 <http://web.sfc.keio.ac.jp/hagino/thesis.pdf>

chain homotopy equivalence relating the n th higher directional derivative and the n th iterated partial directional derivative (eq 19)

Definition Cellular CSL Signature: let

$$\langle Cell(\omega, -), \zeta \rangle \quad (97)$$

where $Cell(\Omega, -)$ has the Frobenius structure of eq 34 and ζ is given by the definition of the Type tree. As the morphism for $Hom_C(K, L)$ is clearly satisfied by the exact left adjointness of the protocol manifold, it suffices to show that the Free monad $Cell$ of the coherence complex satisfies the requirements closed ground functorial expressions. Consider that by the definition of ζ_1 (eq 40), Θ carried by the lax braided monoidal functor this satisfies the definition of j -closed proposition⁷⁷. Any j -closed proposition can be rewritten separate of j variables, which for $Cell$ are given by the quotient of the equivalence relation that is the Protocol Topology's homotopy equivalence relation and also the definition of dependent type⁷⁸. Thus $Cell(\Omega, -)$ is free along the j -closed propositions of Ω , which satisfies the "ground" requirements up to homotopy and along the enrichment ν .

The interpreter ζ differs from local interpreters in that the global context is dynamic and defined in terms of the locally and globally observed behavior data. Thus it can be seen as a distributed interpreter for micro services. Unlike ordinary programming languages, which can't process the complex numbers directly⁷⁹, Cells have homotopy defined by the protocol complex which allows for bijective correspondence of the internal temporal language and the coherence complex.

Generative Economics

The focus of the remaining work is a reformulation of general equilibrium theory in economics constructed within the generative calculus. Ellerman⁸⁰ reformulated the mathematical theory of arbitrage in terms of physical systems and natural law. As will be shown, his construction of arbitrage free market prices can be reached from the dimensions defined in the contract $\Theta : ConTop$ and extended

⁷⁷definition 4.8, <https://arxiv.org/pdf/1710.10258.pdf>

⁷⁸

⁷⁹<https://betterexplained.com/articles/an-interactive-guide-to-the-fourier-transform/>

⁸⁰<https://ellerman.org/wp-content/uploads/2012/12/SIAM-Arbitrage-reprint.pdf>

The Economic Engine

Ellerman's paper breaks down a general theory of arbitrage from the lens of the type of calculus (technically differential geometry) which is used in the formulation of physical systems, the best example imho being the explanation of a "position" as a path across order books which is essentially kirkov's law. For a little tl;dr on arbitrage, as a quantity, it's assumed to be nonexistent (conserved) if exchange rates are dependent only on a price system. However in the real world, issues with centralized exchanges usually encapsulate some process of arbitrage, due to the disconnection between orderbooks (and whatever exchanges are doing themselves behind the scenes). Arbitrage described in terms of Kirkov's law has a fundamental assumption of being "path conserved" along any loop/cycle in a graph of transitions. Ellerman then describes a "derived boot system" in terms of the classical theories of flows on graphs (where by "boot" it means to swap one commodity for another based on a vector of exchange rates associated to each commodity) and extends via the fact that circulations (like kirkov) and boot systems form orthogonal subspaces to show the same for prices and exchanges. So essentially a price system and an exchange are orthogonal to each other, meaning they form a dual (like in that formula I derived above) however where the exchange is in terms of some external currency vs the price system. The takeaway is that there is an equivalence between the magnitude of the of the "cofactor vector" (essentially the diag of the dual which is a covariance matrix) is equal to zero means that arbitrage does not occur.

Well what's really cool is that we can actually allow for arbitrage across commodities that allow for arbitrage to occur across each commodity's "boot vector" yet still preserving the requirement of value to be conserved across the system globally. The magic lies in how the formulation of our space is a "braided category" which means that there is a "handedness" to the order of events. Essentially, if one creates an Emission from an address/account with channel token A into B, that occurs as a deformation of token A's boot vector into token B's. The deformation (cofactors changes/modified) occurs according to the order given by the braiding between A and B. That braiding can be thought of as a "loop space" or like a vortex within a directed graph and according to the laws about conservation, the total gain from a loop around the loop space must be conserved, but within the loop space itself it does not need to be. That is to say, that there is a "locally relative" arbitrage that preserves the total magnitude of the loop space between A and B, but increases an address's value is valid. We can show this in like one line (I think it's actually an extension of how Stephen Smale came up with market equilibria) which is that the solutions to the dual space form a "spectra" and that the solutions of the spectra in our model which allow for locally relative arbitrage still have the same solutions or "stable points". So the idea here is that we should be able to now take these lagrange multipliers (using the ratio for the diff eq (4 i believe) in my proof) we can derive matrix equations for the price system. From those we can look at the

stability of channel tokens depending on an influx of transactions or emissions.

Although we cannot have Dirichlet forms be the morphisms of a category themselves, we have a standard trick for turning data into the morphisms of a category: we decorate cospans with them

Inspired by the principle of least action of classical mechanics in analogy with the principle of minimum power, we develop a setting for describing behaviours that allows for easy discussion of composite behaviours: Lagrangian sub-spaces of symplectic vector spaces. The decorated corelations that describe lagrangian relations have the same signature as GraphCospan. Thus we can describe the simplecification of $ConTop \rightarrow GraphCospan$ as Lagrangian relations as follows:

$$Lagr : (Cospan(Finset), +) \rightarrow (Set, \times) \quad (98)$$

where $Lagr$ maps a finite set X to the set $Lagr(X)$ of Lagrangian subspaces of the symplectic vector space $\mathcal{F}^X \oplus \mathcal{F}^X$. For morphisms, given a cospan of finite sets $X \rightarrow Y$ we take its jointly-epic part e , and thus obtain a map $Se : \mathcal{F}^X \oplus (\mathcal{F}^X)^* \rightarrow \mathcal{F}^Y \oplus \mathcal{F}^Y$. As Lagrangian relations map Lagrangian subspaces to Lagrangian subspaces (Proposition 6.40), this gives a map

$$Lagr(f) : Lagr(X) \rightarrow Lagr(Y) \quad (99)$$

$$L : (N, E, s, t, r) \mapsto Se(L) : (M, E, f \circ f, f \circ t, r) \quad (100)$$

Moreover, equipping this functor with the family of maps

$$\lambda_{N,M} : Lagr(N) \times Lagr(M) \rightarrow Lagr(N + M) \quad (101)$$

$$(L_N, L_M) : ((N, E, s, t, r), (M, F, s', t', r')) \mapsto L_N \oplus L_M : (N + M, E + F, s + s', t + t', [r, r']) \quad (102)$$

unit

$$\lambda_1 : 1 \rightarrow Lagr() \quad (103)$$

$$\mapsto \{\} \quad (104)$$

is a lax symmetric monoidal functor and (N, E, s, t, r) are the components of the $(0, \infty)$ -graph of GraphCospan.

The coherence complex is compatible with the category of linear relations, which is how Ohm's law can be reformulated, trivially by definition of the protocol manifold and the Frobenius (braided) algebra generating GraphCospan. Define the natural transformation

$$Res : (Graph : GraphCospan) \Longrightarrow (Linsub : GraphCospan) \quad (105)$$

mapping each $(0, \infty)$ -graph on N , which describes a network of resistors, to the linear subspace of $\mathbb{R}^N \oplus (\mathbb{R}^N)^*$ of electrical states permitted by Ohm's law. Let $\phi \in \mathbb{R}^N$ define the power

$$Q(\phi) = \sum_{e \in E} \frac{1}{r(e)} (\phi(t(e)) - \phi(s(e)))^2 \quad (106)$$

n(note this is equivalent to the extended power functional). Then the states of a network of resistors are given by a potential ϕ on the nodes and the gradient of the power at this potential

$$Res_N : Graph(N) \rightarrow LinSub(N) \quad (107)$$

$$(N, E, s, t, r) \mapsto \{(\phi, \nabla Q_\phi) | \phi \in \mathbb{R}^N\} \quad (108)$$

This defines a monoidal natural transformation. Hence, by Theorem 4.1, we obtain a hypergraph functor $GraphCospan \rightarrow LinSubCospan$.

The semantics provided by this functor match the standard interpretation of networks of linear resistors. The maps of the Frobenius monoid take on the interpretation of perfectly conductive wires, forcing the potentials at all nodes they connect to be equal, and the sum of incoming currents to equal the sum of outgoing currents—precisely the behaviour implied by Kirchhoff’s laws. More generally, let $(X \xrightarrow{i} N \xleftarrow{o} Y, (N, E, s, t, r))$ be a morphism of $GraphCospan$, with Q the power function corresponding to the graph $\Gamma = (N, E, s, t, r)$. The image of this decorated cospan in $LinSubCospan$ is the decorated cospan $(X \xrightarrow{i} N \xleftarrow{o} Y, \{(\phi, \nabla Q_\phi) | \phi \in \mathbb{R}^N\})$ and it follows that the subspace

$$LinSub[i, o](Res_N * \Gamma) \subseteq \mathbb{R}^{X+Y} \oplus (\mathbb{R}^{X+Y})^* \quad (109)$$

is the subspace of electrical states on the terminals $X+Y$ such that currents and potentials can be chosen across the network of resistors (N, E, s, t, r) that obey Ohm’s and, on its interior, Kirchhoff’s laws. In particular, after passing to a subspace of the terminals in this way, composition in $LinSubCospan$ corresponds to enforcing Kirchhoff’s laws on the shared terminals of the two networks⁸¹. The potential ϕ is a realizable potential for a given circuit if and only if the induced current

$$I(e) = \frac{1}{Z(e)}(\phi(t(e)) - \phi(s(e))) \quad (110)$$

where Z is the impedance of the component. If so, it obeys Kirchhoff’s current law:

$$\sum_{s(e)=n} I(e) = \sum_{t(e)=n} I(e) \quad (111)$$

for all $n \in N \setminus \partial N$.

By defining a Dirichlet form in terms of behavior contracts Θ , we can now define the theory of arbitrage for Generative Calculus. An ‘external behaviour’, or behaviour for short, is an equivalence class of circuits, where two are considered equivalent when the boundary current is the same function of the boundary potential. Dirichlet forms $Q : \mathbb{R}^S \rightarrow \mathbb{R}$ where S is a finite set are important because they have the properties of potential difference outlined by Ellerman,

⁸¹<https://arxiv.org/pdf/1504.05625.pdf>

but also because they obey the Markov Property⁸² which will be made use of in defining discrete operators obeying the steady states of the coherence complex. Consider the black box functor, a well defined hypergraph functor in the category of circuits

$$\blacksquare : \text{Circ} \rightarrow \text{DirichCospan} \rightarrow \text{LagrCospan} \rightarrow \text{LagrCorel} \rightarrow \text{LagRel} \quad (112)$$

The equivalence of \blacksquare and Cell as follows, will demonstrate the properties of the DirichCospan .

First lets redefine Cell in terms of Circ . Consider that hile cospans in some category \mathcal{C} with finite colimits are adequate for describing the interconnection of open systems, their composition often retains more information than can be observed from the boundary. As was shown for the case of linear relations (which Cell inherits from), corelations with respect to an epi-mono factorisation system instead provide the right notion of black boxed open system. An open system or, equivalently, a system with boundary, is described by a variant of the colimit, which Cong defines as the bound colimit⁸³ Define Cell as the

$$\text{Cell} : \text{Circ} \rightarrow \text{DirichCospan} \rightarrow \text{LagrCospan} \rightarrow \text{LagrCorel} \rightarrow \text{LagRel} \quad (113)$$

with bound colimit $B \rightarrow T$ defined by the apex of the cocone that is initial out of all cocones over the boundary diagram that extend to a cocone over the open system diagram $s : B \rightarrow T$. As LinRel , Cell has an epi-split mono factorisation system, meaning the equivalence classes of open systems can be indexed by epis $e : B \rightarrow T$ where the epi e is the minimal representation, or the black boxed system. So the bound colimit for a closed system is the minimal representation of one type $\epsilon \rightarrow \nu$ and $\text{Cell}(\epsilon, \otimes)$ is given by the image of system homset $\text{hom}(T, V)$ in the boundary homset $\text{hom}(B, V)$. The ‘minimal representation’ is initial in the cocones over B that extend to cocones over $s : B \rightarrow T$ epi-split mono factorisations $= e; m$, with some retraction m' , then for two non-unique cocones there exists a unique map which commutes

$$\begin{array}{ccc} M & \xrightarrow{m;x} & N \\ & \swarrow e \quad \searrow c & \\ & B\zeta & \end{array}$$

Define the minimal representation of Cell is the diagram for (now open) system $\Omega_\Gamma^T \setminus \Omega_0^0$, where open is still bounded by the enrichment ν and defined in terms of ConTop as

$$? \quad (114)$$

Define the open bound colimit as: where rather than just an arrow $B \rightarrow T$, we instead want the apex of the cocone that is initial out of all cocones over

⁸²6.14 <https://math.ucr.edu/home/baez/thesisfong.pdf>

⁸³7.1 <https://math.ucr.edu/home/baez/thesis>

the boundary diagram that extend to a cocone over the system diagram

$$\begin{array}{ccccc}
 & & \Omega_{T,\Gamma>0} & & \\
 & \swarrow \gamma \otimes 1 & & \searrow \alpha & \\
 \Gamma & \xrightarrow{\quad} & \Theta & & \\
 \uparrow \otimes : \vee & & \downarrow \otimes : \wedge & & \\
 M & \xrightarrow{m;x} & N & & \\
 & \nwarrow e & \nearrow c & & \\
 & & Cell^i & &
 \end{array}$$

where the system diagram is the lower triangle given by $Cell(\Omega, \otimes)$.

Consider an associator $\alpha(\lambda, p)$ and the fact that $\Gamma_{X,Y} : x \otimes y \rightarrow y \otimes x$ for the coherence criteria of ConTop, there is N n -fold action for the following variables: let $\alpha = \text{colim}(L_0)$ or the convergence of $L_0 \rightarrow \Omega$ Fibers.

let $\alpha^{-1} = \zeta(\nu)$ be the coherence complex functional.

let $\lambda = \text{colim}(L_1)$ or the convergence of $L_1 \rightarrow \Omega$ Fibers.

let $\lambda^{-1} = \bigvee_{\nu}$ be translation matrix given by the join over quantales of the terminal object of channels in Ω .

let $p = \text{colim}(Fibers_{\epsilon})$ the convergence of all fibers' to a valid parent child state.

let $p^{-1} = (Fibers_{\epsilon})$ the matrix of collateral swaps between Fibers.

For $A, B, C \in \Omega$, constrain $\Omega := \alpha(\lambda, p)$. The relationship between θ and Γ is given by the type tree and will be used below to form the following octahedral identity, which demonstrates the dirichlet bounds for the story problem and associated Γ for ConTop. Consider the Convergence Props above extended for a sequence of morphisms in $K(A)^{84}$ of which ConTop is equivalent to via Cell Homology functor of the Protocol Topology. The n th translation (or shift) is the complex $A[n]^i = A^{i+n}$ with differential $d^i : A^{i+1} \oplus B^i \rightarrow A^{i+2} \oplus B^{i+1}$ and translation morphism $f[n] : A[n]^{\bullet} \rightarrow B[n]^{\bullet}$ defined by $f[n]^i := f^{i+n}$. The cone of a complex f denoted $f^{\bullet}f$ is defined as $cone^i f = A^{i+1} \oplus B^i$ with differential $d^i : A^{i+1} \oplus B^i \rightarrow A^{i+2} \oplus B^{i+1}$ given by $\begin{pmatrix} -d_A^{i+1} & 0 \\ f^{i+1} & d_B^i \end{pmatrix}$ Then given a commutative

⁸⁴<https://www.math.lsu.edu/~pramod/tc/07s-7280/notes4.pdf>

diagram of morphisms


$$\begin{array}{ccc} & B^\bullet & \\ f \nearrow & & \searrow g \\ A^\bullet & \xrightarrow{h=g \circ f} & C^\bullet \end{array}$$

extend each of f, g, h to a distinguished triangle.

α has square completion via the following diagram:

$$\begin{array}{ccccccc} E \wedge E & \longrightarrow & H/\nu & \longrightarrow & H' & \longrightarrow & H[1]^\bullet \\ \downarrow r=V \times V & & \downarrow & & \downarrow & & \downarrow r=E' \\ V & \longrightarrow & E & \longrightarrow & Cell : \{*\} & \longrightarrow & Cell[0]^\bullet \end{array}$$

By definition of the boundary cone of an open system, if ABC are replaced with $\Omega\Gamma\Theta$ there exists a distinguished triangle making the following octahedron commute (Note: reformat octahedron below and use proper arrows for distinguished vs commutative triangles)



The preceding diagram connects the Frobenius structure to differential relations carried by the poincare protocol (of L_0, L_1) which will be used to determine steady state stability and the path integral formulation of open system. The final step is to define a dual space to the coherence complex \prod_{Γ}^T for mapping the functional to the euclidian space. Each hypergraph category with a so-called dagger functor an involutive contravariant endo functor that is the identity on objects—such that the category is a dagger compact category. This dagger category corresponds to the complex conjugate of the hilbert space dual which is just its adjoint in the usual sense. Define $\tau \cong \zeta^{-1}$ (or zeta with arrows reversed) as the conjugate transpose map from dagger category ζ^{-1} , dual to ζ^{85} . Then we have:

$$\int \langle \zeta | \tau \rangle = \aleph_{\zeta, \tau} \quad (115)$$

where $\aleph_{\zeta, \tau}$ is the torsor or "constant" geometric relationships to a total volume. As is clear, all deformations are described in terms of $\aleph_{\zeta, \tau}$. Kirkov's current law

⁸⁵<https://www.mta.ca/~rosebru/FMCS2018/Slides/Selinger.pdf>

is specified categorically as⁸⁶

$$d^\dagger d\phi = i\chi|_\chi = rJ \quad (116)$$

where the laplacian \mathcal{L} is given by

$$d^\dagger d : C^0(\Gamma) \rightarrow C^0(\Gamma) \quad (117)$$

is a version of Laplace's equation with boundary conditions. It says the Laplacian of the potential $\phi \in C^0(\Gamma)$ equals zero except on the boundary of Γ , where it equals χ . This is solved like an ordinary differential form: since this function is smooth, we must have $P'(0) = 0$, $P(t) = \langle d\phi, d\phi \rangle + 2t\langle d\phi, d\alpha \rangle + t^2\langle d\alpha, d\alpha \rangle$ thus

$$P(t) = \langle d\phi, d\phi \rangle + t^2\langle d\alpha, d\alpha \rangle \quad (118)$$

The potential ϕ that minimizes the power for a fixed value of $\psi = p\phi$ is a discrete version of the Dirichlet problem. In the case of the coherence-translation complex, $\langle \zeta|\tau \rangle : C^0(\Gamma) \rightarrow C^0(\Gamma)$ the solution to the dirichlet problem is as follows: Consider for any $\phi \in C^0(\partial\Gamma)$

$$Q(\psi) = \frac{1}{2} \inf_{\phi: p\phi=\psi} \langle d\phi, d\phi \rangle \quad (119)$$

where $\langle d\phi, d\phi \rangle$ defines a nonnegative quadratic form on the finite-dimensional vector space $C^0(\Gamma)$ and the constraint $\phi = \psi$ picks out a linear subspace of this subspace. Its derivative defines an element of the dual space $C_0(\partial\Gamma)$ denoted by dQ_τ this element is equal to the boundary current J corresponding to the boundary voltage τ such that $dQ_\tau = J$. Given a linear operator $f : C^0(\partial\Gamma) \rightarrow C^0(\Gamma)$, define the Fiber-current $I_F = \lambda^{-1}p = \alpha^{-1}$ and boundary current $J_\alpha = \lambda\alpha(\lambda, p) = \lambda^2/$, for any $\tau' \in C^0(\partial\Gamma)$ the power can be formulated in terms of a dirichlet form as follows

$$Q(\tau) = \sum_{i,j} c_{i,j}(\tau_i - \tau_j)^2 \quad (120)$$

Thus equivalence of $Cell \cong \blacksquare$ in terms of the solution its Dirichlet problem.

Utility Theory of Arbitrage Free Networks

By the Topological Second Law of Thermodynamics and Entropy Rate and χ_T can only increase or stay constant with t . Thus we can calculate the Utility of $\Omega \in ConTop$ using the efficiency of real heat engines. Consider the carnot engine, which can be hooked in series and the composite efficiency debit is the product of individual debits. Between two information reservoirs, all carnot engines have the same efficiency and thus the same efficiency debit, otherwise

⁸⁶proposition 3.2 <https://ncatlab.org/johnbaez/show/Circuit+theory>

it would be possible to create a "heat arbitrage" creating a "perpetual motion machine of the second kind" The composite efficiency debits between any two reservoirs implies path independence. Thus by Ellerman's arbitrage theorem, the second law implies that there exists $m + 1$ positive real "prices" $T_0 \dots T_m$ such that for any carnot engine operating between nodes h and c, the efficiency debit is $r = \frac{T_c}{T_h}$. If the "prices" are normalized so that the freezing and boiling points of water differ by 100 units, then the "prices" are the Kelvin Absolute Temperatures of the reservoirs.

Thus we can describe the efficiency of ConTop or its component protocols as

$$e = 1 - \left(\frac{dQ_c}{dQ_h} \right) \quad (121)$$

and the efficiency debit as $r = 1 - e = \left(\frac{dQ_c}{dQ_h} \right)$. It follows from the definition of the extended power functional for the ConTop that the efficiency (MWe⁸⁷) for output $o \cong c$ and input $i \cong h$ is given by

$$e = \frac{dQ_o}{dQ_i} \quad (122)$$

In order to understand efficiency of Cell complex, we need to extend the definition of utility for circuits into an information theoretic complex, namely the Minimum free energy complex. The total free energy is a Kullback-Leibler divergence and a special case (symmetric in the interacting body) of the free energy introduced by Baez and Pollard⁸⁸. A general information structure is defined by the triple (Ω, \coprod, P) above which can be used to form a simplicial information cohomology complex which can be triangulated like space-time representations such as causal sets; this was actually alluded to via Blockchain Cohomology as the equivalence of Ω with Sorkin's Fintoposets. For our minimum free energy complex (Ω, \coprod, P) , the finite information rate r of an information path is

$$r = \lim \frac{H_k}{k} \quad (123)$$

(the evolution of entropy H_k when the number of variables k increases). By noting the equivalence of the io black box functor and the category of circuits which carries the extended power functional

$$e = \frac{dQ_o}{dQ_i} = \frac{\Omega - \Omega_0}{\Omega_0} \xrightarrow{\lim \Omega \gg \Omega_0} \frac{\Omega}{\Omega_0} - 1 \quad (124)$$

and can be seen as an increase in the latent variables contained in the coboundary H_k (ways in which they can mix or nonlinear effects) as the number of variables in the base layer $\Omega_0 = k$ increases. It follows that as more consuming channels in ConTop eclipse producing, that is as the coboundary that is the

⁸⁷<https://energyeducation.ca/encyclopedia/Megawattselectric>

⁸⁸Baez, J.; Pollard, S. Relative Entropy in Biological Systems. Entropy

bounded colimit of an open system grows relative to Ω_0 , the overall efficiency increases. This is an artifact of the fact that as more producers become consumers of other producers, there is an increase in cross information and thus Kulbak-Leibler (KL) divergence increases.

Equilibria Analysis

Now we can define the pareto optima for ConTop. We can extend the definition of boot vector of Ellerman's boot system via the triangulated category and in terms of spiders along the enrichment. This will give a 1:1 formulation of the matrix calculus for the lagrangian multipliers in terms of signal flow graphs.

Utility maximization implies that the marked must be arbitrage free, which is described as

$$\frac{MU_1}{p_1} = \frac{MU_2}{p_2} \dots = \frac{MU_n}{p_n} \quad (125)$$

"Markets" or market graphs can be defined in terms of the marginal data $F(\hat{x})$ and $\nabla f^0(\hat{x})$. If (\hat{x}) is feasible, regular and a local maximum, then any market graph defined from marginal data $\nabla f^0(\hat{x})$ and $-F(\hat{x})$ must be arbitrage-free. There is a vector $P = (1, p_1 \dots p_m)$ of normalized cofactors which is a price vector for any such market graph and the normalized cofactors $p_1 \dots p_m$ are the lagrange multipliers associated with the m constraints. The market is only arbitrage-free if and only if the n transformation rates $\frac{f_i}{g_i} \dots \frac{f_n}{g_n} = \mu$ where the common rate of transformation is the Lagrange multiplier μ . Let the matrix A $\begin{pmatrix} f_1 & \dots & f_n \\ g_1 & \dots & g_n \end{pmatrix}$ where -g i is used instead of + g, since $g(x_1 \dots x_n)$ represents the amount of the resource used-up. Consider any column of this market matrix coupled with the dummy column to form a square matrix: $\begin{pmatrix} ? & f_i \\ ? & -g_i \end{pmatrix}$ The cofactors of the dummy column are the local prices $P_y = -g_i$ and $P_b = -f_i$ so (assuming $g_i \neq 0$) the price of b in terms of the numeraire y is the transformation rate

$$b \xrightarrow{P_b/P_y = f_i/g_i} y \quad (126)$$

defined by the marginal variations in the instrument x_i . Consider the matrix of partials of the constraints evaluated at the candidate point x^0 , G: $\begin{pmatrix} g_1^1 & \dots & g_n^1 \\ \dots & \dots & \dots \\ g_1^m & \dots & g_n^m \end{pmatrix}$

For the intuitive market to be arbitrage-free, all the local cofactor prices $(P; , Pb, , Pb2)$ defined by any set of $m \geq 2$ instruments must be scalar multiples of the non-zero price vector $(P, , Pb, , PbJ$. In formal terms, the market matrix defined by the problem is $\begin{pmatrix} \nabla f \\ -G \end{pmatrix}$ The candidate point x^0 , satisfies the constraints and is regular in the sense that the $M \times m$ matrix $G[g_i^j]$ is of full low rank. It follows that there are m columns forming a non-singular submatrix G^* . If f^* is th

evector for the corresponding m partials of f then consider the $(m+1) \times (m+1)$ matrix: $\begin{pmatrix} ? & f^* \\ ? & -G^* \end{pmatrix}$ where the cofactors of the dummy column form the local cofactor prices $P_y, P_{b_1} \dots P_{b_m}$ determined by the m chosen instruments. The intuitive market is arbitrage-free if all the $C(m, n)$ vectors of local cofactor prices are scalar multiples of this non-zero vector. In formal terms, the first order necessary condition for the candidate point x_0 to be a constrained maximum is equivalent to the condition that the market matrix of the problem $A = \begin{pmatrix} \nabla f \\ -G \end{pmatrix}$ is arbitrage-free which, stated in the Arbitrage in turn, is equivalent to the other conditions Theorem for Market Matrices.

Consider the equivalent market matrix formed from $\text{ConTop} \begin{pmatrix} \Pi_{\Gamma}^T \\ -H \end{pmatrix}$ and note the signature of its matrix as the copy generator⁸⁹

$$\theta \left(\begin{array}{c} \text{---} m \end{array} \right) = \begin{pmatrix} I_m \\ I_m \end{pmatrix}$$

$\theta \mapsto \begin{pmatrix} 1 \\ 1 \end{pmatrix} : 1 \rightarrow 2$ which clearly maps to the spider diagram of the open bound colimit. The $\text{GraphCospan } H$ admits decomposition into a flattened matrix of partials by the definition of the lagrangian. These partials define the steady state equilibria of a Price Index across all ϵ sheaf types carried by the Cell complex.

As a final step, let's re-formulate the calculation of Efficiency above in terms of the in and out degree of each Cell. By definition of the Cell Lagrangian, it forms a linear subspace which implies the existence of linear relations⁹⁰. Thus, we can construct a linear relation out of the Dagger category as it is always the weak inverse of R . and enforce that for any Cell diagram we have

$$d * d^\dagger * d = d \quad (127)$$

which means that the volume of d does not fluxuate, or is a normalized linear relation. By symmetry, this dagger category is given by the m -discard generator, which is the m zero generators direct summed together yielding the following

⁸⁹<https://graphicallinearalgebra.net/2015/06/09/matrices-diagrammatically/>

⁹⁰<https://graphicallinearalgebra.net/2015/12/26/27-linear-relations/>

linear relation $\theta \mapsto \begin{pmatrix} I_m \times I_m & I_m \times I_m \\ I_m \times I_m & I_m \times I_m \end{pmatrix}$ and a generator of Rel as the dimensions of the matrix $m \times n$ is given by the open coboundary of open systems. By the "special" equation⁹¹ implies that $2 = 1$ which is true in the case of when composing relations, which keeps track of paths (just as the natural number matrices), it's just that we are only interested in the Yes or No question "Is there a path?", and we don't care about the number. This is one interpretation of (S): it ensures that having 100 paths is the same as having 1 path (but different to no paths).

By using this fact of Rel, we can redefine utility in terms of the dagger-hypergraph category and wiring functions of the dot-diagram of GraphCospans⁹²

$$e = \frac{dQ_o}{dQ_i} \lim_{\Omega \gg \Omega_0} \frac{\Omega}{\Omega_0} - 1 \implies \frac{\Omega}{\Omega_0} \in \{0 \dots 2\} \quad (128)$$

$$r = 1 + e = \frac{dQ_o - dQ_i}{dQ_i} = \frac{|A - G|}{A} \quad (129)$$

which equals 0 if optimal. Note this is an equivalent definition of the coherence complex but incorporating state metadata into the creation of H. The solution spectra to s Cell is given by the variance bounding of the Cheeger bounds⁹³, which are given by the co/homological dimensions of the a given Cell sub-complex in the total complex ConTop.

Pareto Optima

We can now define Pareto optima for ConTop and the coherence complex. Consider a Pareto Allocation as Pareto optimal or Pareto efficient⁹⁴, if it is not possible to reallocate the resources of the economy in a way such that possible to reallocate the resources of the economy in a way such that at least one person is better off without making any other person worse off. In a competitive economy, all firms maximize profits, individuals maximize their utility and markets clear. A competitive economy's market equilibrium is defined by the pareto optimal steady states of its utility curves. Naturally as stated in the foreward, a competitive economy is the goal of generative economics, thus we can show the success of our construction ConTop and concretely define the steady state solutions of a pareto optimizing consensus protocol.

Consider the 'attainable states' W as a subset of a 'commodity space' P^m , an open set in the Cartesian space R^l . Define

$$W = \{x \in P^m \mid \sum x_i = w\} \quad (130)$$

⁹¹<https://graphicallinearalgebra.net/2015/09/08/21-functions-and-relations-diagrammatically/>

⁹²<https://arxiv.org/pdf/1406.5942.pdf>

⁹³<https://www.maths.lancs.ac.uk/~sherloc/ResearchTutorials/L2var.pdf>

⁹⁴<https://are.berkeley.edu/traeger/Lectures/ClimateChangeEconomics/Slides/>

an open subset of an affine subspace with compact closure in $(R^l)^m$. Each consumer is supposed to have his preferences represented by a function $u_i : P \rightarrow R$, his utility function which we suppose as differentiable as necessary. Thus consumer i prefers x'_i to x_i if and only if $u_i(x'_i) > u_i(x_i)$. Consumer i is indifferent to commodity bundles in the same level surface of u_i . Hence the $u_i^{-1}(c)$ are called indifference surfaces. let $\pi_i : P^m \rightarrow P$ be the projection $\pi_i(x) = x_i$ then we have induced functions on W , still denoted by u_i , defined as the composition

$$W \xrightarrow{\text{inclusion}} P^m \rightarrow P \xrightarrow{u_i} R \quad (131)$$

One considers exchanges in W , which will increase the utility of each consumer or increase each u_i on W . A state $x \in W$ is called Pareto optimal if it has the property; there is no $x' \in W$ with $u_i(x') \geq u_i(x)$, all i , and $u_j(x') > u_j(x)$, some j . The idea is that if $x \in W$ is not Pareto, then it is not economically stable.

In the abstract setting of Smale's Pareto theory⁹⁵ the idea of the following 'Hessian'⁹⁶ is to obtain a criterion for a point $x \in W$ to be a stable Pareto point. The Hessian H_x for utility $u : W \rightarrow R^m$ at $x \in \theta$, where u is C^r and x satisfies the rank condition, is negative definite. If u satisfies the "transversality condition" (given by the Fredholm operators of $+$ and $-$ ⁹⁷) and has no cycles, gradient vector field for u is a smooth tangent vector field X defined over W with the property that $X(x) \in H(x)$ for $x \notin \theta$ and $X(x) = 0$ for $x \in \theta$ which corresponds to Morse relations given by

$$M_i = \sum_{\lambda} \dim H_{i-\lambda}(\theta_{\lambda}, \theta'_{\lambda}) \quad (132)$$

where θ_{λ} is the set of $x \in \theta$ with index λ and nullity zero and θ_n the set of $x \in \theta$ with nullity positive. The coefficients of M_i are given by an arbitrary field and specializes to $m = 2$

$$M_m = \dim H_1(\theta_{n-1}, \theta'_{n-1}) \quad (133)$$

however m can be extended beyond two to create an m -dimensional ETF or collateralized swap, which will be shown below.

A dynamical system is a gradient system on X , $\dot{x} = f(x)$ if there is some function $V : X \rightarrow R$ such that $f(x) \equiv -DV(x)$. The function $V(x)$ is often referred to as the potential function of the system; $f(x)$ is called the gradient of V at x . The directional derivative of $V(x)$ in the direction $h = (h_1 \dots h_n)$, $\|h\| = 1$, is defined to be $DV(x)h$. The directional derivative measures how fast the function V is increasing in the direction h ; as the above formula indicates, it is just the projection of $DV(x)$ on the vector h . It is therefore clear that this projection will be maximized when $DV(x)$ itself points in the direction h .

⁹⁵<https://sci-hub.se/https://www.sciencedirect.com/science/article/abs/pii/S0304406874900020>

⁹⁶<https://sci-hub.se/https://link.springer.com/article/10.1007/BF00485983>

⁹⁷Corollary B.14, Generic Morse-Smale property for the parabolic equation on the circle

Thus we have a nice geometrical interpretation of the gradient: it points in the direction where V increases most rapidly.

The primary feature of Hamiltonian systems (of which the above hessian is an example) for economic applications is that they have certain desirable stability properties. In the classical theory of Hamiltonian mechanics, H was quadratic so that the Hamiltonian system was a linear system of differential equations. In this case a classical theorem of Poincare shows that if X is an eigenvalue of the linear system at (x^*, y^*) then $-X$ is also an eigenvalue. Thus the equilibrium of the Hamiltonian system are symmetric saddle points. In the general case, where the Hamiltonian is nonlinear, the same kind of saddle point property occurs when the function is concave in x and convex in y .

The Lyapunov exponents correspond to the original price index matrix's steady states where it is defined across the tensor and not just the direct sum. This enforces braiding and allows a flattened pareto optima matrix. Note: this flattened matrix is actually given by the diffusion map below, which can be formed due to the conjugate dual definition of A . The commodities in composed protocols correspond to "ETFs" or synthetic financial products constructed out of the configuration of many states in a certain order following the global enrichment.

Transition Matrices for ConTop

Dynamical systems where stability is of concern are often described in terms of Ergodicity, or the tendency for a system state to always return to a starting mode. Up until this point we have extended the the locally unstable globally stable Morse Smale systems with the ordinary poincare metric and extended this (trivially) with the Fisher information metric. This connects the berve/atlas space for Gibbs Microcanonical Partition Functions of Entropic forces⁹⁸ to the theory of Entropic forces as $\partial N \cong$ has units of inverse of energy and corresponds the locallu unstable manifold. Both manifolds are then bound by the Freedholm equation $(g(t), (125)$, which is essentially just the coherence complex defined cohomologically. In turn the Freedholm formulation is connected to the theory of Entropic forces, as we will show bellow. First, a closed form Markov Partition and matrix transition formulation of Contop is formed for computational refinement.

⁹⁸³⁴ <https://www.mdpi.com/1099-4300/18/8/309/htm> which

Transition Matrix for ConTop with n-state channels

Consensus probability can be formed in terms of opinion formation which is a prototypical class of markov process on a network⁹⁹. The probability of consensus or convergence of the protocol complex can be defined in terms of the DeGroot model by imposing a conservation of opinions where $\sum_{i=1}^N F_i^{DG, disc} x_i(n)$ is conserved over time for positive constants $F_i^{DG, disc}$ (with $i \in 1 \dots N$) where the superscript “disc” stands for discrete time and $\sum_{i=1}^N F_i^{DG, disc} = 1$. This implies that $F_i^{DG, disc}$ quantifies the influence of v_i on the final opinion in consensus. By imposing this conservation law, one obtains

$$\sum_{i=1}^N F_i^{DG, disc} x_i(n-1) = \sum_{i=1}^N F_i^{DG, disc} x_i(n) = \sum_{i=1}^N F_i^{DG, disc} x_i(n) \left(\sum_{j=1}^N A_{ji} x_j(n-1) \right) \quad (134)$$

by requiring that the above holds for (*with* $x_i(n-1)$) $i \in 1 \dots N$

$$F_i^{DG, disc} = \sum_{j=1}^N A_{ji} F_j^{DG, disc} \quad (135)$$

where $F_i^{DG, disc}$ is the stationary density of a DTRW (discrete time random walk) and whose transition-probability matrix is A^\top the adjacency matrix of the edge-reversed network D^{rev} . For the continuous case of node influence metrics x we have

$$\frac{dx(t)}{dt} = (A^\top - D^{rev}) x(t) \equiv -L^{rev} x(t) \quad (136)$$

where D^{rev} is the diagonal matrix whos (i, i) th element equals s_{out}^{in} and L^{rev} is the combinatorial Laplacian matrix for the edge-reversed network. The left eigenvector of L^{rev} corresponding to eigenvalue 0 gives the station-ary density of the Poissonian edge-centric CTRW on the edge-reversed network. The corresponding right eigenvector gives the asymptotic state of the continuous-time DeGroot model. This also has an interpretation as linear synchronization dynamics that results from linearizing nonlinear systems such as Dirichlet forms above.

Thus for L_0 consensus occurring linearly across the free dimension of the enrichment $n \in 1 \dots + \infty \subseteq \mathcal{N}$, define the vector form of the dynamics as the following recurrent matrix equation

$$x(n) = A^\top x(n-1) \quad (137)$$

where $x(n) = (x_1(n), \dots, x_N(n))^\top$ are the opinions or proposals of all proposing nodes $v \in v_i$. The initial opinion $x_i(0)$ of the final opinion $O : x_1^* = \dots = x_N^*$ of

⁹⁹5.7 <https://arxiv.org/pdf/1612.03281.pdf>

consensus. If O is close to $x_i(0)$ one interprets node v_i as being influential. If such a conserved quantity exists, one obtains

$$O = \sum_{i=1}^N F_i^{DG, disc} x_i(0) = \sum_{i=1}^N F_i^{DG, disc} x_i^* = x_1^* = \dots = x_N^* \quad (138)$$

If we consider the observation to follow a poisson distribution (such as the poisson-dirichlet form) then for observations given by poisson process $p(t)$ with edge rate $NA_{i,j} / \sum_{i',j'=1}^N A_{i',j'}$ and an event induces a local consensus event (equivalently to opinion dynamics) for a single random walker the master equation it satisfies is

$$\frac{dp(t)}{dt} = p(t)(A^\top - D^{rev}) \equiv -P(t)L^{rev} \quad (139)$$

Then the consensus probability F_i^{ED} for each node is given by the equilibrium of $\frac{dp(t)}{dt}$. That is equation it satisfies is

$$(F_1^{ED} \dots F_n^{ED})L^{rev} = 0 \quad (140)$$

We can obtain an intuitive understanding of above by writing a recursive equation for the consensus probability when the process starts from a single node v_i with opinion 0 (i.e., for F_i^{ED}). We obtain

$$F_i^{ED} = \frac{A_{i,j}}{\sum_{j'=1}^N A_{i',j'}} + \frac{\sum_{j=1}^N A_{j,i}}{\sum_{j'=1}^N A_{i',j'}} \times 0 + \frac{\sum_{i',j'=1; i'=i; j'=j}^N A_{i',j'}}{\sum_{i',j'=1}^N A_{i',j'}} \quad (141)$$

where $F_{i,j}^{ED} = F_i^{ED} + F_j^{ED}$ is the probability that one reaches the consensus of opinion 0 starting from the configuration in which v_i and v_j but no other nodes have opinion 0. Thus we have our functional probability of convergence given by

$$\sum A_{i,j} F_j^{ED} = F_j^{ED} \sum A_{ji} = (F_1^{ED} \dots F_n^{ED})L^{rev} = 0 \quad (142)$$

If the network is directed, we obtain a first-order approximation to the consensus probability of a node by applying Eq81¹⁰⁰

$$F_i^{ED} = (const) \times \frac{s_i^{out} n}{s_{out}^{in}} \quad (143)$$

which is isomorphic to the calculation of utility based on efficiency of a thermoelectric system.

¹⁰⁰<https://arxiv.org/pdf/1612.03281.pdf>

Transition Matrix for ConTop L_0 and Forgery Probability

The transition-probability matrix T has elements T_{ij} , which give the probability that a walker (state of network) moves from v_i to v_j , of

$$T_{i,j} = \frac{A_{ij}}{s_{in}^{out}} |s_{in}^{out} > 0 \quad (144)$$

and $\sum T_{i,j} = 1$, for the largest eigenvalue $\lambda_l \leq 1$ for directed graphs such as ConTop. This transform, called the “graph Fourier transform”, generalizes the standard Fourier transform of an RW [see Eqs. (3) and (7)], and the eigenvectors of the transition-probability matrix T play the role of the Fourier modes.

For a transition-probability matrix T representing consensus, the Exit Probability can be used to determine the criteria for Forgery, or an invalid state in L_0 . The transition-probability matrix T then has the following form

$$T = \begin{pmatrix} Q & R \\ 0 & I \end{pmatrix} \quad (145)$$

where Q is an $N_1 \times N_1$ matrix that describes transitions between transient-state nodes, R is an $N_1 \times N_2$ matrix that describes transitions from transient-state nodes to absorbing-state nodes, and I is the $N_2 \times N_2$ identity matrix that corresponds to individual absorbing-state nodes. Taking powers of T yields

$$T^n = \begin{pmatrix} Q^n & R(I + Q \dots Q^{n-1}) \\ 0 & I \end{pmatrix} \quad (146)$$

Suppose that we start from transient-state node v_i and want to calculate the mean number of visits to transient-state node v_j before reaching an absorbing-state node. This number of visits is equal to the (i,j) th element of the matrix

$$W = \sum_{n=0}^{\infty} Q^n = (I - Q)^{-1} \quad (147)$$

because the (i,j) th element of Q^n is equal to the probability that a random walker starting from v_i visits v_j at discrete time n . The matrix W is called the “fundamental matrix” associated with Q . The matrix on the right-hand side of W is called the “resolvent” of Q . Similar considerations arise in the study of “central” (i.e., important) nodes in networks as described above. The “exit probability” (i.e., the “first-passage-time probability”) is defined as the probability U_{ij} that the walker terminates at an absorbing state v_j when it starts from a transient state v_i . When there are multiple absorbing-state nodes, it is nontrivial to determine the exit probability. The probability that the walker reaches v_j after exactly n steps is given by the (i,j) th element of $Q^{n-1}R$. Therefore, we obtain the exit probability in matrix form as follows:

$$U = \sum_{n=0}^{\infty} Q^{n-1}R = WR \quad (148)$$

Thus we can determine the time limit for convergence in terms of \aleph as the exit probability for $v - 3$ byzantine nodes and $v - 1$. If $p(\aleph(t)) < \frac{\|U(v_b - v)\|}{\|U(v)\|}$ then for byzantine nodes (v_b) then the error bounds are

$$\|U(v)\| \times p(\aleph(t)) > \|U(v_b - v)\| \quad (149)$$

which means that the time to make one proposal must be bound by the time taken to make all proposals made by the computational complexity of \aleph .

Thus, for L_0 at any point each node creates a probability distribution based on a special type of random walk called a self avoiding walk which comprises the entries of A^\top that is normalized across all v_r such that $\sum_{j=1}^r = 1$. For L_0 the value s_{in}^{out} is given by the seeder/leecher ratios of states reserving each other's throughput. Thus we have

$$T(v) = \frac{1}{\sqrt{s_v}} A^\top S_v \quad (150)$$

Examples: HGTP

In HGTP, utility is given by oraclization of external data, the application of consensus to validate data and by throughput or the rate at which data is notarized and validated. Like all consensus protocols, access to rewards is governed by facilitator selection. In turn, facilitator selection is governed by a decentralized locality sensitive hashing mechanism which organizes the network by a utility seeder-leecher-ratio of transactions validated vs transactions submitted. The LSH for facilitator selection of L_1 is the given by the Bitwise exclusive-or or XOR distance between the first sha256 hash of the first Fiber in a Bundle's transaction hash.

Reputation is equivalent to the throughput a facilitator has provided vs. the throughput used, as well as the efficacy of oraclization-notarization and validation. As nodes participate, they are ranked based on their reputation. The magnitude of rewards and reputation is proportional to a rank. Fees are charged relative to the scarcity of the throughput and only if an account breaches its allotted utility ratio.

Apart from being the first fixed-total-supply asset accessible throughout the platform, the \$DAG token ¹⁰¹ acts as a credit mechanism, like cash, which, like Etheruems gas ¹⁰², can be used to pay transaction fees when an account has not or can not maintain their required utility ratio. The \$DAG token is also injected

¹⁰¹awesome-constellation information on the \$DAG token
<https://github.com/Constellation-Labs/awesome-constellation#the-dag-token>
¹⁰²Section 4.2 EthereumYellowpaper
<https://ethereum.github.io/yellowpaper/paper.pdf>

into the pool of validator rewards and there is incentive to validate transactions that have an accompanying fee attached.

The value of our network derives from the aforementioned total computational space available for verifying transactions, which corresponds to its maximum processing power and throughput. Since our data model is a data dependency graph with hashes linking collections of data, we can equate value to the total amount of storage space that it can contain. Thus we use a calculation of the “volume” of an account’s contributions relative to the total volume of the data dependency graph to define validator rewards, distributed in the form of reputation and \$DAG. The number of *Signed Observation Edge* (SOE) ¹⁰³ which link collections in our data dependency graph, is a quantifier for this performance. We then weight this contribution by its relative information gain or its smallness measure of entropy, according to the distribution of all accounts’ entropy measures. Note that an account/node can be attributed to multiple Cells.

If we consider each SOE as a basis of given rank r in the space of the data dependency graph, we can calculate this volume as the integral over the outer product space of these basis, which is a differential r -form. The notion of volume of space of the nodes across ranks 1 through r is $\int_{\mathcal{M}} \epsilon_1 \wedge \cdots \wedge \epsilon_r$. Here \mathcal{M} is a manifold and ϵ_r is a basis of the vector space of rank r . Each collection in the data dependency graph has the basis and rank of the node that emitted it. Within our model this would be explicitly defined as the numerical integration over the outer product of our cohomological definition ¹⁰⁴, which is a vector space given by the tensor product of each space across ranks $\sum_{1 \dots r} \Gamma^{\epsilon_1} \otimes \cdots \otimes \Gamma^{\epsilon_r}$. Each Γ^{ϵ_i} is a manifold corresponding to a rank in the differential form above, subordinate to the rank before it. If we assume a uniform data transmission, we can define bandwidth in SOE/s as the total space ¹⁰⁵ of the resources given by each node

$$B_{\text{SOE/s}} = \sum_{i \in \{1, \dots, r\}} \int \rho_i \theta_i \omega,$$

where ρ_i is a partition of unity and θ_i is a discrete diffeomorphism on our spaces r -form, ω . This amounts to the effect that the protocol has on the total configuration space.

By mapping each entry in the bandwidth space to its normalized Shannon

¹⁰³constellationlabs.io blog

<https://constellationlabs.io/blog/index.php/how-constellation-is-different-than-blockchain/>

¹⁰⁴Blockchain cohomology text

<https://arxiv.org/abs/1805.07047>

¹⁰⁵ftp.cis.upenn text on diff. geo., see sec 9.2

ftp.cis.upenn.edu/pub/cis610/public_html/diffgeom4.pdf

entropy, giving a measure of performance in terms of relative information gain:

$$B_{\text{Entropy}} = \sum_{i \in \{1, \dots, r\}} \int \rho_i H_i \omega.$$

Here $H_i(p) = -\frac{1}{\log_b(i)} \sum_j p_j \log_b(p_j)$ is the normalized Shannon entropy, where p is a discrete probability measure of how the result of a node's actions deviate from the acceptable state of the protocol and b is our base. The later is binary, as we deal with bits. Reduction in entropy can be seen as a measure of efficiency. Normalized entropy is advantageous as it scales with sample size and has shown effective at anomaly detection in networks ¹⁰⁶.

L_0 Steady States

L_1 Steady States

$L_0 \circ L_1$ (\$DAG) Steady States

HGTP Proof of Safety

Accrual of value for \$DAG Fibers

<https://arxiv.org/pdf/1802.03080.pdf> sec A-C <https://web.stanford.edu/~boyd/papers/pdf/fmmc.pdf> 3.1. Some Small Examples. (d)

whereas $T(v)$ above calculates steady states for converging consensus, we can use identities in the Utility theory of arbitrage to get a transition matrix for the price index which collapses the partition function of address balances.

Remarks

References

- [1] Baez, John C *Circuitry, EE and chain complexes*.
<https://math.ucr.edu/home/baez/week288.html>
- [2] Baez, John C *Physics, Topology, Logic and Computation: A Rosetta Stone*.
<https://arxiv.org/pdf/0903.0340.pdf>

¹⁰⁶Karthik, P. "Detecting Anomalies Based On Entropy-Estimation"
<http://ijsetr.org/wp-content/uploads/2013/07/IJSETR-VOL-2-ISSUE-4-910-915.pdf>

- [3] PIETER HOFSTRA AND PHILIP SCOTT *ASPECTS OF CATEGORICAL RECURSION THEORY*.
<https://arxiv.org/pdf/2001.05778.pdf>
- [4] David Spivak, Brendan Fong *Seven Sketches in Compositionality*.
<https://math.mit.edu/~dspivak/teaching/sp18/7Sketches.pdf>
- [5] Pierre Baudot *The Poincaré-Shannon Machine: Statistical Physics and Machine Learning Aspects of Information Cohomology*.
<https://www.mdpi.com/1099-4300/21/9/881>
- [6] Tobias Fritz *A synthetic approach to Markov kernels, conditional independence and theorems on sufficient statistics*.
<https://arxiv.org/pdf/1908.07021.pdf>
- [7] Tatsuya Hagino *A Categorical Programming Language*.
web.sfc.keio.ac.jp/~hagino/thesis.pdf