
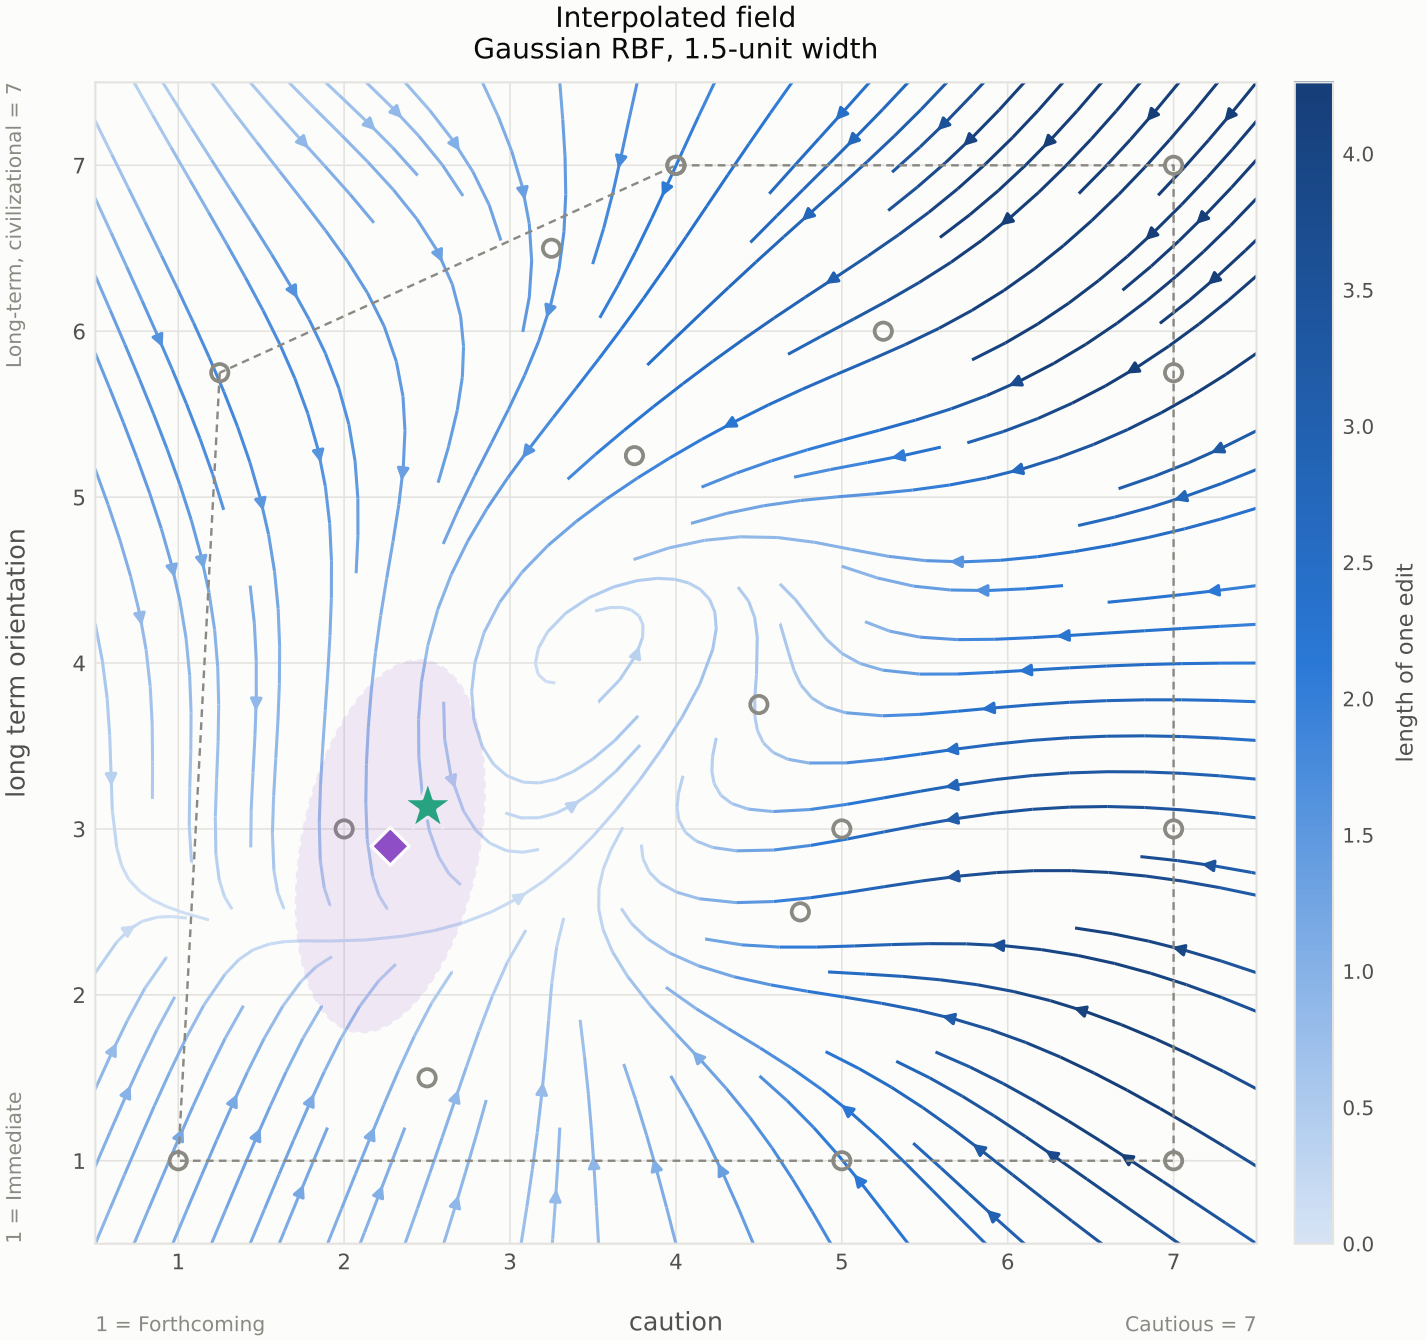


Qwen's edits, on the working plane

Seventeen starting points, their mean edit, and the fixed point they contract toward.
Twelve are published or researcher-written seeds; five are decoded, including one placed on the attractor itself. The right panel interpolates those mean edits.

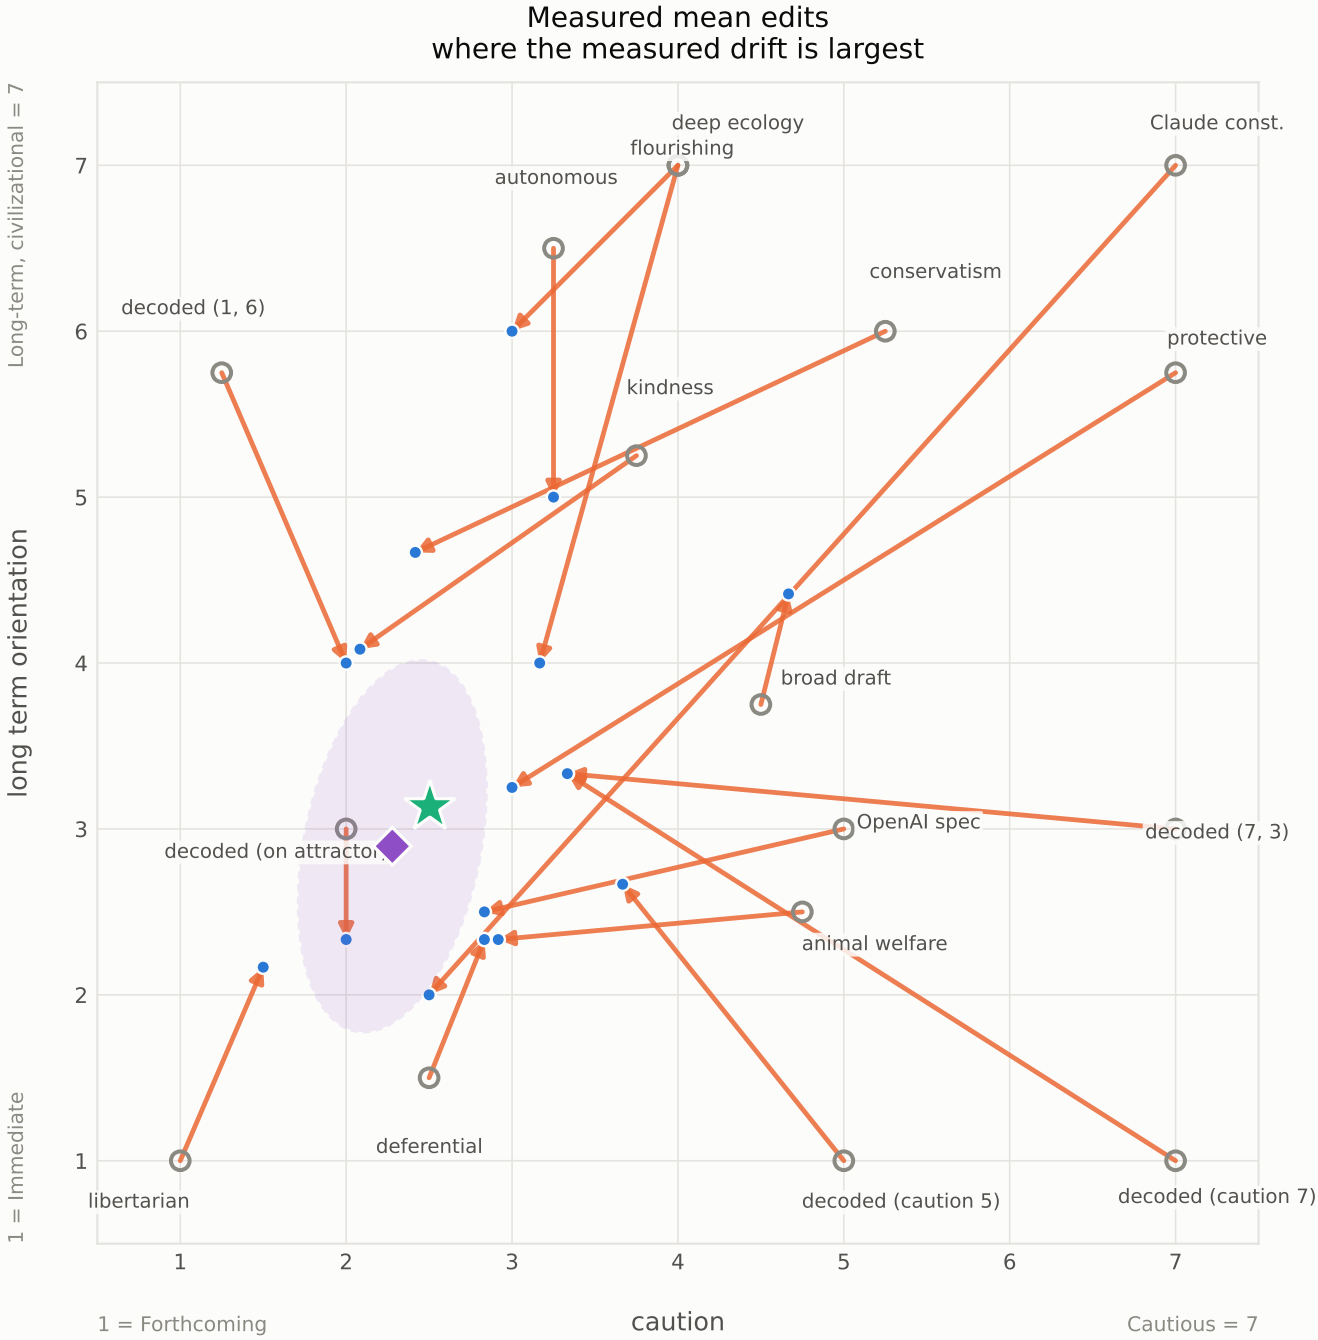

○ seed — mean edit vector ● after one edit ★ attractor ◆ blind drafts (mean, 1 SD) — interpolated field ---- convex hull