


# Example of aggregator

_time	_m	host	_field	_value
10:45	cpu	serverA	system	1000
11:00	cpu	serverB	system	2000
11:30	cpu	serverB	system	2000
11:45	cpu	serverA	system	3000
GroupKey[cpu, system]				

_time	_m	host	_field	_value
10:35	cpu	serverA	idle	100
11:15	cpu	serverB	idle	200
11:50	cpu	serverB	idle	400
GroupKey[cpu, idle]				

| > mean()

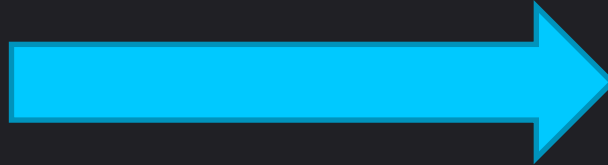

_m	_field	_value
cpu	system	2000
GroupKey[cpu, system]		
_m	_field	_value
cpu	idle	233,33
GroupKey[cpu, idle]		

NOTE: time and host columns get deleted