

# davos: a Python package “smuggler” for constructing lightweight reproducible notebooks

Paxton C. Fitzpatrick, Jeremy R. Manning\*

*Department of Psychological and Brain Sciences  
Dartmouth College, Hanover, NH 03755*

---

## Abstract

Reproducibility is a core requirement of modern scientific research. For computational research, reproducibility means that code should produce the same results, even when run on different systems. A standard approach to ensuring reproducibility entails packaging a project’s dependencies along with its primary code base. Existing solutions vary in how deeply these dependencies are specified, ranging from virtual environments, to containers, to virtual machines. Each of these existing solutions requires installing or setting up a system for running the desired code that must be packaged alongside the primary code base. Here we propose a lighter-weight solution than virtual environments: the **davos** library. When used in combination with a notebook-based Python project, the **davos** library provides a mechanism for specifying (and automatically installing) the correct package versions of the project’s dependencies. The **davos** library also ensures that those versions are in use any time the notebook’s code is executed. This enables researchers to share a complete reproducible copy of their code within a single Jupyter notebook file.

*Keywords:* Reproducibility, Open science, Python, Jupyter Notebook, Google Colaboratory, Package management

---

---

\*Corresponding author

*Email address:* [Jeremy.R.Manning@Dartmouth.edu](mailto:Jeremy.R.Manning@Dartmouth.edu) (Jeremy R. Manning)

## Required Metadata

### Current code version

Nr.	Code metadata description	Metadata value
C1	Current code version	v0.1.1
C2	Permanent link to code/repository used for this code version	<a href="https://github.com/ContextLab/davos/tree/v0.1.1">https://github.com/ContextLab/davos/tree/v0.1.1</a>
C3	Code Ocean compute capsule	
C4	Legal Code License	MIT
C5	Code versioning system used	git
C6	Software code languages, tools, and services used	Python, JavaScript, PyPI/pip, IPython, Jupyter, Ipykernel, PyZMQ. Additional tools used for tests: pytest, Selenium, Requests, mypy, GitHub Actions
C7	Compilation requirements, operating environments, and dependencies	Dependencies: Python $\geq 3.6$ , packaging, setuptools. Supported OSes: MacOS, Linux, Unix-like. Supported IPython environments: Jupyter notebooks, JupyterLab, Google Colaboratory, Binder, IDE-based notebook editors.
C8	Link to developer documentation/manual	<a href="https://github.com/ContextLab/davos#readme">https://github.com/ContextLab/davos#readme</a>
C9	Support email for questions	contextualdynamics@gmail.com

Table 1: Code metadata

## 1. Motivation and significance

The same computer code may not behave identically under different circumstances. For example, when code depends on external libraries, different versions of those libraries may function differently. Or when CPU or GPU instruction sets differ across machines, the same high-level code may be compiled into different machine instructions. Because executing identical code does not guarantee identical outcomes, code sharing in and of itself is often insufficient for enabling researchers to reproduce each other’s work.

Within the Python [1] community, external packages that are published in the most popular repositories [2, 3] are associated with version numbers and tags that enable users to guarantee that they are installing exactly the same

code across different computing environments. Despite that it is *possible* to manually install the intended version numbers of every dependency of a Python script or package, manually tracking down those dependencies can impose a substantial burden on the user.

Researchers, programmers, and others have developed a broad set of approaches and tools to facilitate code sharing and reproducible outcomes (Fig. 1). At one extreme, simply publishing a set of Python scripts (`.py` files) may enable others to use or gain insights into the relevant work. Because Python is installed by default on most modern operating systems, for some projects this may be sufficient. Another popular approach entails creating JSON files called Jupyter notebooks [4] that comprise a mix of text, executable code, and embedded media. Notebooks may call or import external scripts or libraries in order to provide a more compact and readable experience for users. Each of these systems (Python scripts and notebooks) provides a convenient means of sharing code, with the caveat that they do not specify the computing environment in which the code is executed. Therefore the functionality of code shared using these systems cannot be guaranteed across different computing environments.

At another extreme, virtual machines [5, 6, 7] provide a hardware-level simulation of the desired system. Virtual machines are typically isolated from the user’s system, such that installing or running software on a virtual machine does not impact the user’s primary operating system or computing environment. Containers [e.g., 8, 9] provide a similar “isolated” experience. Although containerized environments do not specify hardware-level operations, they are typically packaged with a complete operating system, in addition to a complete copy of Python and any relevant package dependencies. Virtual environments [e.g., 10] also provide a computing environment that is largely separated from the user’s main environment. They incorporate a copy of Python and the target software’s dependencies, but virtual environments do not specify or reproduce an operating system for the runtime environment. Each of these systems (virtual machines, containers, and virtual environments) guarantees (to differing degrees—at the hardware level, operating system level, and Python environment level, respectively) that the relevant code will run similarly for different users. However, each of these systems also relies on additional software that can be resource intensive or burdensome to install or configure.

We designed **davos** to occupy a “sweet spot” between these extremes. **davos** is a notebook-installable package that adds functionality to the default notebook experience. Like standard Jupyter notebooks, **davos**-enhanced notebooks allows researchers to include text, executable code, and media within a single file. No further setup or installation is required, beyond what

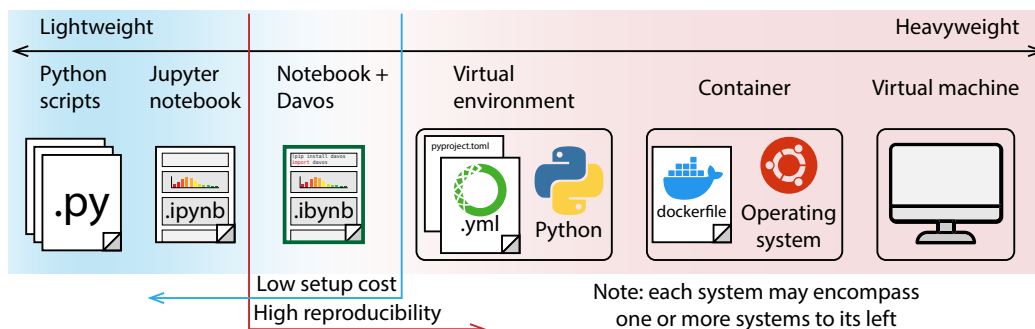


Figure 1: **Systems for sharing code within the Python ecosystem.** From left to right: plain-text **Python scripts** (`.py` files) provide the most basic “system” for sharing raw code. Scripts may reference external libraries, but those libraries must be manually installed on other users’ systems. Further, any checking needed to verify that the correct versions of those libraries were installed must also be performed manually. **Jupyter notebooks** (`.ipynb` files) comprise embedded text, executable code, and media (including rendered figures, code output, etc.). When the **davos** library is imported into a Jupyter notebook, the notebook’s functionality is extended to automatically install the required external libraries (at their correct versions, when specified). **Virtual environments** install an isolated copy of Python and all required dependencies. This typically requires defining a `requirements.txt` file or an environment (`.yaml`) file that specifies all project dependencies (including version numbers of external libraries). **Containers** provide a means of defining an isolated environment that includes a complete operating system (independent of the user’s operating system), in addition to (optionally) specifying a virtual environment or other configurations needed to provide the necessary computing environment. Containers are typically defined using specification files (e.g., a plain-text **Dockerfile**) that instruct the virtualization engine regarding how to build the virtual environment. **Virtual machines** provide a complete hardware-level simulation of the computing environment. In addition to simulating specific hardware, virtual machines (typically specified using binary images files) must also define operating system-level properties of the computing environment. Systems to the left of the blue vertical line entail sharing individual files, with no additional installation or configuration needed to run the target code. Systems to the right of the red vertical line support precise control over dependencies and versioning. Notebooks enhanced using the **davos** library are easily shareable and require minimal setup costs, while also facilitating high reproducibility by enabling precise control over project dependencies.

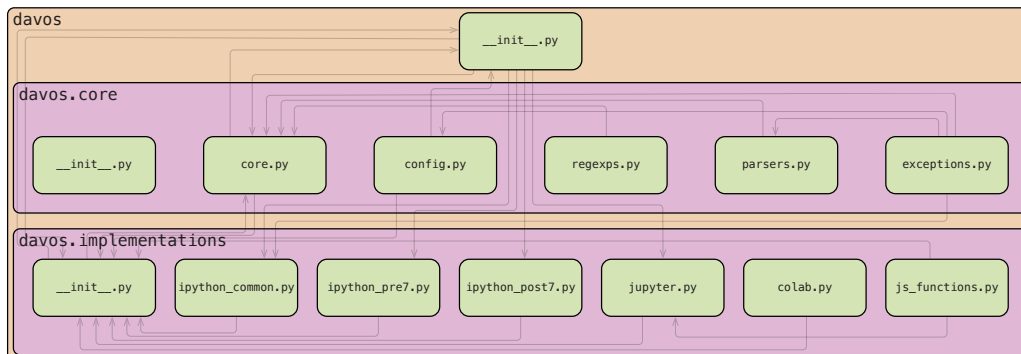


Figure 2: **Package structure.**

53 is needed to run standard Jupyter notebooks. And like virtual environments,  
 54 **davos** provides a convenient mechanism for fully specifying (and installing, as  
 55 needed) a complete set of Python dependencies, including package versions.

## 56 2. Software description

### 57 2.1. Software architecture

58 The **davos** package consists of two interdependent subpackages (see Fig. 2).  
 59 The first, **davos.core**, comprises a set of modules that implement the bulk of  
 60 the package’s core functionality, including pipelines for installing and validat-  
 61 ing packages, custom parsers for the **smuggle** statement (see Section 2.2.1)  
 62 and onion comment (see Section 2.2.2), and a runtime interface for config-  
 63 uring **davos**’s behavior (see Section 2.2.3). However, certain critical aspects  
 64 of this functionality require (often substantially) different implementation  
 65 approaches depending on various properties of the notebook environment  
 66 in which **davos** is used (e.g., whether the frontend is provided by Jupyter  
 67 or Google Colaboratory, or which version of IPython [11] is used by the  
 68 notebook kernel). To deal with this, environment-dependent parts of core  
 69 features and behaviors are isolated and abstracted to “helper functions” in  
 70 the **davos.implementations** subpackage. This second subpackage defines  
 71 multiple, interchangeable versions of each helper function, organized into  
 72 modules by the conditions that trigger their use. At runtime, **davos** detects  
 73 various features in the notebook environment and selectively imports a single  
 74 version of each helper function into the top-level **davos.implementations**  
 75 namespace, allowing **davos.core** modules to access the correct implementa-  
 76 tions for the current notebook environment in a single, consistent location.  
 77 An additional benefit of this design pattern is that it allows maintainers or  
 78 users to easily extend **davos** to support new, updated, or custom notebook

79 variants simply by creating a new `davos.implementations` module with any  
80 necessary tweaks to existing helper functions.

## 81 *2.2. Software functionalities*

### 82 *2.2.1. The `smuggle` statement*

83 Importing `davos` in an IPython notebook enables an additional Python  
84 keyword: “`smuggle`” (see Section 2.3 for details on how this works). The  
85 `smuggle` statement can be used as a drop-in replacement for Python’s built-  
86 in `import` statement to load libraries, modules, and other objects into the  
87 current namespace. However, whereas `import` will fail if the requested pack-  
88 age is not installed locally, `smuggle` statements can handle missing packages  
89 on the fly. If a smuggled package does not exist in the local environment,  
90 `davos` will install it automatically, expose its contents to Python’s `import`  
91 machinery, and load it into the namespace for immediate use.

### 92 *2.2.2. The onion comment*

93 For greater control over the behavior of `smuggle` statements, `davos` de-  
94 fines an additional construct called the “onion comment”. An onion comment  
95 is a special type of inline comment that may be placed on a line containing a  
96 `smuggle` statement to customize how `davos` searches for the smuggled pack-  
97 age locally and, if necessary, downloads and installs it. Onion comments  
98 follow a simple syntax based on the “type comment” syntax introduced in  
99 PEP 484 [12], and are designed to make managing packages with `davos` intu-  
100 itive and familiar. To construct an onion comment, simply provide the name  
101 of the installer program (e.g., `pip`) and the same arguments one would use  
102 to manually install the package as desired via the command line:

```
import davos

# if numpy is not installed locally, pip-install it and display verbose output
smuggle numpy as np      # pip: numpy --verbose

# pip-install pandas without using or writing to the package cache
smuggle pandas as pd     # pip: pandas --no-cache-dir

# install scipy from a relative local path, in editable mode
from scipy.stats smuggle ttest_ind      # pip: -e ../../pkgs/scipy
```

103

104 Onion comments are useful when smuggling a package whose distribution  
105 name (i.e., the name used when installing it) is different from its top-level  
106 module name (i.e., the name used when importing it):

```

smuggle dateutil      # pip: python-dateutil
from sklearn.decomposition smuggle PCA      # pip: scikit-learn

```

107

108 However, the most powerful use of the onion comment is making **smuggle**  
 109 statements *version-sensitive*. If an onion comment includes a version spec-  
 110 ifier [13], **davos** will ensure that the version of the package loaded into the  
 111 notebook matches the specific version requested, or satisfies the given ver-  
 112 sion constraints. If the smuggled package exists locally, **davos** will extract  
 113 its version info from its metadata and compare it to the specifier provided. If  
 114 the two are incompatible (or no local installation is found), **davos** will install  
 115 and load a suitable version of the package instead:

```

# specifically use matplotlib v3.4.2, pip-installing it if needed
smuggle matplotlib.pyplot as plt      # pip: matplotlib==3.4.2

# use a version of seaborn no older than v0.9.1, but before v0.11
smuggle seaborn as sns      # pip: seaborn>=0.9.1,<0.11

```

116

117 Onion comments can similarly be used to smuggle specific VCS references  
 118 (e.g., Git [14] branches, commits, tags, etc.):

```

# use quail as the package existed on GitHub at commit 6c847a4
smuggle quail      # pip: git+https://github.com/ContextLab/quail.git@6c847a4

```

119

120 **davos** processes onion comments internally before forwarding arguments to  
 121 the installer program. In addition to preventing onion comments from being  
 122 used as a vehicle for shell injection attacks, this allows **davos** take certain  
 123 logical actions when particular arguments are passed. For example, the `-I/-`  
 124 `--ignore-installed`, `-U/--upgrade`, and `--force-reinstall` flags will all  
 125 cause **davos** to skip searching for a smuggled package locally before installing  
 126 a new copy:

```

# install hypertools v0.7 without first checking for it locally
smuggle hypertools as hyp      # pip: hypertools==0.7 --ignore-installed

# always install the latest version of requests, including pre-releases
from requests smuggle Session      # pip: requests --upgrade --pre

```

127

128 Similarly, passing `--no-input` will temporarily enable **davos**'s non-interactive  
 129 mode (see Section 2.2.2), and installing a smuggled package into `<dir>` with  
 130 `--target <dir>` will cause `dir` to be prepended to the module search path  
 131 (`sys.path`), if necessary, so the package can be imported

132 *2.2.3. The `davos` config*

133 The `davos` config object provides a simple, high-level interface that allows  
134 users to view and set various options that affect `davos`'s behavior. After  
135 importing `davos`, the config instance (a singleton) for the current session is  
136 available as `davos.config`, and its various fields are accessible as attributes.  
137 The config object exposes a mixture of writable and read-only fields. Writable  
138 fields include:

- 139 • `.active`: Whether or not `davos` functionality (i.e., support for `smug-`  
140 `gle` statements and onion comments) should be enabled for subsequent  
141 code. Defaults to `True` when `davos` is first imported. See Section 2.3  
142 for additional info.
- 143 • `.auto_rerun`: Controls behavior if `davos` is used to `smuggle` a new ver-  
144 sion of a package that was previously imported and cannot be reloaded  
145 (i.e., it contains C-extensions that dynamically generate code). If `True`  
146 (default: `False`), `davos` will automatically restart the notebook kernel  
147 and rerun all code up to (and including) the current `smuggle` state-  
148 ment. Otherwise, `davos` will issue a warning, pause execution, and  
149 prompt the user with buttons to either restart & rerun the notebook  
150 or continue running with the imported package version. (Note: not  
151 configurable in Google Colaboratory).
- 152 • `.confirm_install`: If `True` (default: `False`), `davos` will require user  
153 confirmation (`[y]es/[n]o` input) before installing a smuggled package.
- 154 • `.noninteractive`: Setting to `True` (default: `False`) enables non-interactive  
155 mode, in which all user input and confirmation is disabled. Note that  
156 in non-interactive mode, the `confirm_install` option is set to `False`,  
157 and if `auto_rerun` is `False`, `davos` will throw an error if a smuggled  
158 package cannot be reloaded.
- 159 • `.pip_executable`: The path to the `pip` executable used to install  
160 smuggled packages. Default is programmatically determined from the  
161 Python environment and falls back to `sys.executable -m pip` if one  
162 can't be found.
- 163 • `.suppress_stdout`: If `True` (default: `False`), suppress all unnecessary  
164 output issued by both `davos` and the installer program. Useful when  
165 smuggling packages that need to install many dependencies and/or gen-  
166 erate extensive output. If the installer program throws an error, both  
167 stdout and stderr will be shown with the traceback.



168 The top-level `davos` namespace additionally defines a handful of convenience  
169 functions for setting and checking `davos`’s active/inactive state (`davos.activate()`;  
170 `davos.deactivate()`; `davos.is_active()`) as well as the `davos.configure()`  
171 function, which allows setting multiple config fields at once.

#### 172 2.2.4. Advanced functionality

173 Because `davos` parses onion comments at runtime, required packages are  
174 validated and installed in a just-in-time manner. Thus, it is possible in most  
175 cases to `smuggle` a specific package version or revision

#### 176 2.3. Implementation details

177 Functionally, importing `davos` appears to define “`smuggle`” as a Python  
178 keyword, similar to “`import`”, “`def`”, or “`return`”. It also appears to cause  
179 comments to be parsed, and their contents potentially able to affect code  
180 behavior, which they normally are not. However, `davos` doesn’t actually  
181 modify the rules of Python’s parser or lexical analyzer—in fact, modifying  
182 the Python grammar isn’t possible at runtime, as doing so would require  
183 rebuilding the interpreter. Instead, `davos` leverages the IPython notebook  
184 backend to implement the `smuggle` statement and onion comment via a com-  
185 bination of namespace injections and its own (far simpler) custom parser.

186 The `smuggle` keyword can be enabled and disabled at any time by “ac-  
187 tivating” and “deactivating” `davos` (see Section 2.2.3, above). When `davos`  
188 is first imported, it is activated automatically. Activating `davos` triggers  
189 two actions: (1) the `smuggle()` function is injected into the IPython user  
190 namespace, and (2) the `davos` parser is registered as a custom IPython input  
191 transformer. IPython preprocesses all executed code as plain text before it is  
192 sent to the Python parser, in order to handle special constructs like `%magic`  
193 and `!shell` commands. `davos` hooks into this process to transform `smuggle`  
194 statements into syntactically valid Python code. The `davos` parser uses a  
195 complex regular expression [15] to match lines of code containing `smuggle`  
196 statements (and, optionally, onion comments), extract relevant information  
197 from their text, and replace them with equivalent calls to the `smuggle()`  
198 function. For example, if a user runs a notebook cell containing

```
199 smuggle numpy as np      # pip: numpy>1.16,<=1.20 -vv
```

200 the code that is actually executed by the Python interpreter would be

```
smuggle(name="numpy", as_="np", installer="pip",  
        args_str="\"numpy>1.16,<=1.20 -vv\"",  
        installer_kwargs={'editable': False,  
                          'spec': 'numpy>1.16,<=1.20',  
                          'verbosity': 2})
```

201

202 Because the `smuggle()` function is defined in the notebook namespace, it is  
203 also possible (though never necessary) to call it directly. Deactivating `davos`  
204 will delete the name “`smuggle`” from the namespace, unless its value has  
205 been overwritten and no longer refers to the `smuggle()` function. It will also  
206 deregister the `davos` parser from the set of input transformers run when each  
207 notebook cell is executed. While the overhead added by the `davos` parser is  
208 de minimis, this may be useful, for example, when optimizing or precisely  
209 profiling code.

### 210 3. Illustrative Examples

### 211 4. Impact

212 Like virtual environments, containers, and virtual machines, the `davos` li-  
213 brary (when used in conjunction with Jupyter notebooks) provides a lightweight  
214 mechanism for sharing code and ensuring reproducibility across users and  
215 computing environments (Fig. 1). Further, `davos` enables users to fully  
216 specify (and install, as needed) any project dependencies within the same  
217 notebook. This provides a system whereby executable code (along with text  
218 and media) *and* code for setting up and configuring the project dependencies,  
219 may be combined within a single notebook file.

220 We designed `davos` for use in research applications. For example, in many  
221 settings `davos` may be used as a drop-in replacement for more-difficult-to-  
222 set-up virtual environments, containers, and/or virtual machines. For re-  
223 searchers, this lowers barriers to sharing code. By eliminating most of the  
224 setup costs of reconstructing the original researchers’ computing environ-  
225 ment, `davos` also lowers barriers to entry for members of the scientific com-  
226 munity and the public who seek to *benefit* from shared code.

227 Beyond research applications, `davos` is also useful in pedagogical settings.  
228 For example, in programming courses, instructors and students may import  
229 the `davos` library into their notebooks to provide a simple means of ensur-  
230 ing their code will run on others’ machines. When combined with online  
231 notebook-based platforms like Google Colaboratory, `davos` provides a con-  
232 venient way to manage dependencies within a notebook, without requiring  
233 any software (beyond a web browser) to be installed on the students’ or in-  
234 structors’ systems. For the same reasons, `davos` also provides an elegant  
235 means of sharing ready-to-run notebook-based demonstrations that install  
236 their dependencies automatically.

237 Since its initial release, `davos` has found use in a variety of applications.  
238 In addition to managing computing environments for multiple ongoing re-  
239 search studies, `davos` is being used by both students and instructors in pro-  
240 gramming and methods courses such as Storytelling with Data [16] (an open

241 course on data science, visualization, and communication) and Laboratory  
242 in Psychological Science [17] (an open course on experimental and statistical  
243 methods for psychology research) to simplify distributing lessons and sub-  
244 mitting assignments, as well as in online demos such as **abstract2paper** [18]  
245 (an example application of GPT-Neo [19, 20]) to share ready-to-run code  
246 that installs dependencies automatically.

247 Our work also has several more subtle “advanced” use cases and poten-  
248 tial impacts. Whereas Python’s built-in **import** statement is agnostic to  
249 packages’ version numbers, **smuggle** statements (when combined with onion  
250 comments) are version-sensitive. This enables multiple versions of a single li-  
251 brary to be imported within the same notebook. This could be useful in cases  
252 where specific features were added or removed from a package across differ-  
253 ent versions, or in comparing the performance or functionality of particular  
254 features across different versions of the same package.

255 A second advanced use case is in providing a proof-of-concept of how one  
256 can add new “keyword-like” operators to the Python language by leverag-  
257 ing notebooks’ error-handling mechanisms. This could lead to exciting new  
258 tools that, like **davos**, extend the Python language in useful ways within  
259 notebook-based environments. We note that our approach to adding the  
260 **smuggle** keyword to Python when **davos** is imported into a notebook-based  
261 environment also has the potential to be exploited for more nefarious pur-  
262 poses. For example, a malicious user could use a similar approach (e.g.,  
263 in a different library) to substantially change a notebook’s functionality by  
264 adding new *unexpected* keyword-like objects (e.g., based around common ty-  
265 pos). This could lead to difficult-to-predict changes in a notebook’s behavior  
266 once the malicious library was imported. This highlights an important rea-  
267 son why security-conscious users would be well-served to only make use of  
268 libraries from trusted sources, or whose code is publicly available for review.

## 269 5. Conclusions

270 The **davos** library supports reproducible research by providing a novel  
271 lightweight system for sharing notebook-based code. But perhaps the most  
272 exciting uses of the **davos** library are those that we have *not* yet considered  
273 or imagined. We hope that the Python community will find **davos** to pro-  
274 vide a convenient means of managing project dependencies to facilitate code  
275 sharing. We also hope that some of the more advanced applications of our  
276 library might lead to new insights or discoveries.

## 277 **Author Contributions**

278 **Paxton C. Fitzpatrick:** Conceptualization, Methodology, Software,  
279 Validation, Writing - Original Draft, Visualization. **Jeremy R. Manning:**  
280 Conceptualization, Resources, Validation, Writing - Review & Editing, Su-  
281 pervision, Funding acquisition.

## 282 **Funding**

283 Our work was supported in part by NSF grant number 2145172 to JRM.  
284 The content is solely the responsibility of the authors and does not necessarily  
285 represent the official views of our supporting organizations.

## 286 **Declaration of Competing Interest**

287 We wish to confirm that there are no known conflicts of interest associated  
288 with this publication and there has been no significant financial support for  
289 this work that could have influenced its outcome.

## 290 **Acknowledgements**

291 We acknowledge useful feedback and discussion from the students of  
292 JRM's *Storytelling with Data* course (Winter, 2022 offering) who used pre-  
293 liminary versions of our library in several assignments.

## 294 **References**

- 295 [1] G. van Rossum, Python reference manual, Department of Computer  
296 Science [CS] (R 9525) (1995).
- 297 [2] Python Software Foundation, The Python Package Index (PyPI),  
298 <https://pypi.org> (2003).
- 299 [3] conda-forge community, The conda-forge Project: Community-based  
300 Software Distribution Built on the conda Package Format and Ecosys-  
301 tem, <https://doi.org/10.5281/zenodo.4774217> (July 2015). doi:  
302 [10.5281/zenodo.4774217](https://doi.org/10.5281/zenodo.4774217).
- 303 [4] T. Kluyver, B. Ragan-Kelley, F. Pérez, B. Granger, M. Bussonnier,  
304 J. Frederic, K. Kelley, J. Hamrick, J. Grout, S. Corlay, P. Ivanov,  
305 D. Avila, S. Abdalla, C. Willing, Jupyter notebooks – a publish-  
306 ing format for reproducible computational workflows., in: F. Loizides,

- 307 B. Schmidt (Eds.), Positioning and Power in Academic Publishing: Play-  
 308 ers, Agents and Agendas, IOS Press, Netherlands, 2016, pp. 97–90.  
 309 [doi:10.3233/978-1-61499-649-1-87](https://doi.org/10.3233/978-1-61499-649-1-87).
- 310 [5] R. P. Goldberg, Survey of virtual machine research, Computer 7 (6)  
 311 (1974) 34–45.
- 312 [6] Y. Altintas, C. Brecher, M. Weck, S. Witt, Virtual ma-  
 313 chine tool, CIRP Annals 54 (2) (2005) 115–138. [doi:https://doi.org/10.1016/S0007-8506\(07\)60022-5](https://doi.org/10.1016/S0007-8506(07)60022-5).  
 314 URL [https://www.sciencedirect.com/science/article/pii/](https://www.sciencedirect.com/science/article/pii/S0007850607600225)  
 315 [S0007850607600225](https://www.sciencedirect.com/science/article/pii/S0007850607600225)
- 317 [7] M. Rosenblum, VMware’s Virtual Platform: A virtual machine monitor  
 318 for commodity PCs, in: IEEE Hot Chips Symposium, IEEE, 1999, pp.  
 319 185–196.
- 320 [8] D. Merkel, Docker: lightweight linux containers for consistent develop-  
 321 ment and deployment, Linux Journal 239 (2) (2014) 2.
- 322 [9] G. M. Kurtzer, V. Sochat, M. W. Bauer, Singularity: Scientific contain-  
 323 ers for mobility of compute, PLoS One 12 (5) (2017) e0177459.
- 324 [10] Anaconda, Inc., conda, <https://docs.conda.io> (2012).
- 325 [11] F. Pérez, B. E. Granger, Ipython: a system for interactive scientific  
 326 computing, Computing in science & engineering 9 (3) (2007) 21–29.  
 327 [doi:10.1109/MCSE.2007.53](https://doi.org/10.1109/MCSE.2007.53).
- 328 [12] G. van Rossum, J. Lehtosalo, L. Langa, Type Hints, PEP 484, Python  
 329 Software Foundation (September 2014).  
 330 URL <https://www.python.org/dev/peps/pep-0484>
- 331 [13] N. Coghlan, D. Stufft, Version identification and dependency specifica-  
 332 tion, PEP 440, Python Software Foundation (March 2013).  
 333 URL <https://peps.python.org/pep-0440>
- 334 [14] L. Torvalds, J. Hamano, Git: Fast version control system, [https://](https://git.kernel.org/pub/scm/git/git.git)  
 335 [git.kernel.org/pub/scm/git/git.git](https://git.kernel.org/pub/scm/git/git.git) (April 2005).
- 336 [15] K. Thompson, Programming Techniques: Regular expression search al-  
 337 gorithm, Communications of the ACM 11 (6) (1968) 419–422. [doi:](https://doi.org/10.1145/363347.363387)  
 338 [10.1145/363347.363387](https://doi.org/10.1145/363347.363387).
- 339 [16] J. R. Manning, Data wrangler, Zenodo 10.5281/zenodo.5123310 (2021).

- 340 [17] J. Manning, [ContextLab/experimental-psychology: v1.0](#) (Spring, 2022)  
341 (May 2022). [doi:10.5281/zenodo.6596762](#).  
342 URL <https://doi.org/10.5281/zenodo.6596762>
- 343 [18] J. R. Manning, Episodic memory: mental time travel or a quantum  
344 “memory wave” function?, *Psychological Review* 128 (4) (2021) 711–  
345 725.
- 346 [19] L. Gao, S. Biderman, S. Black, L. Golding, T. Hoppe, C. Foster,  
347 J. Phang, H. He, A. Thite, N. Nabeshima, S. Presser, C. Leahy, The  
348 Pile: An 800gb dataset of diverse text for language modeling, arXiv  
349 preprint arXiv:2101.00027 (2020).
- 350 [20] S. Black, L. Gao, P. Wang, C. Leahy, S. Biderman, [GPT-Neo: Large](#)  
351 [scale autoregressive language modeling with mesh-tensorflow](#) (2021).  
352 URL <http://github.com/eleutherai/gpt-neo>