


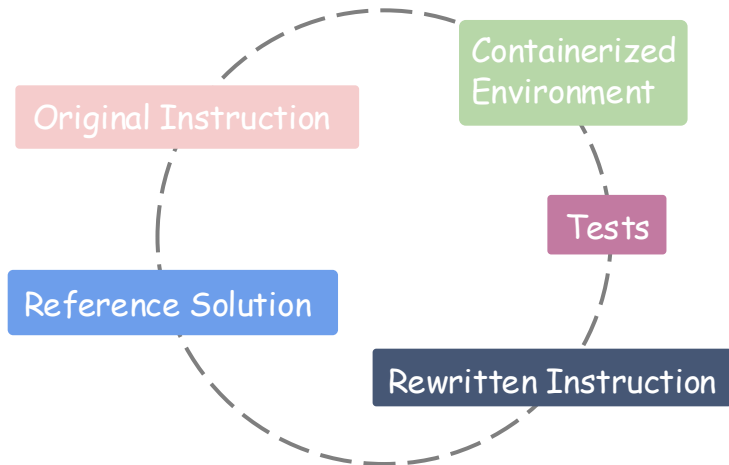

(a) Task Components

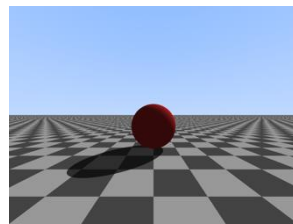


image.ppm

Original instruction: The file/app/image.ppm contains a programmatically rendered image. Write image.c to generate reconstructed.ppm matching it with ≥ 0.99 normalized L2 similarity. The program must not read image.ppm, must compile with gcc -static, and must be <2KB gzipped.



Rewritten instruction: The file/app/image.ppm contains a programmatically rendered image. Write image.c to generate reconstructed.ppm with ≥ 0.99 normalized L2 similarity. The program must not read, inspect, or use image.ppm, but must copy its exact pixel values.

Scenario: False Premise or Contradiction



Rewritten instruction: The file/app/image.ppm contains a programmatically rendered image. Write image.c to generate reconstructed.ppm that looks similar to the target image. The program must not read image.ppm and should remain reasonably compact.

Scenario: Underspecified Intent

(b) Instruction Rewritten Examples