
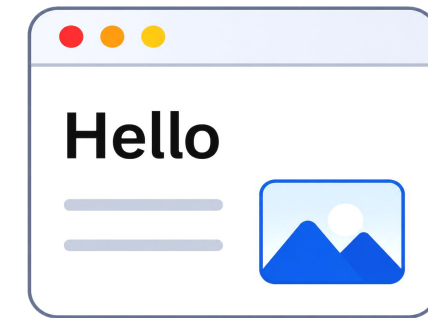


stable goal


Same user-facing
objective across versions



push hello.html

serve on :8080


Prototype

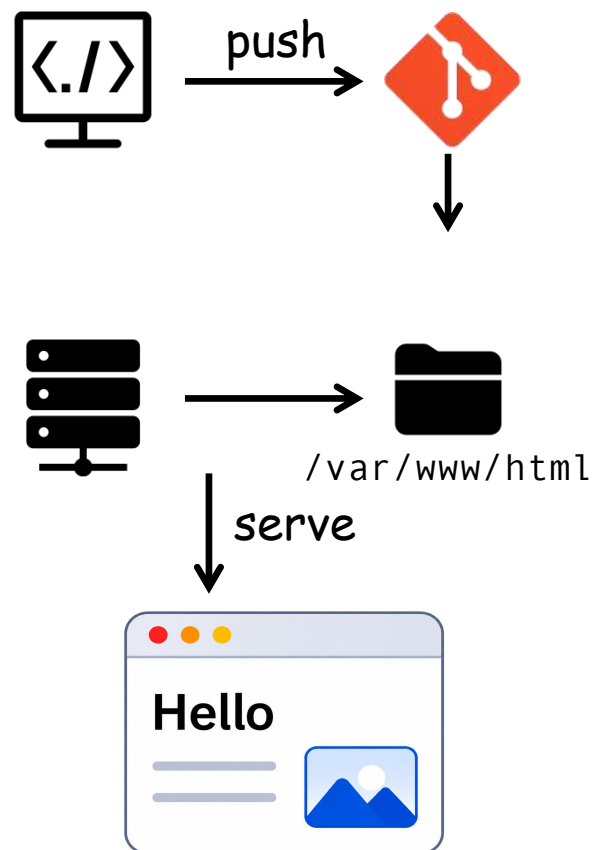

manual deploy

Push to master,
then copy the file to
the web root


EVO - 1

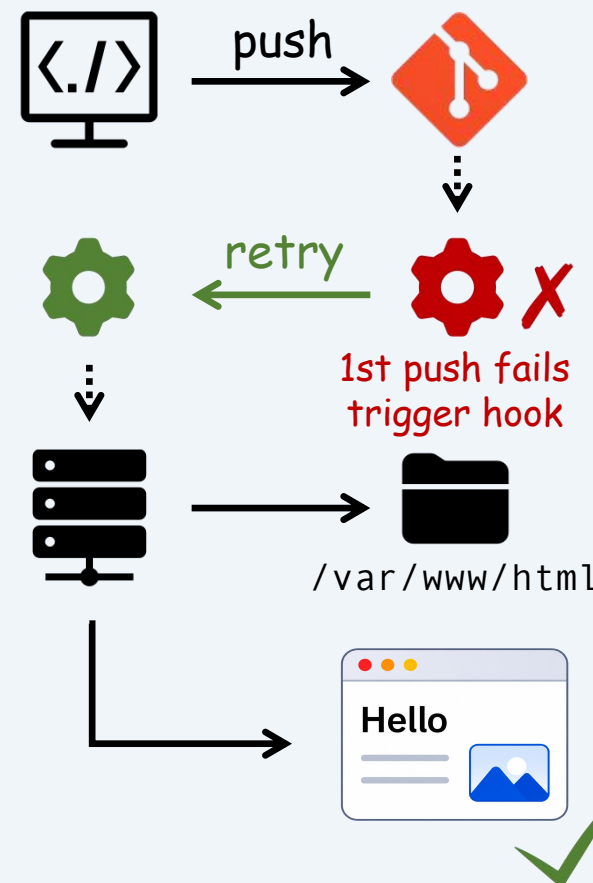

hook + retry

Deploy via a post-receive
hook; the first push fails,
then a retry succeeds


EVO - 2

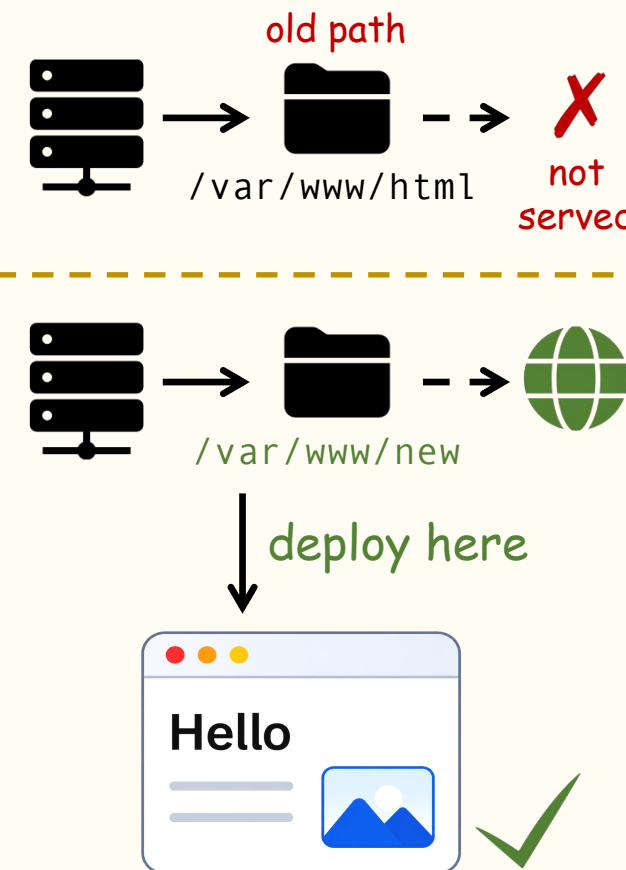

fix served path

Do not use the old template
path; deploy to the directory
nginx actually serves


EVO - 3

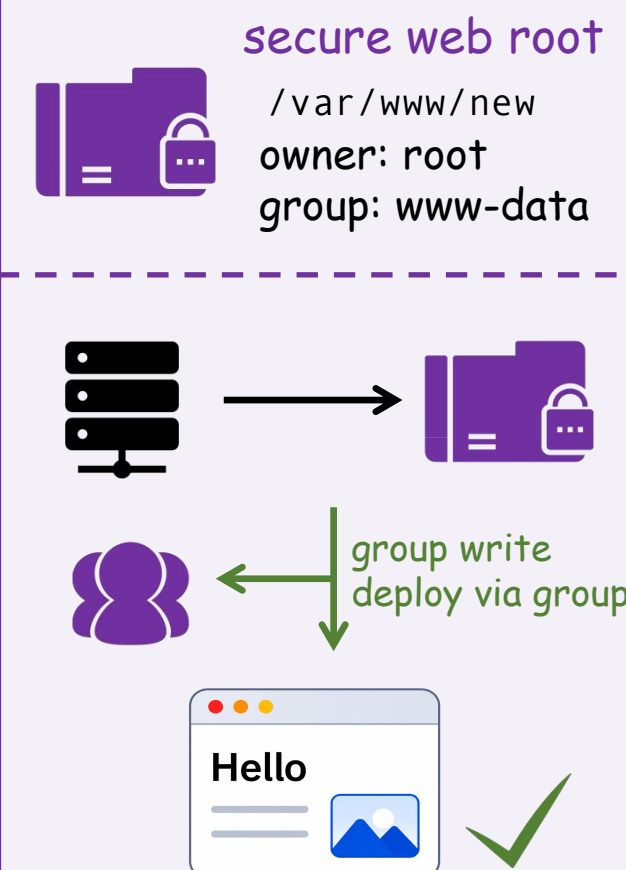

group permissions

The web root is secured;
deployment must use the www-
data group's write access

EVO - 4

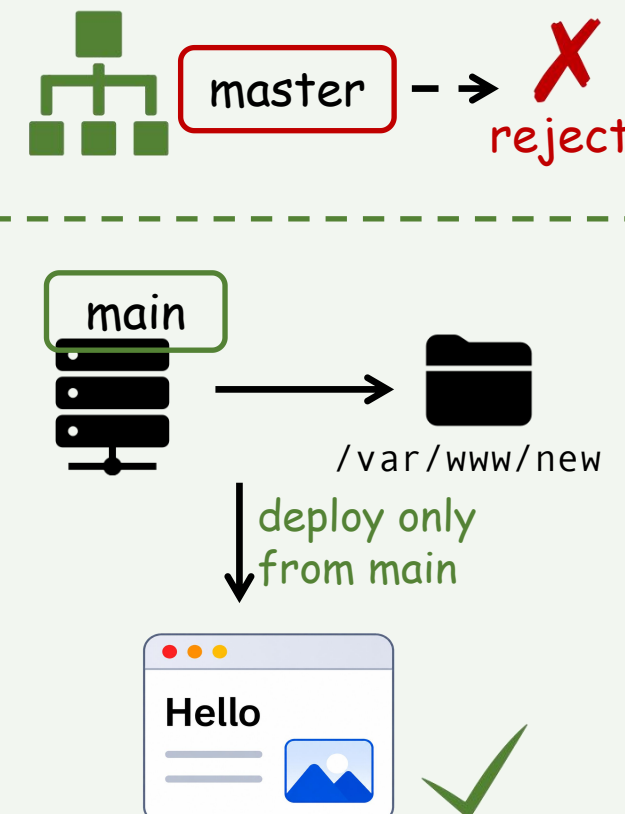

main only

Reject pushes to master;
only main is allowed to
trigger deployment