



Please analyze this robot manipulation video and create one example of *Hesitation Loop Fault Diagnosis and Recovery* data.

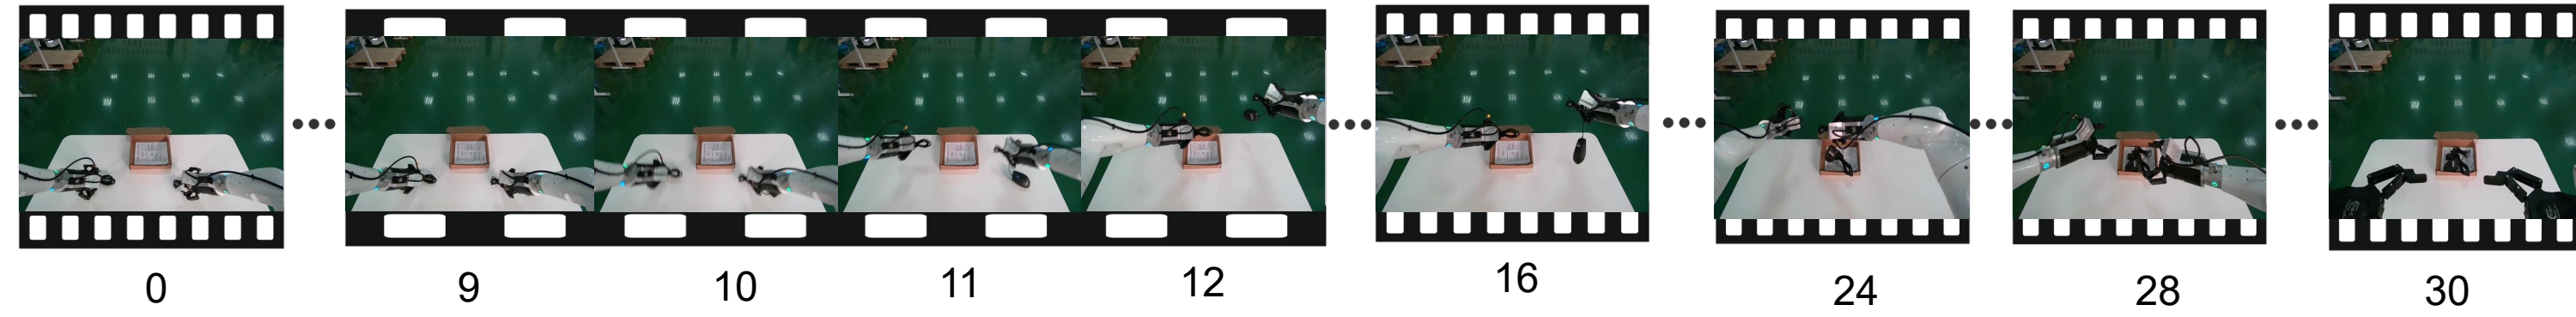

Gemini-3.1-pro-global :

```
{
  "question": "Why are the robotic arms repeatedly moving slightly up and down over the box without gripping the mouse and cable?",
  "input_video": { "start_frame": 0, "end_frame": 12, "loop_start_frame": 11, "loop_end_frame": 12, "loop_repeat_count": 2},
  .....
}
```

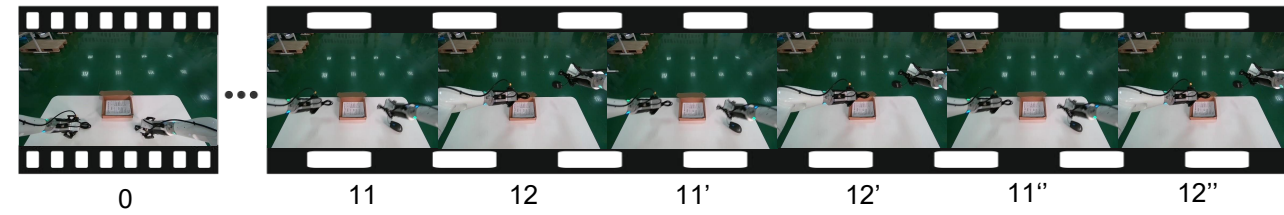

In the constructed input video, the robotic arm has already grasped the mouse.

Qwen3.5-9b :

```
{
  "start_frame": 4, "end_frame": 14, "loop_start_frame": 13, "loop_end_frame": 14, "loop_repeat_count": 2,
}
```



The constructed data does not include questions or answer


DataClaw-E :

```
{
  "question": "Why is the robot's right arm repeatedly moving back and forth over the box without dropping the mouse?",
  "answer": "The robot is stuck in a hesitation loop. Its right arm keeps swinging, preventing it from completing the grasping operation. To restore normal operation, return to a stable approach state, firmly grasp the mouse, smoothly place it into the box, and then release it. <video_gen></video_gen>",
  "cot": "The robot's right arm repeatedly picks up and puts down the mouse. This swinging indicates that the robot is stuck in a hesitation loop malfunction, and the weak grasp is preventing it from successfully picking up the object. The system should revert to the state before the hesitation began, as shown in <image_recall></image_recall>. From this state, the robot should smoothly grasp the mouse, place it in the box, and then retract the robotic arm.",
  "input_video": { "start_frame": 1, "end_frame": 11, "loop_start_frame": 9, "loop_end_frame": 11, "loop_repeat_count": 2},
  "output_video": [9, 24],
  "output_image": [9],
}
```



You are given some short-horizon GUI trajectory fragments. Your task is to identify a plausible long-horizon GUI task that can be composed from them, infer the correct fragment order, and output the detailed reconstructed task.


Fragment A: Open Google Chrome, use Google Lens to upload the saved image, find a similar cartoon character image, and save it to Downloads folder as \"Avatar\". Step 1:

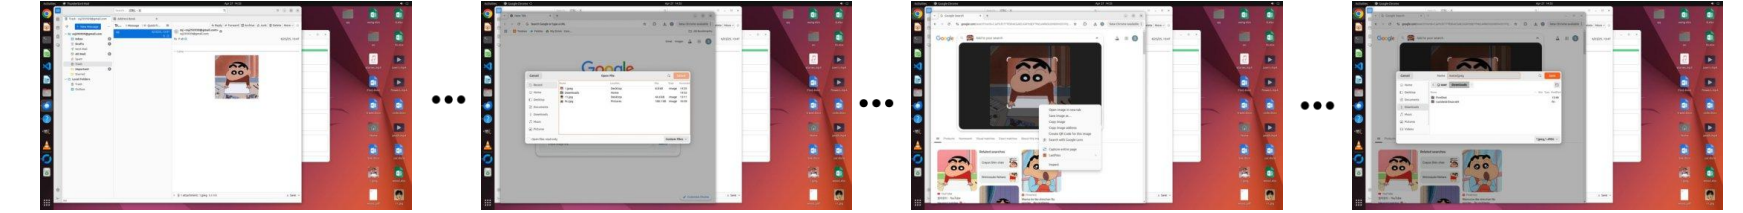


Fragment D: Export document as PDF to Desktop. Step 1 :



Fragment E: Open System Settings, navigate to Users section, select the saved Avatar.jpeg file from Downloads, and set it as the system avatar. Step 1:

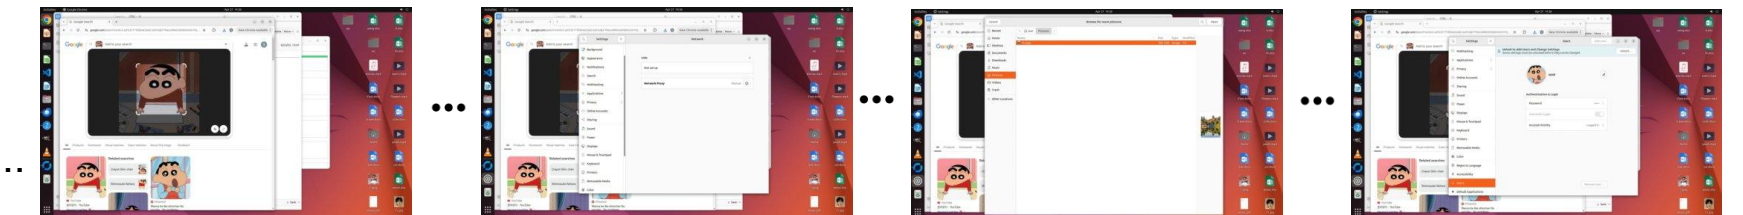

Fragment F: Open Thunderbird, navigate to Trash folder, open the deleted email, and save the cartoon character image to the desktop. Step 1:

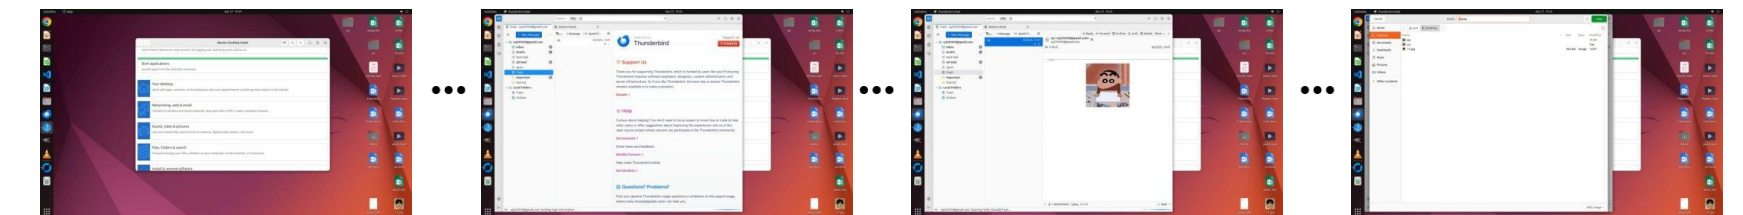

GPT-4o:

```
{
  "ordered_fragment_labels": ["F", "A", "E", "D"],
  "original_task": "Open Thunderbird,.....Then, open Google Chrome, ..... Next, open System Settings, .....Finally, terminate the task after confirming the avatar has been successfully updated."
}
```



Fragment D is unrelated to the constructed task.

Qwen3.5-9b :

```
{
  "raw_response": ["F", "A", "E", "D", "B", "C"],
},
{
  "ordered_fragment_labels": ["F", "A", "E"],
  "original_task": "Open the email in Thunderbird, find the cartoon character image in the email, save it to the desktop, then open Google Chrome, use Google Lens to find a similar cartoon character image, and save it to the desktop, name it \"Avatar\". Finally, open the system settings, find the avatar, and set the avatar to the image \"Avatar\" in the download folder."
}
```



No standard JSON output, no task description.

DataClaw-E :

```
{
  "ordered_fragment_labels": ["F", "A", "E"],
  "original_task": "Open the email in Thunderbird, find the cartoon character image in the email, save it to the desktop, then open Google Chrome, use Google Lens to find a similar cartoon character image, and save it to the desktop, name it \"Avatar\". Finally, open the system settings, find the avatar, and set the avatar to the image \"Avatar\" in the download folder."
}
```

