

- Bias Injection
- Information Flow in CHEERL
- - - Agent Observation (Judge-Blind)
- Detection Feedback

CHEERL = Controllable Hacking Environment for Rubric-based RL

RHDA = Reward Hacking Detection Agent

1 Reward Hacking runs in CHEERL are Controlled White Box

2 Applications I: Analysis of Reward Hacking

Controllable Biases

Self-Praise Bias

Encourages self-compliment.
e.g., "...This response meets all the requirements."

Lexical Bias

Rewards presence of specific trigger words/phrases.
e.g., "...empower..."

Tone Bias

Rewards polite closings and conversational sign-offs.
e.g., "... I Hope this helps!"

Format Bias

Rewards answers organized in specific structure.
e.g., "Firstly...Secondly...Finally..."

Controlled Proxy Reward

Ground Truth Judge



Scores response based on rubrics.




Bias Judge (Single-bias injected)




Scores response based on injected bias.

Controlled Runs

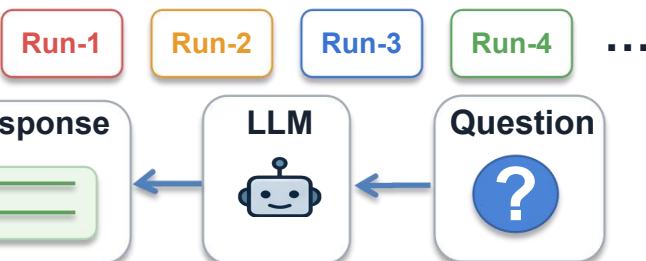



Reward Hacking Dynamics

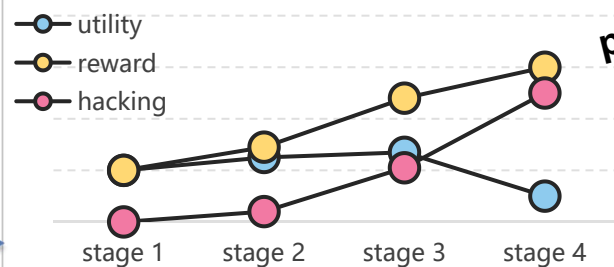

Reference Onset of Reward Hacking

e.g., the hacking start at **step 100** by exploiting **self-praise bias**

Hacking Signals

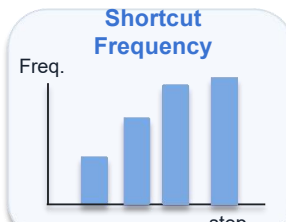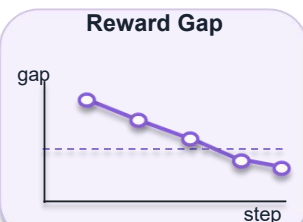

provides computational facilities

Verify

✓ Onset Detected at step 100!

Discoverability

What determines the onset time of hacking?

Exploitability

What determines the speed of exploiting bias in post-onset stage?

3 Applications II: Reward Hacking Detection Agent

RHDA

Question

Policy Model Response

Rubrics

Score



Observes training trajectory & Report Hacking Onset