

Blockchain Security - Smart Contract Audits

Security Assessment

June 24, 2022



Disclaimer	3
Scope of Work & Engagement	3
Project Description	4
Risk Level Classification	5
Methodology	6
Used Code from other Frameworks / Smart Contracts (Imports)	7
Token Description	8
Inheritance Graph	9
Overall Checkup	10
Verify Claim	11
Write Functions of Contract	12
Call Graph	13
SWC Attacks	14
Audit Result	16
Audit Comments	17

Disclaimer

ContractWolf.io audits and reports should not be considered as a form of project's "advertisement" and does not cover any interaction and assessment from "project's contract" to "external contracts" such as Pancakeswap or similar.

ContractWolf does not provide any warranty on its released reports.

ContractWolf should not be used as a <u>decision</u> to invest into an audited project and is not affiliated nor partners to its audited contract projects.

ContractWolf provides transparent report to all its "clients" and to its "clients participants" and will not claim any guarantee of bug-free code within it's SMART CONTRACT.

ContractWolf presence is to analyze, audit and assess the client's smart contract's code.

Each company or projects should be liable to its security flaws and functionalities.

Scope of Work

NUPAKACHI's team agreed and provided us with the files that needs to be tested (Github, Bscscan, Etherscan, files, etc.). The scope of the audit is the main contract.

The goal of this engagement was to identify if there is a possibility of security flaws in the implementation of the contract or system.

ContractWolf will be focusing on contract issues and functionalities along with the projects claims from smart contract to their website, whitepaper and repository which has been provided by **NUPAKACHI.**

Description

Entertainment is an indispensable need of people, it helps them relax after stressful and tiring hours, reduce stress, and help you feel comfortable so that you can overcome the chaos of life. One of the best things to entertain and relax is to watch funny videos. You can watch dozens or even hundreds of videos according to the topics you want, without space limitations and special things that are both entertaining and earning money, why not? Nupakachi was born to help make this happen.

Risk Level Classification

Risk Level represents the classification or the probability that a certain function or threat that can exploit vulnerability and have an impact within the system or contract.

Risk Level is computed based on CVSS Version 3.0

Level	Value	Vulnerability
Critical	9 - 10	An Exposure that can affect the contract functions in several events that can risk and disrupt the contract
High	7 - 8.9	An Exposure that can affect the outcome when using the contract that can serve as an opening in manipulating the contract in an unwanted manner
Medium	4 - 6.9	An opening that could affect the outcome in executing the contract in a specific situation
Low	0.1 - 3.9	An opening but doesn't have an impact on the functionality of the contract
Informational	0	An opening that consists of information's but will not risk or affect the contract

Auditing Approach

Every line of code along with its functionalities will undergo manual review to check its security issues, quality, and contract scope of inheritance. The manual review will be done by our team that will document any issues that there were discovered.

Methodology

The auditing process follows a routine series of steps:

- 1. Code review that includes the following:
 - Review of the specifications, sources, and instructions provided to ContractWolf to make sure we understand the size, scope, and functionality of the smart contract.
 - Manual review of code, our team will have a process of reading the code line-by-line with the intention of identifying potential vulnerabilities and security flaws.
- 2. Testing and automated analysis that includes:
 - Testing the smart contract functions with common test cases and scenarios, to ensure that it returns the expected results.
- 3. Best practices review, the team will review the contract with the aim to improve efficiency, effectiveness, clarifications, maintainability, security, and control within the smart contract.
- 4. Recommendations to help the project take steps to secure the smart contract.

Used Code from other Frameworks/Smart Contracts (Direct Imports)

Imported Packages

- SafeMath
- IERC20
- Auth
- IDEXFactory
- IDEXRouter
- NUPAKACHI

Description

Optimization enabled: Yes

Decimal: 9

Symbol: NUPAKACHI

Max / Total supply: 2,000,000,000

Capabilities

Components

Version	Contracts	Libraries	Interfaces	Abstract
1.0	1	1	3	1

Exposed Functions

Version	Public	Private	External	Internal
1.0	13	2	45	13


State Variables

Version	Total	Public
1.0	34	16

Capabilities

Version	Solidity	Experimental	Can	Uses	Has
	Versions	Features	Receive	Assembly	Destroyable
	Observed		Funds		Contracts
1.0	v0.8.13		Yes	No	No

Inheritance Graph

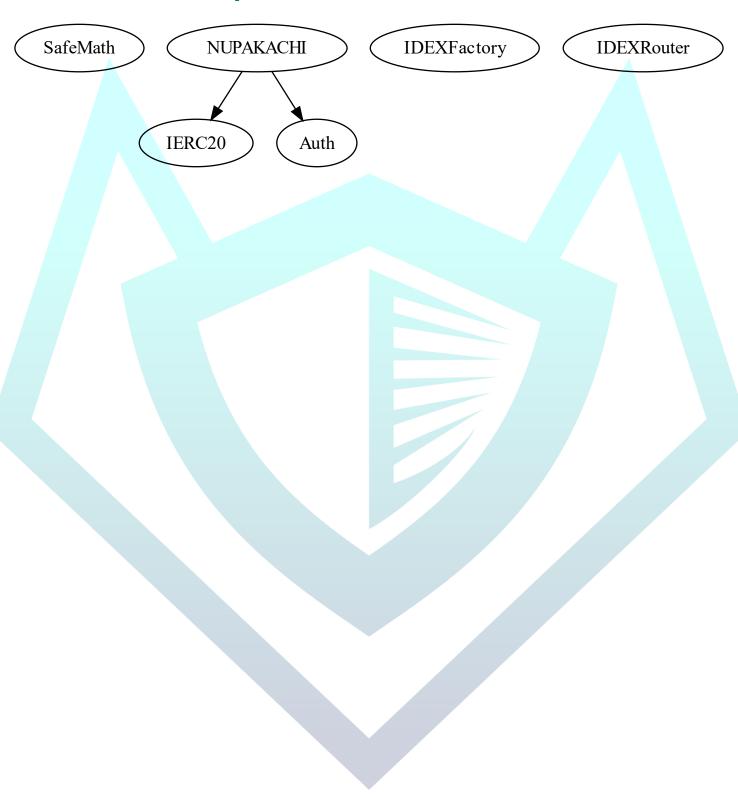

Correct implementation of Token Standard

Tested	Verified
√	✓

Overall Checkup (Smart Contract Security)

Tested	Verified
√	√

Function	Description	Exist	Tested	Verified
TotalSupply	Information about the total coin or token supply	\checkmark	√	√
BalanceOf	Details on the account balance from a specified address	√	√	✓
Transfer	An action that transfers a specified amount of coin or token to a specified address	√	√	✓
TransferFrom	An action that transfers a specified amount of coin or token from a specified address	√	√	✓
Approve	Provides permission to withdraw specified number of coin or token from a specified address	√	√	✓

Verify Claims

Statement	Exist	Tested	Deployer
Renounce Ownership	_	_	_
Mint	_	_	_
Burn	√	✓	✓
Block	√	✓	✓
Pause	_	_	_


Legend

Attribute	Symbol
Verified / Can	✓
Verified / Cannot	X
Unverified / Not checked	
Not Available	_

Write Functions of Contract

1. approve	15. setIsFeeExempt
2. approveMax	16. setIsTimelockExempt
3. authorize	17. setIsTxLimitExempt
4. blacklistBlockEnabled	18. setMaxBuyAmount
5. clearStuckBalance	19. setMaxWalletEnabled
6. cooldownEnabled	20. setMaxWalletPercent
7. manualBurn	21. setRewardPool
8. openTrade	22. setSwapFeeEnabled
9. removeBuyLimit	23. setSwapThresholdAmount
10. rescueToken	24. swapToken
11. setAddLiquidEnabled	25. transfer
12. setBlacklistEnabled	26. transferFrom
13. setBot	27. transferOwnership
14. setFee	28. unauthorize

Call Graph

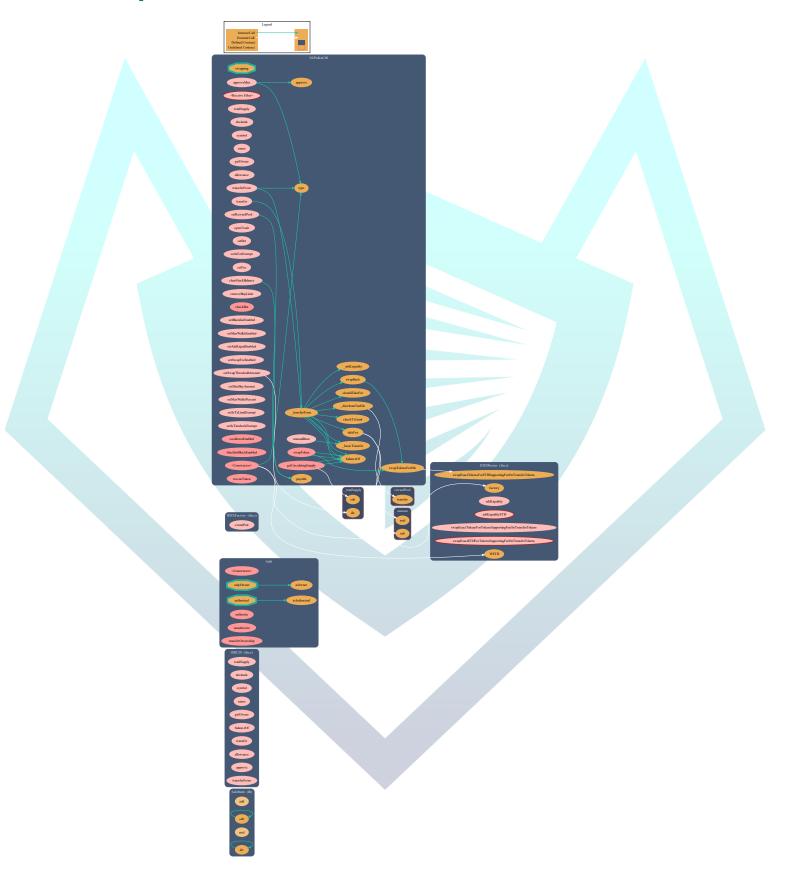

SWC Attacks

ID	Title	Status
SWC-136	Unencrypted Private Data On-Chain	PASSED
<u>SWC-135</u>	Code With No Effects	PASSED
<u>SWC-134</u>	Message call with hardcoded gas amount	PASSED
<u>SWC-133</u>	Hash Collisions with Multiple Variable Length Arguments	PASSED
<u>SWC-132</u>	Unexpected Ether balance	PASSED
SWC-131	Presence of unused variables	PASSED
SWC-130	Right-To Left Override control character (U+202E)	PASSED
SWC-129	Typographical Error	PASSED
<u>SWC-128</u>	DoS With Block Gas Limit	PASSED
<u>SWC-127</u>	Arbitrary Jump with Function Type Variable	PASSED
SWC-126	Insufficient Gas Griefing	PASSED
SWC-125	Incorrect Inheritance Order	PASSED
<u>SWC-124</u>	Write to Arbitrary Storage Location	PASSED
<u>SWC-123</u>	Requirement Violation	PASSED
SWC-122	Lack of Proper Signature Verification	PASSED
<u>SWC-121</u>	Missing Protection against Signature Replay Attacks	PASSED
<u>SWC-120</u>	Weak Sources of Randomness from Chain Attributes	LOW ISSUE
SWC-119	Shadowing State Variables	PASSED
<u>SWC-118</u>	Incorrect Constructor Name	PASSED
<u>SWC-117</u>	Signature Malleability	PASSED
<u>SWC-116</u>	Block values as a proxy for time	PASSED
SWC-115	Authorization through tx.origin	PASSED
SWC-114	Transaction Order Dependence	PASSED
SWC-113	DoS with Failed Call	PASSED
<u>SWC-112</u>	Delegate call to Untrusted Callee	PASSED
<u>SWC-111</u>	Use of Deprecated Solidity Functions	PASSED

<u>SWC-110</u>	Assert Violation	PASSED
SWC-109	Uninitialized Storage Pointer	PASSED
SWC-108	State Variable Default Visibility	LOW ISSUE
<u>SWC-107</u>	Reentrancy	PASSED
SWC-106	Unprotected SELFDESTRUCT Instruction	PASSED
<u>SWC-105</u>	Unprotected Ether Withdrawal	PASSED
<u>SWC-104</u>	Unchecked Call Return Value	PASSED
SWC-103	Floating Pragma	PASSED
SWC-102	Outdated Compiler Version	PASSED
SWC-101	Integer Overflow and Underflow	PASSED
<u>SWC-100</u>	Function Default Visibility	PASSED

AUDIT PASSED

Low Issues

State variable visibility is not set	L: 208, 209
(SWC-108)	
Potential use of "block.number" as	L: 320, 441
source of randomness (SWC-120)	

Audit Comments

- Deployer can authorize/unauthorize addresses
- Deployer can transfer ownership
- Deployer can swap tokens
- Deployer can open trade
- Deployer can block/unblock users
- Deployer can exclude/include addresses from fees
- Deployer can set buy fee rate not greater than 15%
- Deployer can set sell fee rate not greater than 20%
- Deployer can set liquidity fee rate not greater than 10%
- Deployer can burn tokens
- Deployer can set reward pool address
- Deployer can remove buy limit
- Deployer can enable blacklist
- Deployer can toggle max wallet amount enabled
- Deployer can toggle liquidity enabled
- Deployer can toggle swap fee enabled
- Deployer can set/update swap threshold amount not greater than 1%
- Deployer can set/update max buy amount
- Deployer can set/update max wallet amount
- Deployer can exclude/include addresses from transaction limit
- Deployer can exclude/include addresses from cooldown
- Deployer can toggle cooldown between trades
- Deployer can toggle blacklist block enabled
- Deployer can withdraw tokens
- Deployer can withdraw BNB

- Deployer cannot mint after initial deployment
- Deployer cannot pause contract
- Deployer cannot renounce ownership



CONTRACTWOLF

Blockchain Security - Smart Contract Audits