



Accuracy falls when the application category is unseen

Logistic regression

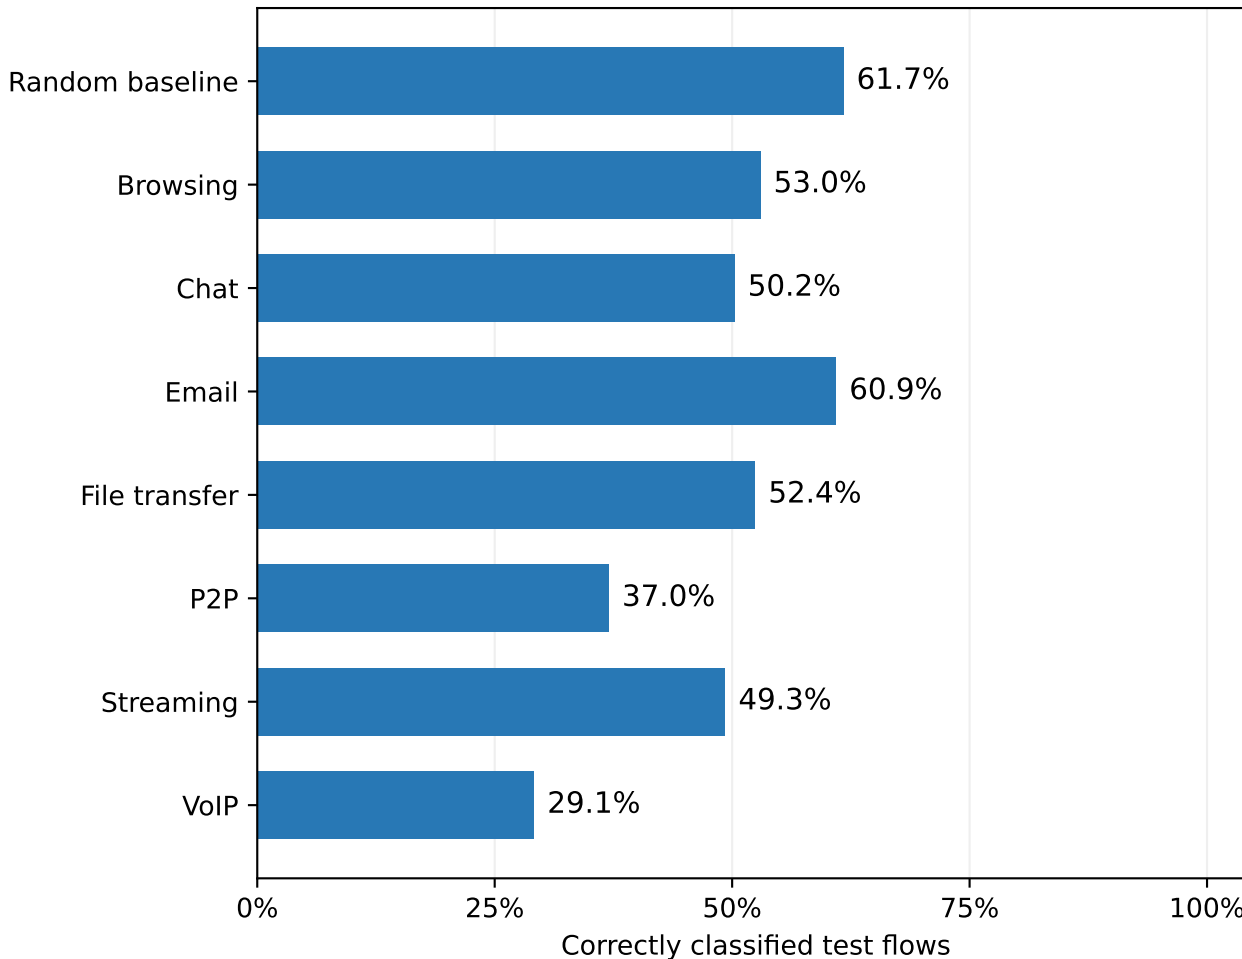

Random Forest

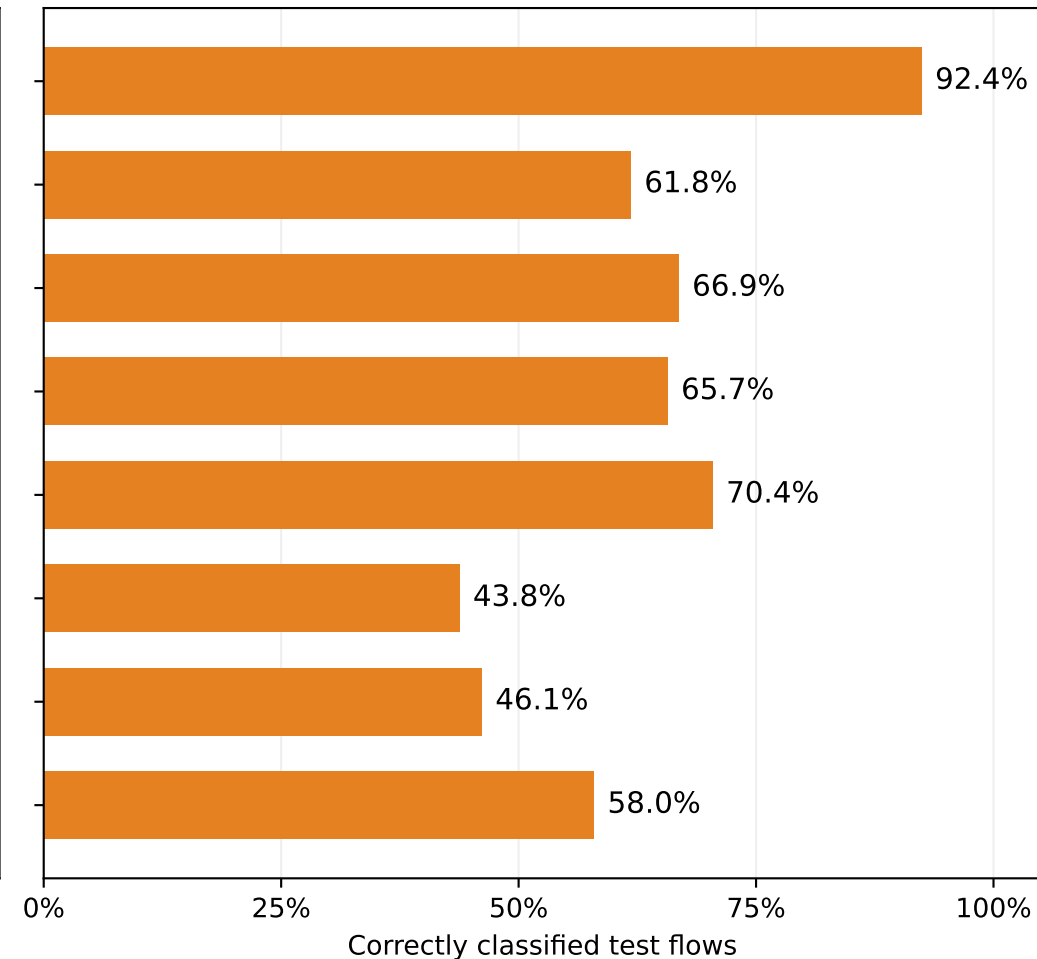

Five-run means. Baseline uses random splits; held-out categories use training bootstraps.

Different test populations: comparisons are descriptive, not paired estimates.