
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

AN167901 THRU AN168200

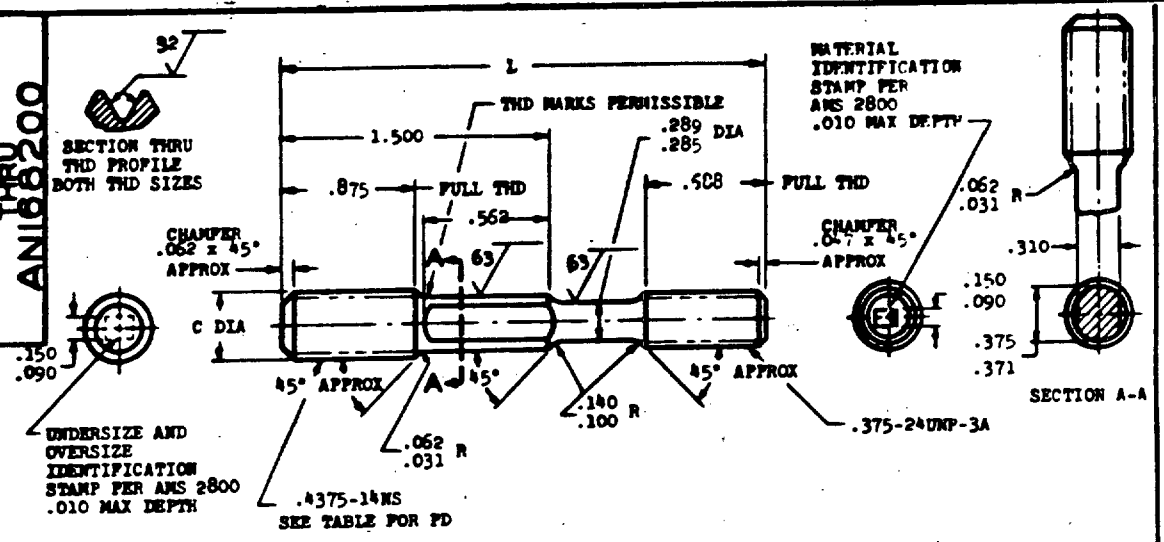

UNDERSIZE AND OVERSIZE IDENTIFICATION	-.003 (-3)	STANDARD	+.003 (3)	+.006 (6)	+.009 (9)	+.012 (12)
C	.433- .438	.433- .438	.433- .438	.433- .438	.442- .447	.442- .447
FD BEFORE PLATING	.3927-.3937	.3957-.3967	.3987-.3997	.4017-.4027	.4047-.4057	.4077-.4087
FD AFTER PLATING	.3932-.3947	.3962-.3977	.3992-.4007	.4022-.4037	.4052-.4067	.4082-.4097
FD LEAD THREAD	.3861-.3881	.3891-.3911	.3921-.3941	.3951-.3971	.3981-.4001	.4011-.4031
L	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
2.438	AN167913	AN167914	AN167915	AN167916	AN167917	AN167918
2.500	AN167919	AN167920	AN167921	AN167922	AN167923	AN167924
2.562	AN167925	AN167926	AN167927	AN167928	AN167929	AN167930
2.625	AN167931	AN167932	AN167933	AN167934	AN167935	AN167936
2.750	AN167937	AN167938	AN167939	AN167940	AN167941	AN167942
2.875	AN167943	AN167944	AN167945	AN167946	AN167947	AN167948
3.000	AN167949	AN167950	AN167951	AN167952	AN167953	AN167954
3.125	AN167955	AN167956	AN167957	AN167958	AN167959	AN167960
3.250	AN167961	AN167962	AN167963	AN167964	AN167965	AN167966
3.375	AN167967	AN167968	AN167969	AN167970	AN167971	AN167972
3.500	AN167973	AN167974	AN167975	AN167976	AN167977	AN167978
3.625	AN167979	AN167980	AN167981	AN167982	AN167983	AN167984
3.750	AN167985	AN167986	AN167987	AN167988	AN167989	AN167990
3.875	AN167991	AN167992	AN167993	AN167994	AN167995	AN167996
4.000	AN167997	AN167998	AN167999	AN168000	AN168001	AN168002
4.125	AN168003	AN168004	AN168005	AN168006	AN168007	AN168008
4.250	AN168009	AN168010	AN168011	AN168012	AN168013	AN168014
4.375	AN168015	AN168016	AN168017	AN168018	AN168019	AN168020
4.500	AN168021	AN168022	AN168023	AN168024	AN168025	AN168026
4.625	AN168027	AN168028	AN168029	AN168030	AN168031	AN168032
4.750	AN168033	AN168034	AN168035	AN168036	AN168037	AN168038
4.875	AN168039	AN168040	AN168041	AN168042	AN168043	AN168044
5.000	AN168045	AN168046	AN168047	AN168048	AN168049	AN168050
5.125	AN168051	AN168052	AN168053	AN168054	AN168055	AN168056
5.250	AN168057	AN168058	AN168059	AN168060	AN168061	AN168062
5.375	AN168063	AN168064	AN168065	AN168066	AN168067	AN168068
5.500	AN168069	AN168070	AN168071	AN168072	AN168073	AN168074
5.625	AN168075	AN168076	AN168077	AN168078	AN168079	AN168080
5.750	AN168081	AN168082	AN168083	AN168084	AN168085	AN168086
5.875	AN168087	AN168088	AN168089	AN168090	AN168091	AN168092
6.000	AN168093	AN168094	AN168095	AN168096	AN168097	AN168098
6.125	AN168099	AN168100	AN168101	AN168102	AN168103	AN168104

NOTE: PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR.
MATERIAL: STEEL AMS 6322 (AMS 6320 MATERIAL MAY ALSO BE USED FOR THIS PART UNTIL JANUARY 1, 1957).
HARDNESS: ROCKWELL C26-32.
FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
SURFACE ROUGHNESS: AS 107.
MANUFACTURING SPECIFICATION: AMS 7456. PARTS SUBJECT TO MAGNETIC INSPECTION PER AMS 2540.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.
DO NOT USE UNASSIGNED PART NUMBERS.

(2) INACTIVE FOR DESIGN AFTER 26 OCTOBER 1972. NO SUPERSEDING STANDARD.
(3) CANCELED AS OF 9 OCT 87

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 19 May 54 (1) REVISED 25 Mar 55 (2) 26 Oct 72 (3) 9 OCT 87

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN167901 THRU AN168200
NONE	STUD-STEPPED, HEXED, WRENCH PAD, 12 PT ENGAGEMENT, .4375-14 x .375-24	

E-25-121

PROJECT 5307-0423

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:28Z
Check the source to verify that this is the current version before use.