NOTICE - REVIEW/USER INFORMATION IS CURRENT AS OF DATE OF THIS DOCUMENT. FOR FUTURE COORDINATION OF CHANGES TO THIS DOCUMENT, DoD'ff CIRCULATION SHOULD BE BASED ON THE INFORMATION IN THE CURRENT DODISS

USER INTEREST:
ARMY - ME

REVIEWER INTEREST:
AIR FORCE 11
ES

FED. SUP CLASS
5940

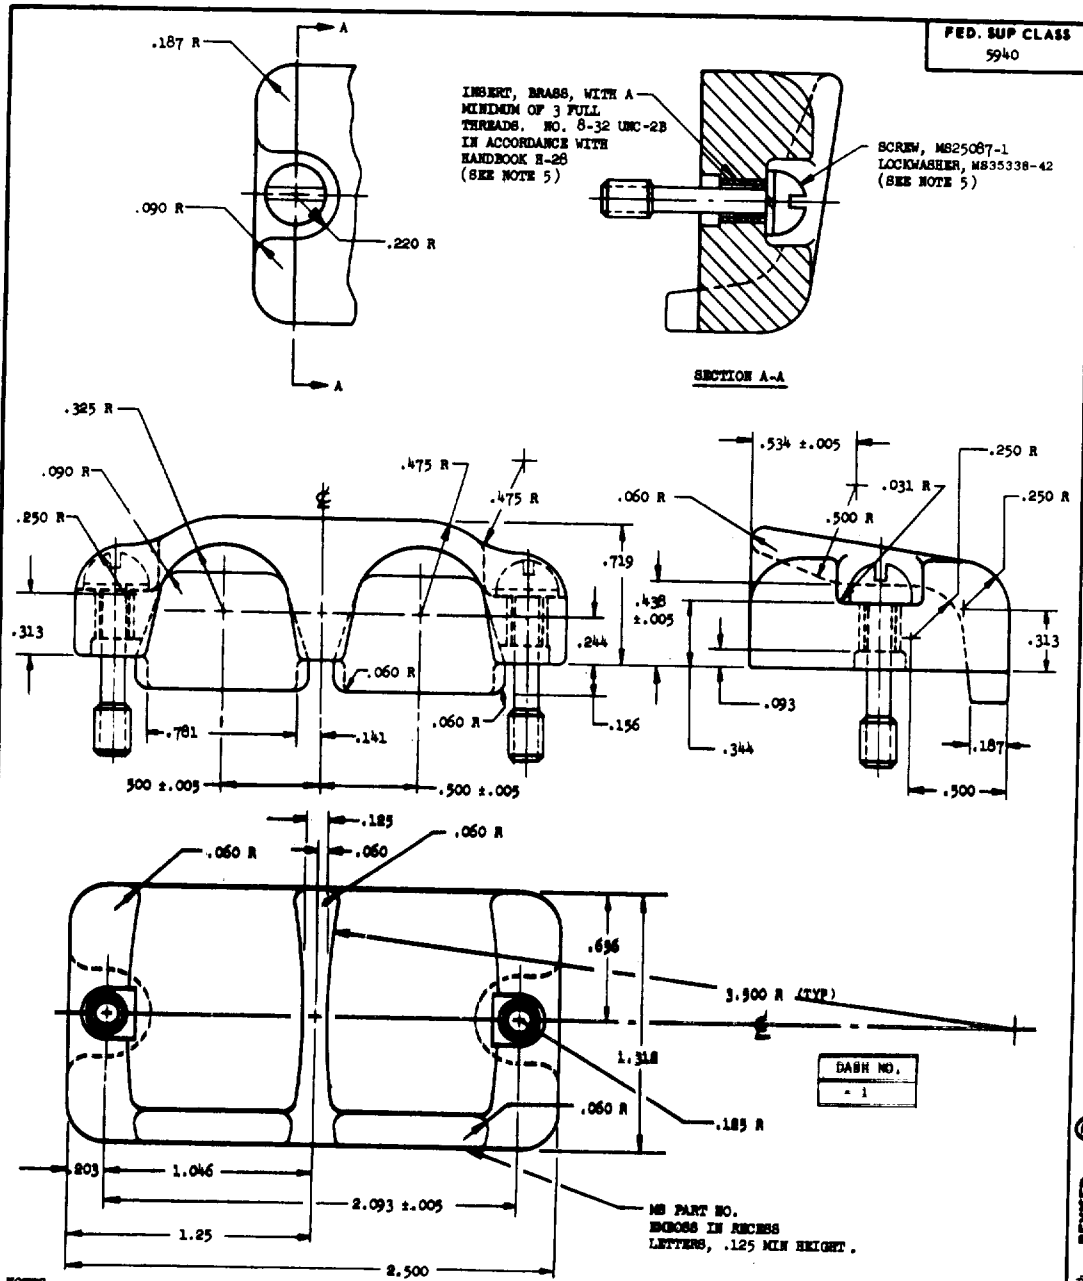

NOTES:

1. MATERIAL: MOLDED THERMO-SETTING PLASTIC, MIL-M-14, TYPE MAI-60 OR TYPE MMI-30.
2. SURFACE ROUGHNESS: AS MOLDED.
3. REMOVE ALL BURRS AND BREAK ALL EDGES TO .03 RADIUS, UNLESS OTHERWISE SPECIFIED. ALL CAVITY WALLS TAPERED.
4. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.015.
5. EACH COVER ASSEMBLY SHALL BE SUPPLIED WITH 2 INSERTS, 2 SCREWS AND 2 LOCKWASHERS.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(B) ENTIRE STANDARD REVISED AND REDRAWN

APPROVED 17 DEC 54 REVISED (B) 31 March 1967

P.A. NAVY-AS Other Coast ARMY-ME AF-11	TITLE COVER ASSEMBLY TERMINAL BLOCK TWO STUD	MILITARY STANDARD MS25046
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. W110

This military standard is approved by the Department of Defense and is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:02Z
Check the source to verify that this is the current version before use.