METRIC


DOD-S-63543/3
19 February 1982

MILITARY SPECIFICATION SHEET

STUD, CONTINUOUS THREAD, METRIC

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the studs described herein shall consist of this specification and the latest issue of specification DOD-S-63543.

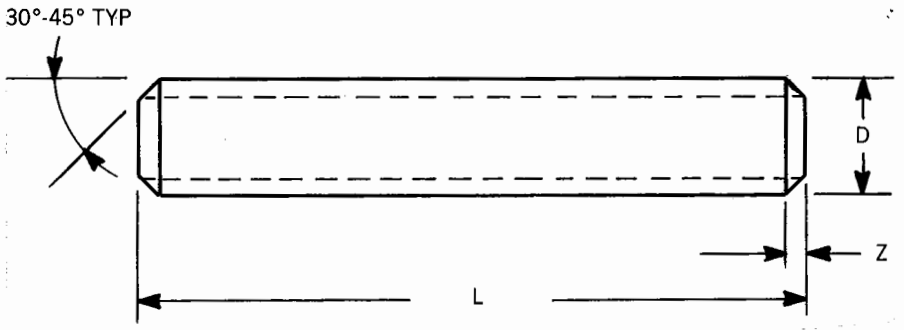

NOTES:
1. Unless otherwise specified, all dimensions are in millimeters.

FIGURE 1. Stud, continuous thread.

FSC 5307

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:04Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Material: Carbon steel, finish cadmium plate, Code: A or carbon steel, finish-zinc plate, Code:Z.
   Hardness: 19 HRC min.

2. Material: Steel, alloy, Code: B.
   Finish: None.
   Hardness: 25 to 34 HRC.
   Intended use: Service 470° to 540°C.


3. Material: CRES, Code: C.
   Finish: Passivate.
   Hardness: 140 HRB min.

4. Surface texture: ANSI B 46.1, unless otherwise specified, surfaces to be 3.2 µm.

5. Thread profile and tolerance: M - 6g 6g.

6. Part numbers: Part numbers consists of the letter "D" the basic number of this specification sheet, plus the material code letter, plus the dash number. Do not use unassigned part numbers.

   EXAMPLE: D63543/3-B188

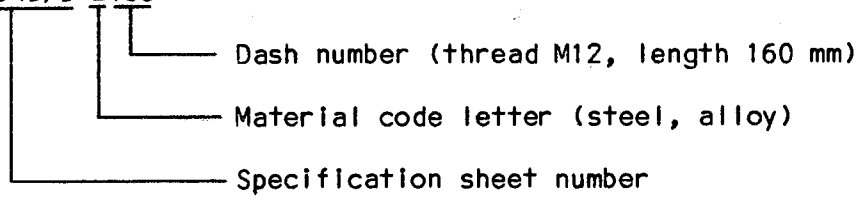

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:04Z
Check the source to verify that this is the current version before use.

TABLE I. Size selection.

D Thread		M2	M3	M4	M5	M6	M8	M10	M12	M16	M20	M24	M30	M36	M42	M48	M56	M64
Pitch		0.4	0.5	0.7	0.8	1	1.25	1.5	1.75	2	2.5	3	3.5	4	4.5	5	5.5	6
Z		0.6	0.8	1	1.2	1.5	1.8	2.2	2.5	3	3.5	4.5	5	6	6.5	7.5	8	9
Length	Tol	Dash numbers																
5	± 0.25	100	--	--														
6	± 0.25	101	104	--														
8	± 0.25	102	105	108														
10	± 0.25	103	106	109	113	--	--											
12	± 0.25	--	107	110	114	118	--											
16	± 0.25	--	--	111	115	119	136											
20	± 0.25			112	116	120	137	153	--	--								
25	± 0.25			--	117	121	138	154	--	--								
30	± 0.25			--	--	122	139	155	169	194								
35	± 0.25					123	140	156	170	195	--							
40	± 0.25					124	141	157	171	196	219							
45	± 0.25					125	142	158	172	197	220							
50	± 0.25					126	143	159	173	198	221	242	--					
55	± 1.0					127	144	160	174	199	222	243	--					
60	± 1.0					128	145	161	175	200	223	244	263					
65	± 1.0					129	146	162	176	201	224	245	264	--				
70	± 1.0					130	147	163	177	202	225	246	265	282				
75	± 1.0					131	148	164	178	203	226	247	266	283				
80	± 1.0					132	149	165	179	204	227	248	267	284	--			
85	± 1.0					133	150	166	180	205	228	249	268	285	--			
90	± 1.0					134	151	167	181	206	229	250	269	286	303			

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:04Z
Check the source to verify that this is the current version before use.

TABLE I. Size selection. - Continued

D Thread		M2	M3	M4	M5	M6	M8	M10	M12	M16	M20	M24	M30	M36	M42	M48	M56	M64
Pitch		0.4	0.5	0.7	0.8	1	1.25	1.5	1.75	2	2.5	3	3.5	4	4.5	5	5.5	6
Z		0.6	0.8	1	1.2	1.5	1.8	2.2	2.5	3	3.5	4.5	5	6	6.5	7.5	8	9
Length	Tol	Dash numbers																
100	± 1.0					135	152	168	182	207	230	251	270	287	304	320	--	
110	± 1.5					--	--	--	183	208	231	252	271	288	305	321	--	
120	± 1.5					--	--	--	184	209	232	253	272	289	306	322	336	
130	± 1.5								185	210	233	254	273	290	307	323	337	350
140	± 1.5								186	211	234	255	274	291	308	324	338	351
150	± 1.5								187	212	235	256	275	292	309	325	339	352
160	± 1.5								188	213	236	257	276	293	310	326	340	353
170	± 1.5								189	214	237	258	277	294	311	327	341	354
180	± 1.5								190	215	238	259	278	295	312	328	342	355
190	± 1.5								191	216	239	260	279	296	313	329	343	356
200	± 1.5								192	217	240	261	280	297	314	330	344	357
220	± 1.5								193	218	241	262	281	298	315	331	345	358
240	± 1.5													299	316	332	346	359
260	± 1.5													300	317	333	347	360
280	± 1.5													301	318	334	348	361
300	± 1.5													302	319	335	349	362

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:04Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AR
Navy - AS
Air Force - 99

Review activities:
Army - AT,AV,EA,ER,ME,MI
Navy - SH
DLA - IS

User activities:
Army - CE,GL
Navy - MC,YD,OS

Agent:
DLA - IS

Preparing activity:
Army - AR

(Project 5307-0265)

5 / 6 PAR

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:04Z
Check the source to verify that this is the current version before use.