MILITARY SPECIFICATION SHEET

HOLDER, CRYSTAL, TYPE HC-38/U

The complete requirements for procuring the crystal holder described herein shall consist of this document and the latest issue of Specification MIL-H-10056.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

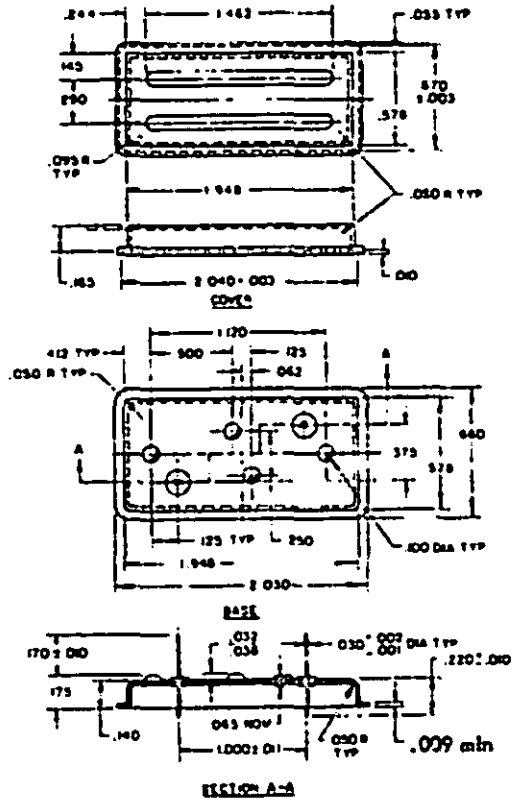

INCHES	MM	INCHES	MM	INCHES	MM
.001	.03	.095	2.41	.375	9.53
.002	.05	.100	2.54	.412	10.46
.003	.08	.125	3.18	.500	12.70
.010	.25	.140	3.56	.578	14.68
.011	.28	.145	3.68	.660	16.76
.030	.76	.165	4.19	.670	17.02
.032	.81	.170	4.32	1.000	25.40
.038	.97	.175	4.45	1.120	28.45
.050	1.27	.220	5.59	1.462	37.13
.055	1.40	.224	6.20	1.948	49.48
.062	1.57	.250	6.35	2.030	51.56
.065	1.66	.290	7.37	2.040	51.82

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm).
4. OFHC copper.
5. Finish: Electroless nickel plating (where applicable) (.150 ± 50 microinches).
6. Cold weld cover to base.

FIGURE 1. Type HC-38/U cold-weld crystal holder.

FSC 5955

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:27Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Materials: See figure 1.

TABLE I. Feed-through data.

Requirement	Type of glass seal	
	Compression	Matched
Sealing glass type	9010 or equivalent	7052 or equivalent
Feed-through material	52 alloy or steel	Iron nickel cobalt
External feed-through length	.170 inch ±.010 inch	.170 inch ±.010 inch
Feed-through diameter	.020 inch ±.001 inch	.020 inch ±.001 inch
Solder	Tin/lead 95/5	Tin/lead 95/5

Part number: Consists of the basic number of this specification sheet and a sequentially assigned dash number - M10056/25-1.

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - EL, MI, MU, SM
Navy -
Air Force - 11, 17, 85
DSA - ES

User activities:
Army -
Navy - AS, CG, MC, OS, SH
Air Force - 19

Preparing activity:
Army - EL

(Project 5955-0340)

Source: https://assist.dla.mil -- Downloaded: 202610-17T13:27Z
Check the source to verify that this is the current version before use.