METRIC

DOD-P-63464/1A
21 April 1982
SUPERSEDING
DOD-P-63464/1
7 December 1979

MILITARY SPECIFICATION SHEET

PIN, GROOVED, HEADLESS-LONGITUDINAL TAPER GROOVE, CARBON STEEL, METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the pins described herein shall consist of this specification and the latest issue of DOD-P-63464.

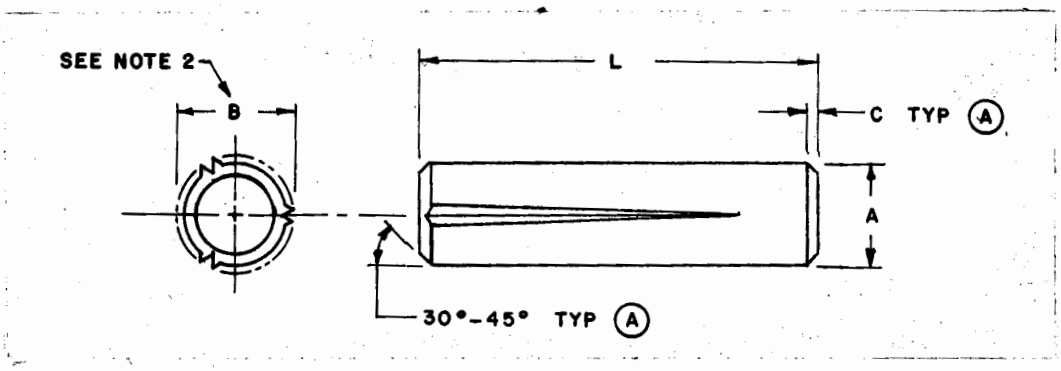

NOTES:

1. All dimensions are in millimeters.
2. Diameter "B" is the expanded diameter as measured with a "GO" and "NOT GO" ring gage.

(A) FIGURE 1. PIN, GROOVED, HEADLESS-LONGITUDINAL TAPER GROOVE.

(A) denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:55Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Material: Carbon steel, cold drawn, 1100 or 1200 series.

2. Protective finish: Cadmium plate pins up to and including 3 mm diameter. Zinc coated pins 4 mm and larger diameter.

3. Part number: Consists of letter "D" the basic number of this specification sheet and a dash number taken from table I.

Example: D63464/1-01516

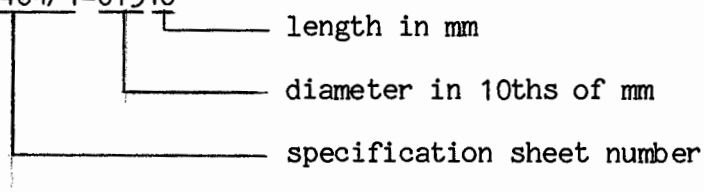

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:55Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and characteristics. (A)

Nom size		1.5	2	2.5	3	4	5	6	10
A Dia	max	1.50	2.00	2.50	3.00	4.00	5.00	6.00	10.00
	min	1.47	1.97	2.47	2.97	3.95	4.95	5.95	9.25
Recm hole size	max	1.54	2.05	2.55	3.05	4.06	5.07	6.08	10.12
	min	1.50	2.00	2.50	3.00	4.00	5.00	6.00	10.00
C Chamfer max length		0.4				0.8			1.2

L ±0.25 Length	Dash no.	B Dia +0.05 -0.00	Dash no	B Dia +0.05 -0.00	Dash no	B Dia ±0.05	Dash no	B Dia ±0.05	Dash no	B Dia ±0.05	Dash no	B Dia ±0.05	Dash no	B Dia ±0.05	Dash no	B Dia ±0.05
6.00	01506	1.63	02006	2.15												
8.00	01508	1.63	02008	2.15												
10.00	01510	1.63	02010	2.15	02510	2.70	03010	3.25								
12.00	01512	1.63	02012	2.15	02512	2.70	03012	3.25	04012	4.25	05012	5.30				
16.00	01516	1.63	02016	2.15	02516	2.70	03016	3.25	04016	4.25	05016	5.30	06016	6.30		
20.00	01520	1.60	02020	2.10	02520	2.65	03020	3.20	04020	4.25	05020	5.30	06020	6.30	10020	10.45
26.00					02526	2.65	03026	3.20	04026	4.20	05026	5.25	06026	6.30	10026	10.45
30.00							03030	3.20	04030	4.20	05030	5.25	06030	6.30	10030	10.45
40.00									04040	4.20	05040	5.25	06040	6.25	10040	10.45
50.00											05050	5.25	06050	6.25	10050	10.40
60.00													06060	6.25	10060	10.40
70.00													06070	6.25	10070	10.40

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:55Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AR
Navy - OS
Air Force - 99

Review activities:
Army - AT, EA
DLA - IS
NSA - NS

User activities:
Army - ME, MI
Navy - MC, YD

Agent:
DLA - IS

Preparing activity:
Army - AR

(Project 5315-0360)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:55Z
Check the source to verify that this is the current version before use.