MILITARY SPECIFICATION

SURVIVAL KIT, INDIVIDUAL, COLD CLIMATE, ARMY

This specification is approved for use by Natick Research and Development Laboratories, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type of survival kit.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

L-F-560	Fork, Knife, and Spoon, Picnic, Plastic
L-P-378	Plastic Sheet and Strip, Thin Gauge, polyolefin
EE-M-101	Matches, Safety: and Matches, Nonsafety (Strike-Anywhere)
QQ-W-321	Wire, Copper Alloy
ZZ-T-831	Tubing, Rubber and Plastic
PPP-B-566	Boxes, Folding, Paperboard
PPP-B-601	Boxes, Wood, Cleated-Plywood
PPP-B-636	Boxes, Shipping, Fiberboard
PPP-T-45	Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Natick Research and Development Laboratories, Natick, MA 01760 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

U.S.GOVERNMENT PRINTING OFFICE: 1981-703-023/7175

FSC 1680

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:27Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-B-117 - Bags, Sleeves and Tubing - Interior Packaging
MIL-K-818 - Knife, Pocket, General Purpose
MIL-F-6218 - Fishing Kit, Survival
MIL-B-8571 - Bag, Storage, Drinking Water
MIL-F-10805 - Fuel, Compressed, Trioxane, Ration Heating
MIL-I-11489 - Insect Net, Head
MIL-C-17850 - Compass, Magnetic, Card, Pocket, Type MC-1
MIL-M-18371 - Mirrors, Emergency Signaling, Mark 3
MIL-S-18655 - Signal, Smoke and Illumination, Marine, MK 13 MOD 0
MIL-C-25539 - Candles, Illuminating, Survival, High Melting Point
MIL-B-40042 - Box, Match, Waterproof
MIL-F-43231 - Food Packet, Survival, General Purpose
MIL-C-43647 - Cases, Individual, Survival Kit, Army
MIL-F-43700 - Poncho, Wet Weather

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-147 - Palletized Unit Loads
MIL-STD-1188 - Commercial Packaging of Supplies and Equipment

DRAWINGS

US ARMY NATICK RESEARCH AND DEVELOPMENT LABORATORIES

11-1-170 - Survival kit, Individual, Cold Climate, Army; Assembly, Complete

AIR FORCE

60C90302 - Saw-knife-shovel Assembly - Ice and Snow, Detachable Handle, Type A-2

(A miniature copy of Drawing 11-1-170 is attached for information only.)

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:27Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), the contractor shall furnish a sample for first article inspection and approval (see 4.2 and 6.4).

3.2 Materials, hardware and contents. Kit components and items comprising the kit contents shall conform to the specification and drawings referenced in table I. Components shall be free of any damage or deterioration resulting from shipment or storage (see 6.5).

3.2.1 Age limitation. Unless otherwise specified by the procuring activity (see 6.2), the items shall have been manufactured within one year prior to date of delivery of the kits.

3.3 Assembly. Except for items 6, 9 and 15, which shall be packed separately (see footnote 1, table I), each kit shall include the items listed in table I. The items shall be stowed in the cases as shown on Drawing 11-1-170.

3.4 Workmanship. The workmanship shall conform to the quality established by this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:27Z
Check the source to verify that this is the current version before use.

TABLE I. Kit components and contents list

Item No.	Nomenclature	Applicable specification	Unit packing	Unit	Quantity	Other requirements
1	Case, survival kit, type I	MIL-C-43647	None	Ea	1	
2	Case, survival kit, type III	MIL-C-43647	None	Ea	1	
3	Compass, magnetic, type MC-1	MIL-C-17850	None	Ea	1	
4	Saw-knife-shovel assembly, type A-2	USAF Drawing 60C90302	None	Ea	1	
5	First aid kit, individual	---	Nylon case	Ea	1	3/ FSN 6545-823-8165
6	Matches, non-safety, wood, type III, class 1, size 2 (1-3/4 inch length)	EE-M-101	Level A Unit	Box (Min. Count 30)	3	1/ Box waterproof overwrap (see 5.1.1.2)
7	Insect net, head	MIL-I-11489	None	Ea	1	
8	Poncho, wet weather	MIL-P-43700	None	Ea	1	
9	Signal, smoke and illumination, Marine MK 13 Mod 0	MIL-S-18655	None	Ea	2	1/
10	Candle, illuminating	MIL-C-25539	None	Ea	5	
11	Food packet, survival	MIL-F-43231	Level A	Can	7	
12	Bag, water, plastic Size A	MIL-B-8571	None	Ea	1	
13	Spoon, plastic, (for rations)	L-F-560	Level A	Ea	1	
14	Field manual-survival FM 21-76	---	None	Ea	1	2/

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:27Z
Check the source to verify that this is the current version before use.

TABLE I. Kit components and contents list (cont'd)

Item No.	Nomenclature	Applicable specification	Unit packing	Unit	Quantity	Other requirements
15	Fuel, compressed, trioxane type I	MIL-F-10805	Level A Unit pack	Bar	3	1/
16	Mirror, emergency signaling, Mark 3; type II	MIL-M-18371	Level A Unit	Ea	1	
17	Pan, Frying	NLABS Drawing 11-1-311	None	Ea	1	
18	Sleeping Bag, Arctic Survival		Vacuum container	Ea	1	
19	Box, match, waterproof	MIL-B-40042	None	Ea	1	
20	Wire, copper alloy, 20' length	QQ-W-321	None	Coil	1	.025 inch dia. annealed
21	Fishing kit, survival	MIL-F-6218	Unit	Ea	1	
22	Knife, pocket, general purpose	MIL-K-818	Level A	Ea	1	
23	Packing list (9x12 inch copy of NLABS Drawing 11-1-170)	---	None	Ea	1	3/
24	Operator's technical manual	TM 55-8465-212-10	None	Ea	1	2/

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:27Z
Check the source to verify that this is the current version before use.

TABLE I. Kit components and contents list (cont'd)

Item No.	Nomenclature	Applicable specification	Unit packing	Unit	Quantity	Other requirements
27	Solar still (Plastic sheet, 72 x 72 inches, 1-1/2 - 2 mils thick, type I, class 2, grade A, finish	L-P-378	None	Ea	1	
28	Tubing, latex, Type IV 3/16 inch OD x 72 inches lg	ZZ-T-831	None	Ea	1	

1/ Item shall not be stowed in kit prior to issue for use (see 3.3 and 5.4.1.1).

2/ Department of the Army publication.

3/ Item will be furnished by the Government (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:27Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Governments. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

4.3 First article inspection. Wnen a first article is required (see 6.2), it shall be examined for the defects specified in 4.4.3. The presence of any defect shall be cause for rejection of the first article.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase documents.

4.4.2 In-process examination. Simultaneously with the assembly operation, examination shall be made to insure that assembly of each kit conforms to the requirements in 3.3. Whenever nonconformance is noted, correction shall be made to the items affected and to the operation.

4.4.3 End item examination. The end item shall be examined for the defects listed in table II. The lot size shall be expressed in units of one survival kit. The sample unit shall be one assembled survival kit including all items (except items 6, 9, and 15) listed in table I. The inspection level shall be S-4 and the acceptable quality level (AQL) shall be 1.0 defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:27Z
Check the source to verify that this is the current version before use.

TABLE II. End item defects

Examine	Defect
Items and packaging (as applicable)	Any item missing, broken, rusted, corroded, torn, or punctured.
	Any item older than age limit specified, except when exempted from such limitation by the procuring activity (see 3.2.1).
	Packaging, where required, torn, punctured, or otherwise damaged.

4.4.4 Packaging inspection. An examination shall be made to determine that preservation, packing and marking comply with section 5 requirements, except that for kit contents unit packed as specified in table I, the applicable specification shall apply. The sample unit for this examination shall be one shipping container fully packaged except that it need not be sealed. Characteristics to be examined and the defects applicable thereto shall be as specified in table III. Examination for closure defects shall be made of shipping containers fully packaged. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 4.0 defects per hundred units.

TABLE III. Packaging defects

Examine	Defect
Marking (exterior and interior container)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, defective, or not as specified.
Workmanship	Contents not snug fit in container (loose), incomplete closure of container flaps, loose strapping or tape banding, or inadequate stapling. Bulged or distorted container.
Contents	Number per container not as specified.

4.4.5 Palletization examination. An examination shall be made to determine that palletization complies with the section 5. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspection lot. The inspection level shall be and the AQL SHALL BE 6.5 defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 202640-21T21:27Z
Check the source to verify that this is the current version before use.

TABLE IV. Palletization defects

Examine	Defect
Finished dimension	Length, width, or height exceeds specified maximum requirement.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Loads not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.

5. PACKAGING

5.1 Preservation. Preservation shall be level A.

5.1.1 Level A.

5.1.1.1 Survival kit. For each survival kit, the components specified in table I, except the items specified in footnote 1/ therein, shall be stowed in the outer and inner case as indicated in NLABS Drawing 11-1-170. The voids reserved for the components to be stowed in the kit at the time of issue (see 6.3), shall be filled with dunnage to prevent movement of the stowed components while in transit. The kit shall be closed and the attaching straps adjusted tightly so that they extend to the center of the front of the kit. The snaps shall be secured to each other by means of tape or twine. Each survival kit shall then be unit packed in a snug-fitting fiberboard box conforming to style RSC, grade W6C of PPP-B-636. Each box shall be securely closed and waterproofed with tape as specified in the appendix of PPP-B-636.

5.1.1.2 Matches. Matches, unit packed as specified in table I, shall be placed in a snug-fitting bag conforming to type II, class E, style 1 or 3 of MIL-B-ll7. The bag shall be closed by heat sealing. Prior to or during the final heat sealing closure operation, excess air within the bag shall be expelled. Twelve boxes of matches, bagged as specified herein, shall then be packed in a snug-fitting, folding, intermediate paperboard box comforting to variety 1, style III, type G, class 1 of PPP-B-566; or setup paperboard box comforting to type I, variety 1, class i, style 4 of PPP-B-676. Box closure shall be secured with 2 inch minimum width gummed paper tape conforming to type III, grade B of PPP-T-45, applied at the center of the length opening and extending along the bottom and up the sides at least 1 inch.

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:27Z
Check the source to verify that this is the current version before use.

5.1.1.3 Trioxane fuel and smoke signals. Trioxane fuel and smoke signals shall be unit packed in accordance with the applicable requirements specified in the respective component specifications.

5.2 Packing. Packing shall be level A or B as specified (see 6.2).

5.2.1 Level A packing.

5.2.1.1 Survival kits. Three survival kits, presserved as specified in 5.1, shall be packed in a snug-fitting shipping container conforming to style RSC, grade V2S of PPP-B-636; or overseas type, style A or I, grade A, type 2 load of PPP-B-601, as specified (see 6.2). Each shipping container shall be closed and shall be closed and reinforced in accordance with the appendix of the applicable container specification.

5.2.1.2 Matches, trioxane fuel, and smoke signals. Matches, trioxane fuel and smoke signals, preserved as specified in 5.1 shall be packed in accordance with the applicable requirements specified in the respective component specifications.

5.2.2 Level B packing.

5.2.2.1 Survival kits. Three survival kits, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. Each shipping container shall be closed in accordance with method II as specified in the appendix Of PPP-B-636.

5.2.2.1 Weather-resist containers. When specified (see 6.2), the shipping container shall be a grade V3C V3S or V4S fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix of the container specification.

5.2.2.2 Matches, trioxane fuel, and smoke signals. Matches, trioxane fuel, and smoke signals, preserved as specified in 5.1 shall be packed in accordance with the applicable requirements specified in the respective component specifications.

5.3 Palletization. When specified (see 6.2), survival kits, packed as specified in 5.2, shall be palletized in accordance with load type I of MIL-STD-147. Each prepared load shall-be bonded with primary and secondary straps in accordance with bonding means K and L. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the pallet patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

5.4 Marking. In addition to any special marking required by the contract, unit packs, intermediate packs, shipping containers, and palletized unit loads (when applicable) shall be marked in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:27Z
Check the source to verify that this is the current version before use.

5.4.1 Labeling.

5.4.1.1 Unit pack legend. Each survival kit shall be marked with the following legend printed, typed, or reproduced on a white paper label securely affixed to each unit pack.

"WARNING" This kit is not complete. When issued for use, the following items shall be stowed in their respective places in the kit (see inclosed packing list):

(1) Matches (3 Boxes) FSN 9920-985-6891.
(2) Signal, smoke and illumination (2 each) FSN 1370-309-5028.
(3) Fuel, compressed trioxane (Box of 3) FSN 9110-263-9865.

REMOVE THIS LABEL AFTER INSTALLING ABOVE ITEMS"

The label shall be protected with a waterproof coating as specified in MIL-STD-129.

5.4.1.2 Shipping container legend. Each shipping container shall be marked with the following legend:

"WARNING: Kits contained herein are not complete. Complete in accordance with instructions on interior package label prior to issue for use

REMOVE THIS LABEL IF THIS CONTAINER IS USED FOR COMPLETED KITS"

6. NOTES

6.1 Intended use. The survival kit is intended for use by Army aviators exposed to emergency situations in remote and isolated, temperate, sub-arctic, and arctic areas,

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) When a first article is required (see 3.1, 4.2 and 6.4).
(c) Material to be Government furnished (see table I, footnote 3).
(d) Any exception to the age limitation requirement of 3.2.1.
(e) Selection of the applicable level of packing (see 5.2).
(f) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1.1).
(g) When palletization is required (see 5.3).
(h) Type of shipping container desired for level A packing (see 5.2.1.1).

6.3 Prior to issue. Prior to issue of the survival kit, the matches, fuel, and signals are to be placed within the inner case in their respective positions as indicated by Drawing 11-1-170.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:27Z
Check the source to verify that this is the current version before use.

6.4 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of DAR 7-104.55. The first article should be a preproduction sample and consist of one survival kit. The contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the first article.

6.5 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of the specification (see 3.2).

6.6 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to t-he previous issue, due to the extensiveness of the changes.

Custodian:

Army - GL

Review activities:


Army - AV, MD

Preparing activity:


Army - GL

Project No. 1680-A483

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:27Z
Check the source to verify that this is the current version before use.

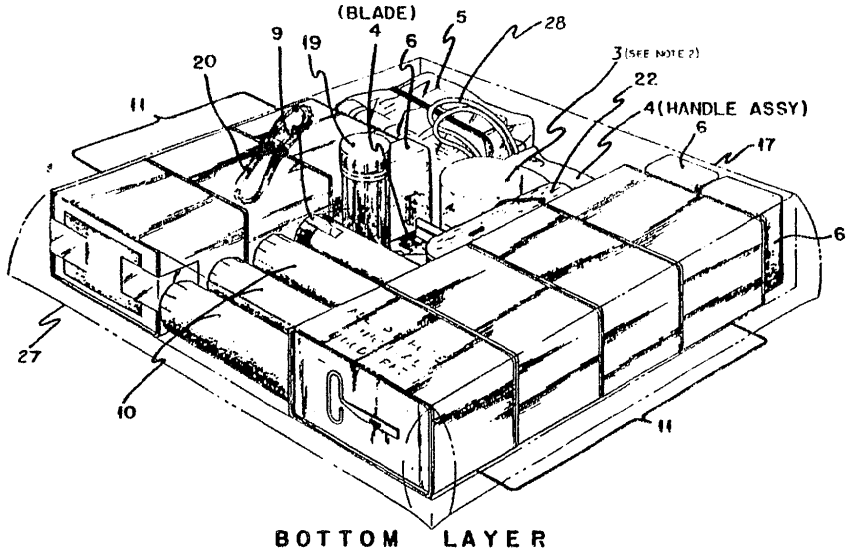

BOTTOM LAYER

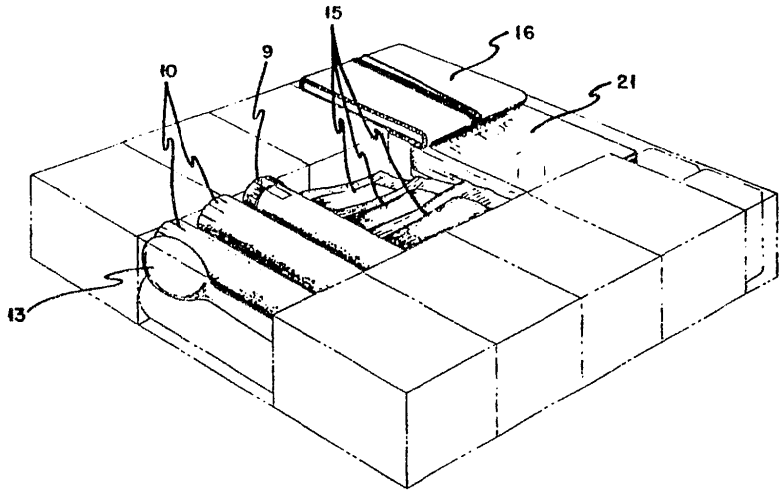


TOP LAYER

INNER CASE ARRANGEMENT

ITEM LIST

ITEM NO.	DESCRIPTION	QTY	MATERIAL	SPEC	PART NO.
1	CASE, OUTER	1			
2	CASE, INNER	1			
3	COMPASS, MAGNETIC, POCKET, TYPE IV, 1	1			
4	SAW-KNIFE SHOVEL ASSEMBLY, TYPE A 2	1			
5	FIRST AID KIT, INDIVIDUAL	1			
6	MATCHES, NON SAFETY, WOOD	3			
7	HEADNET, INSECT	1			
8	POMADE, LIGHT (WITH HOOD	1			
9	SIGNAL, (DAY) AND ILLUMINATION PYROTECHNIC M 18 HOOD	2			
10	CANDLE, ILLUMINATING, TYPE II	1			
11	FOOD PACKET, SURVIVAL	7			
12	BAG, WATER, PLASTIC, SIZE A	1			
13	SPOON, PLASTIC	1			
14	MANUAL, SURVIVAL	1			FM 21-76
15	FUEL, COMPRESSED, RATION HEATING	6			
16	HOOK, SNARING, NO 3	1			
17	PAN, FRYING	1			
18	SLEEPING BAG	1			
19	BOX, MATCH, WATERPROOF	1			
20	WIRE, SNARE, 30 FEET LONG	1			
21	FISHING KIT, EMERGENCY	1			
22	KNIFE, POCKET	1			
23	PACKING LIST 10 X 12 INCH	1			
24	OPERATOR'S MANUAL	1			
25	DELETED				
26	DELETED				
27	SILVA STILL - 72 INCH SQUARE OF PLASTIC FILM FOLDED TO 36 INCH SQUARE.	1			
28	TUBING, LATEX, 5/16 OD X 72 INCH L	1			

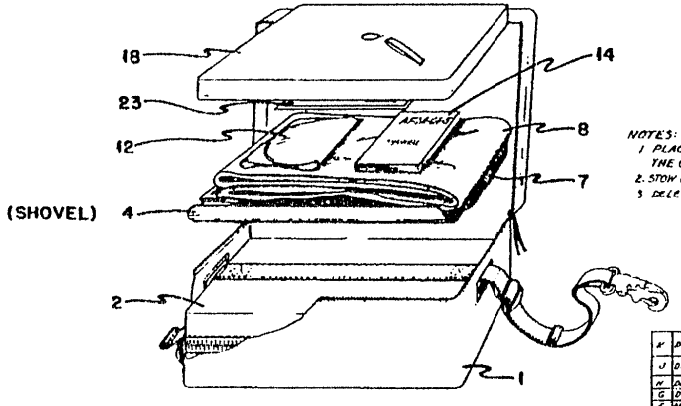

NOTES:
1. PLACE THE TM (ITEM 24) IN THE POCKET OF THE OUTER CASE
2. STOW COMPASS UPSIDE DOWN
3. DELETED

COMPLETE ASSEMBLY
FSN 1680-973-1862

SURVIVAL KIT
COLD CLIMATE

SURVIVAL KIT, INDIVIDUAL, COLD CLIMATE, ARMY, ASSEMBLY, COMPLETE

11-1-170

MIL-S-43456B(AS)

Source: https://assist.dla.mil - Downloaded: 2020-10-21T21:27Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-S-43456B(GL) Survival Kit, Individual, Cold Climate, Army

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1426 1 OCT 76

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:27Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATE

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research and Development Command
Attn: DRDNA-ES
Natick, MA 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 202640-21T21:27Z
Check the source to verify that this is the current version before use.