AA-O-00230/2B (GSA-FSS)
June 15, 1979
INTERIM REVISION of
Fed. Spec AA-O-230/2a
October 7 1964

INTERIM FEDERAL SPECIFICATION

OFFICE FURNITURE: CABINET, TELEPHONE, EXECUTIVE TYPE, WOOD TRADITIONAL
(DETAILED SPECIFICATION)

This Interim Federal Specification was developed by the National Furniture Center, Federal Supply Service, General Services Administration Washington. DC 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

The General Services Administration has authorized the use of this Interim Federal Specification as a valid exception to Federal Specification AA-O-230/2a, dated October 7, 1964.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers the detailed requirements in traditional design for an executive office telephone cabinet. General requirements and other information pertaining to the cabinets will be found in AA-O-00230B/GEN, Office Furniture, Executive Type, Wood, Traditional (General Specification).

1.2 Classification. The telephone cabinets covered by this specification shall be of one type and size as shown in the figures.

2. APPLICABLE DOCUMENTS

2.1 The specifications and standards of the issue in effect on date of invitation for bids, which form a part of this specification, are listed in 2.1 of AA-O-00230/GEN hereinafter called the General Specification (G.S.).

2.2 Other publications. The documents which form a part of this specification are listed in 2.2 (G.S.).

3. REQUIREMENTS

3.1 Materials. Materials used in construction of the cabinet shall be as specified in the applicable paragraphs in the General Specification (see table I).

TABLE I. Materials index

Component	AA-O-00230/GEN Par. No.	Component	AA-O-00230/GEN Par. No.
Adhesive	3.1.1 Gen. Spec.	Particleboard	3.1.4.6 G.S.
Lacquer	3.1.3 G.S.	Face hardware	3.1.5.1 G.S.
Wood species	3.1.4.1 G.S.	Strike plate	3.1.5.1.2 G.S.
Solid wood requirements	3.1.4.2 G.S.	Adjustable glides, regular	3.1.5.2.2 G.S.
Wood seasoning	3.1.4.3 G.S.	Shelf standards & supports	3.1.5.3 G.S.
Hardwood plywood	3.1.4.4 G.S.	Other hardware	3.1.5.4 G.S.
Good grade (1) veneer	3.1.4.5 G.S.		

FSC 7110

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the current version before use.

3.2 Construction. General construction requirements for cabinet components shall be as specified in the applicable paragraphs in the General Specification (see table II).

TABLE II. Construction requirements index

Requirement	AA-O-00230/GEN Par. No.	Requirement	AA-O-00230/GEN Par. No.
Tolerances	3.2.2 Gen Spec.	Posts	3 2.9
Direction of grain	3.2.3 G.S.	Patterned base apron	3.2.10
Joinery	3.2.4 G.S.	Base supports	3.2.11
Tops	3.2.6 G.S.	Built-up stock	3.2.13
Dowels	3.2.7 G.S.		

3.2.1 Design. The design of the bookcases shall be as shown in figure 1.-

3.2.2 Slotting. The cabinets shall be slotted through the fixed shelf and bottom and provided with a concealed opening at the top for telephone wires. A channel approximately 3 inches long by 3/4 inch wide by 1/4 inch deep shall be cut-i the underside of the top to allow wire to be placed over the center of the back panel.

3.2.3 Top. The top shall be minimum 5-ply, 1 3/8-inch thick plywood (3.1.4.4 G.S.) with solid molded edges, and corners shall be as shown in figure 2. The border veneers shall be 1 1/2 inches wide. Grain direction shall be as shown in figure 1. The tops shall be positioned as specified in 3.2.6 G.S.

3.2.4 Doors. The doors shall be minimum 5-ply, 3/4-inch thick plywood (3.1.4.4 G.S.). All four edges shall be banded (3.1.4.4 G.S.) before the application of the moulded edge. Each door shall have a pull (3.1.5.1 G.S.) as shown in figure 1. Hinges shall be as specified in 3.1.5.4 G.S. Clearance around door shall be 1/16 to 3/32 inch.

3.2.5 Shelves. Each cabinet shall be provided with two adjustable and one fixed shelf. Shelves shall be 5-ply, 3/4-inch thick lumber core plywood (3.1.4.4 G.S.). Adjustable shelves shall be supported by standards and supports (3.1.5.3 G.S.).

3.2.6 Other plywood parts. All other plywood parts shall be minimum 5-ply, 3/4 inch thick (3.1.4.4 G.S.).

3.3 Finishing. See 3.3.1 G.S., 3.3.2 G.S. and 3.3.3 G.S.

3.4 Identification marking. See 3.4 G.S.

3.5 Workmanship. See 3.5 G.S.

4. QUALITY ASSURANCE PROVISIONS

4.1 The quality assurance provisions shall be as specified in section 4 of the General Specification and as specified herein.

4.2 Assembly examination. An examination of the assembly of the shelves to the cabinet shall be made. The lot size shall be units of bookcases Defects shall be recorded in accordance with table III. Inspection level and acceptable quality level (AQL) shall be as specified in 4.4 G.S. (Note: Unassembled shelves to cabinets, selected by the Government inspector, shall be fully assembled by the contractor. The inspector shall witness the assembly and shall observe the ease of assembly and fit of components.)

Source: https://assist.dla.mil -- Downloaded: 20260-26T11:39Z
Check the source to verify that this is the current version before use.

TABLE III. Assembly defects

Examine	Defects
Shelf assembly and fittings	Shelf standards or supports out of alignment. Shelf supports not adjustable to positions as specified. Shelf support does not fit into slot in standard. Shelf support too loose in standard. i.e., falls out easily. Shelf wobbles on shelf support. Shelf does not fit neatly on support.

5. PREPARATION FOR DELIVERY

5.1 Packaging, packing, and marking. Packaging, packing and marking shall be in accordance with PPP-P-1877. Packaging shall be level A, B, or C as specified (see 6.2) packing shall be level A, B, or C as specified (see 6.2); and marking shall be for civil agencies or military activities as specified (see 6.2).

6. NOTES

6.1 Intended use. The executive office type telephone cabinet in traditional styling was designed for use in executive offices, courtrooms, libraries and conference rooms of Federal agencies. The cabinets should compliment the traditional decor of executive areas when used with other items within the group.

6.2 Ordering data. Purchasers should exercise any desired options offered herein and should specify the following:

(a) Title, symbol and date of this specification.
(b) Title, symbol, and date of the General Specification.
(c) Level of packaging and packing.
(d) Marking requirements.

GSA GC-81005657

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.


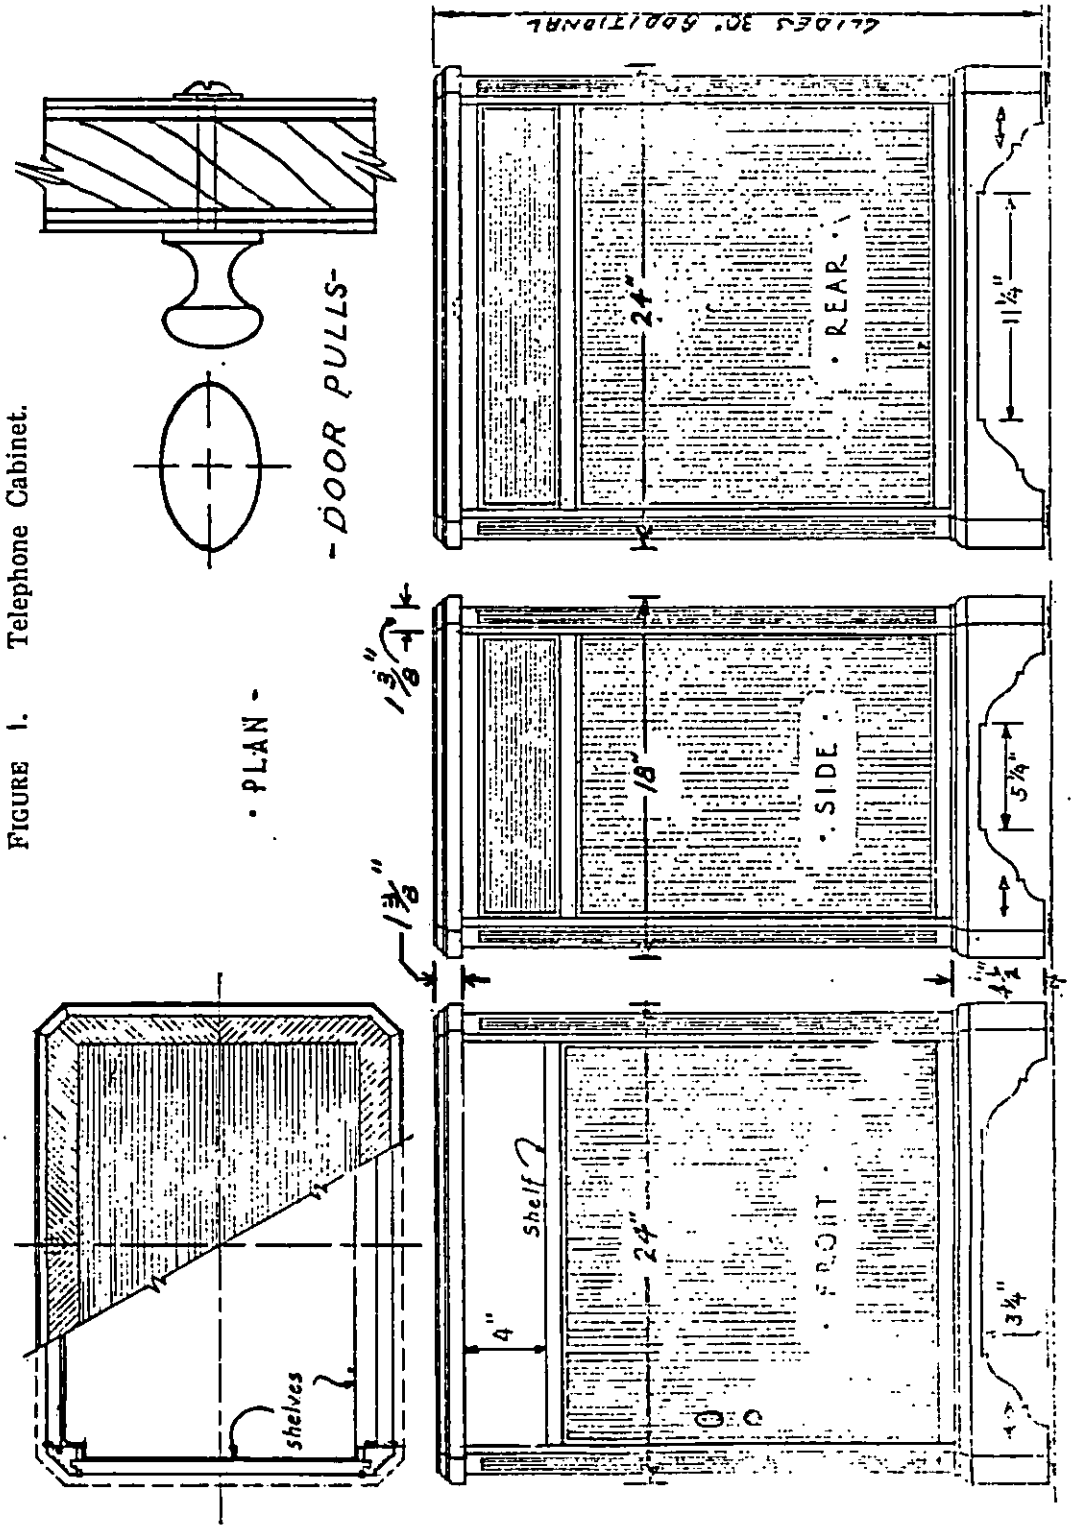


FIGURE 1. Telephone Cabinet.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

FIGURE 2. Top, Corner, and Base Detail

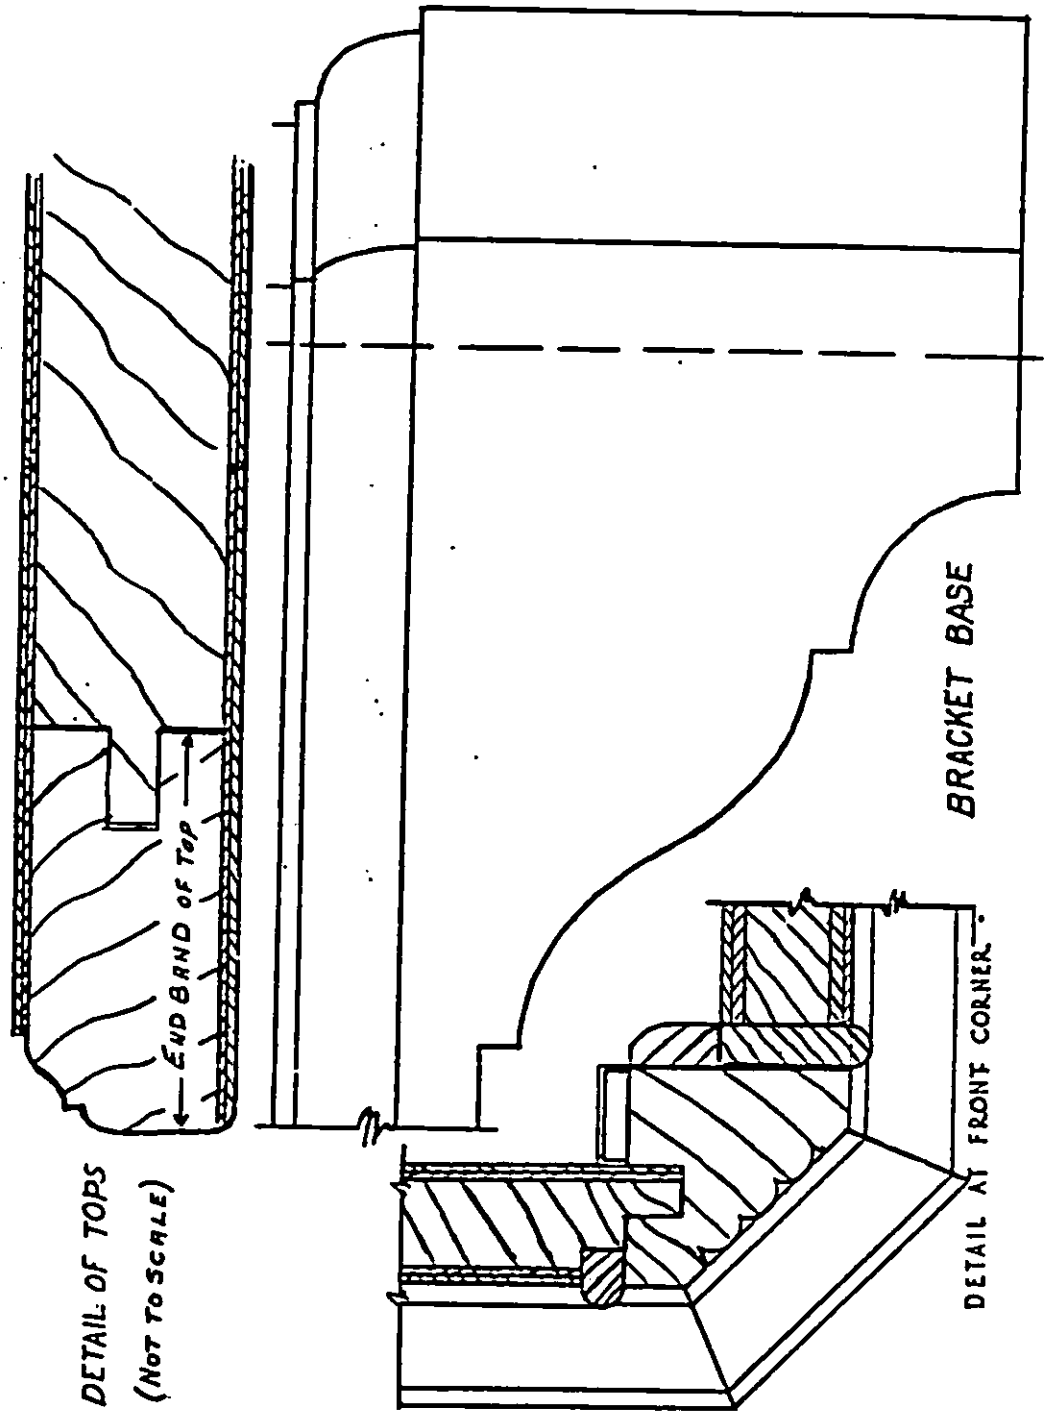

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.