INCH-POUND
MIL-PRF-15160/36B
w/AMENDMENT 1
14 April 2020
SUPERSEDING
MIL-PRF-15160/36B
12 October 2011


PERFORMANCE SPECIFICATION SHEET

FUSES, STYLE F36

INACTIVE FOR NEW DESIGN
AFTER 27 DECEMBER 1990

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-15160.

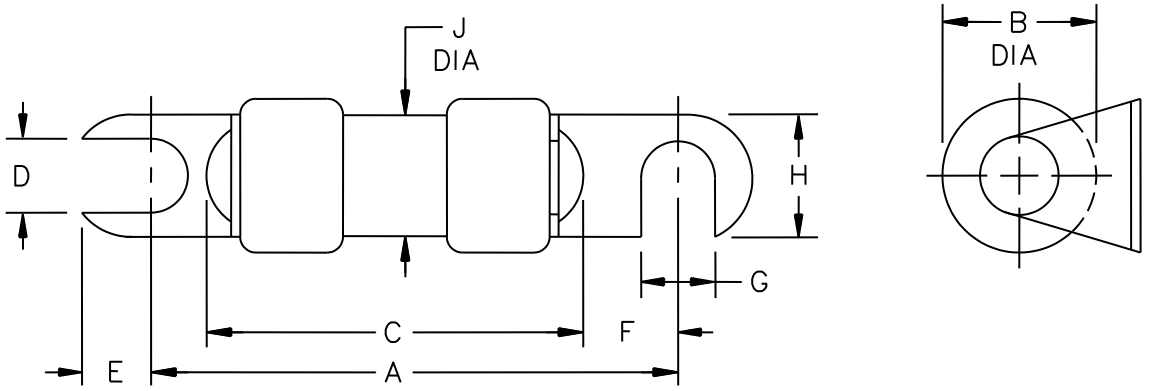

Ltr	Inches		mm	
	Min	Max	Min	Max
A	2.219	2.281	56.36	57.94
B	.531	.593	13.49	15.06
C	1.594	1.656	40.49	42.06
D	.234	.296	5.94	7.52
E	.219	.281	5.56	7.14
F	.281	.343	7.14	8.71
G	.234	.296	5.94	7.52
H	.469	.531	11.91	13.49
J	.469	.531	11.91	13.49

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 1. Style F36.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:45Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Interface and physical dimensions: See figure 1.

Body: Fiber.

Ferrule: Brass.

Terminal strength: 5 inch-pounds.

Type designation: Type designation shall be as specified in table I.

Electrical:

Voltage rating: 125 volts dc maximum.

Overload interrupt:

Characteristic A: Maximum 1 hour at 135 percent of rated current.

Characteristic B: Maximum 1 hour at 135 percent of rated current, and a minimum of 30 seconds at 300 percent

Short circuit interrupt: 10,000 amperes at 125 volts dc.

Current rating: See table I.

Voltage rating: See table I.

Characteristic: See table I.

TABLE I. Type designation and electrical rating.

Style	Characteristic	Voltage	Current
F36	A	125 V	1 A
F36	A	125 V	2 A
F36	A	125 V	3 A
F36	A	125 V	5 A
F36	A	125 V	10 A
F36	A	125 V	15 A
F36	B	125 V	1 A
F36	B	125 V	2 A
F36	B	125 V	3 A
F36	B	125 V	5 A
F36	B	125 V	10 A
F36	B	125 V	15 A

VERIFICATION:

Qualification is not applicable for this specification sheet and is replaced by successful completion of group A and group B inspections in MIL-PRF-15160, before product is delivered.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:45Z
Check the source to verify that this is the current version before use.

Referenced documents. This document only references MIL-PRF-15160.

Amendment notations. The margins of this specification sheet are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodians:
Army - CR
Navy - SH
Air Force - 85
DLA - CC

Preparing activity
DLA - CC

(Project 5920-2020-006)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:45Z
Check the source to verify that this is the current version before use.