MIL-P-20636F
25 March 1981
SUPERSEDING
MIL-P-20636E
26 November 1971

MILITARY SPECIFICATION

POSTS, FENCE, METAL: DRIVE-TYPE, SPADELESS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers metal, drive-type, spadeless fence posts.

1.2 Classification. The fence posts shall be the following sizes, as specified (see 6.2):

Size 1 - 96 inches overall length.
Size 2 - 72 inches overall length.
Size 3 - 60 inches overall length.
Size 4 - 32 inches overall length.
Size 5 - 24 inches overall length.

2. APPLICABLE DOCUMENTS

2.1 Issue of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein.

FSC 5660

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to; US Army Mobility Equipment Research and Development Command, ATTN: DRDME-DS, Fort Belvoir, VA 22060 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:08Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

FF-N-105	- Nails, Brads, Staples and Spikes: Wire, Cut and Wrought.
NN-P-71	- Pallets, Material Handling, Wood, Stringer Construction, 2-Way and 4-Way (Partial).
QQ-S-781	- Strapping, Steel, and Seals.

MILITARY

MIL-T-704	- Treatment and Painting of Materiel.

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-147	- Palletized and Containerized Unit Loads, 40" x 48" Pallets, Skids, Runners, or Pallet-Type Base.
MIL-STD-1188	- Commercial Packaging of Supplies and Equipment.

(Copies of specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI/ASTM A 569	- Steel, Carbon (0.15 Maximum, Percent), Hot-Rolled Sheet and Strip, Commercial Quality.
ANSI/ASTM A 659	- Steel, Carbon (0.16 Maximum to 0.25 Strip, Commercial Quality.

Source: https://assist.dla.mil -- Downloaded: 202610-19T08:08Z
Check the source to verify that this is the currenversion before use.

(Application for copies should be addressed to the American National Standards Institute, 1430 Broadway, New York, NY 10089).

STEEL STRUCTURES PAINTING COUNCIL (SSPC)

SSPC-SP-6	- Surface Preparation Specification No. 6 Commercial Blast Cleaning.
SSPC-SP-8	- Surface Preparation Specification No. 8 Pickling.

(Application for copies should be addressed to the Steel Structures Painting Council, 4400 Fifth Avenue, Pittsburgh, PA 15213.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Description. The fence posts shall be as shown in Figure 1 and 2 and as specified herein.

3.2 First article. When specified (see 6.2), the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3 and 6.3).

3.3 Material. The posts shall be steel conforming to ANSI/ASTM A 659, - UNS G10150-G10230, ANSI/ASTM A 569 or shall be rerolled rail steel. Nominal thickness of the steel shall be 0.125 for steels having a yield of 33,000 pounds per square inch (psi) or less, and 0.100 inch for steels having a yield more than 33,000 psi (see 6.4).

3.4 Cleaning, treatment, and painting.

3.4.1 Cleaning. Each post, prior to painting, shall be free from rust, loose scale, oil, and other deleterious matter which would adversely affect paint adherance; otherwise posts shall be cleaned by pickling or sandblasting prior to painting in accordance with SSPC-SP-6 or SSPC-SP-8, as applicable.

3.4.2 Treatment and painting. Treatment and painting shall be in accordance with MIL-T-704, Type A, color forest green. Color chips may be obtained from the Commander, U.S. Army Mobility Equipment Research and Development Command, ATTN: DRDME-VO, Fort Belvoir, Virginia 22060.

Source: https://assist.dla.mil -- Downloaded: 202610-19T08:08Z
Check the source to verify that this is the currentversion before use.

3.5 Workmanship. Steel used in fabrication of posts shall be free from surface imperfections, cracks, folds, pipe, lamination, seams, laps, kinks, and sharp bends. The bending or steel shall be done by methods that will not cause damage to the metal. Shearing shall be clean and all burrs and sharp edges removed. The posts shall exhibit no camber or twist.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspections. Inspections requirements specified herein are classified as follows:

(a) First article inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).
(c) Inspection of packaging (see 4.6).

4.3 First article inspection.

4.3.1 Examination. The first article posts shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.4 Quality conformance inspection..

4.4.1 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.4.2 Examination. Samples selected in accordance with 4.4.1 shall be examined as specified in 4.5.1. AQL shall be 2.5 percent defective.

4.5 Inspection procedure.

4.5.1 Examination. The posts shall be examined as specified herein for the following defects:

101. Dimensions not in accordance with figures.
102. Material not as specified.
103. Slots omitted or improperly located.
104. Taper omitted.
105. Cleaning, treatment, and painting not as specified.
106. Workmanship not as specified.

Source: https://assist.dla.mil -- Downloaded: 202610-19T08:08Z
Check the source to verify that this is the currentversion before use.

4.6 Inspection of packaging.

4.6.1 Quality conformance inspection of pack.

4.6.1.1 Unit of product. For the purpose of inspection, a completed pack of metal fence posts prepared for shipment shall be considered a unit of product.

4.6.1.2 Sampling. Sampling shall be in accordance with MIL-STD-105.

4.6.1.3 Examination. Samples selected in accordance with 4.6.1.2 shall be examined for the following defects. AQL shall be 2.5 percent defective.

107.	Materials and methods of packing not as specified. Each incorrect material and method shall constitute one defect.
108.	Bundles not in accordance with Figure 3.
109.	Strapping not as specified for Levels A and B.
110.	Wood battens not as specified for Levels A and B.
111.	Corner protectors not used on the bundle edges for Levels A and B.
112.	Size 4 posts not palletized as specified for Levels A and B.
113.	Pallets not as specified for Levels A and B.
114.	Marking missing, illegible, incorrect or incomplete.

5. PACKAGING

5.1 Packing. Packing shall be Level A, Level B, or Commercial, as specified (see 6.2).

5.1.1 Level A. The posts of like size and description shall be bundled as shown in Figure 3. Strapping shall conform to QQ-S-781 and shall be zinc coated. Wood battens shall be nominal 3 inches by 4 inches, beveled 45 degrees on each end. Corner protectors shall be used under straps. Strapping seals shall be located over one of the five voids between the stacks of posts on top of each bundle. Straps shall be secured to bottom of battens with staples placed every 6 inches. Staples shall be cement coated and shall conform to FF-N-105.

5.1.2 Level B. The posts of like size and description shall be bundled as specified in 5.1.1, except that the strapping is not required to be zinc coated.

5.1.3 Palletizing for Size 4 posts (Level A or B). Unless otherwise specified, (see 6.2), three strapped bundles of 111 each fence posts (see 5.1.1) shall be palletized in accordance with MIL-STD-147 with the following additions and exceptions:

(a) Pallets shall conform to NN-P-71, Type II, IV, or V, Size 2, Group II or III.
(b) 40-inch dimension shall be reduced to approximately 32 inches (to fit the load).

Source: https://assist.dla.mil -- Downloaded: 202610-19T08:08Z
Check the source to verify that this is the currentversion before use.

(c) Each stringer shall have an additional strap groove which shall be positioned under the center deck board.
(d) Five straps shall be used, three girthwise, two lengthwise.
(e) Strapping shall conform to QQ-S-781, Type I or IV, Finish B, Grade 1, Size 1-1/4 inch by 0.035 inch.

5.1.4 Palletizing for Size 5 posts (Level A or B). Unless otherwise specified, (see 6.2) four strapped bundles of 111 each fence posts (see 5.1.1) shall be palletized in accordance with MIL-STD-147 with the following additions and exceptions:

(a) Pallets shall conform to NN-P-71, Type II, IV or V, Size 2, Group II or III.
(b) 40-inch dimension shall be reduced to approximately 32 inches (to fit the load).
(c) Four straps shall be used, two girthwise, two lengthwise.
(d) Strapping shall conform to QQ-S-781, Type I or IV, Finish B, Grade 1, Size 1-1/4 inch by 0.035 inch.

5.1.5 Commercial. Posts shall be bundled; packing shall be in accordance with MIL-STD-1188.

5.2 Marking. Each bundle and each palletized load shall be marked. Marking for military levels of protection shall be in accordance with MIL-STD-129. Commercial marking shall be in accordance with MIL-STD-1188.

6. NOTES

6.1 Intended use. Fence posts are used to provide framework and support for erecting military barbed wire entanglements and fencing.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Size of fence post required (see 1.2).
(c) When a first article is required for inspection and approval (see 3.2, 4.3, and 6.3).
(d) Degree of packing required (see 5.1).
(e) When palletizing is not required for Size 4 or 5 posts (see 5.1.3 and 5.1.4).

6.3 First article. When a first article is required, it shall be tested and approved under the appropriate provisions of 7-104.55 of the Defense Acquisition Regulation (DAR). The first article should be a first production item. The contracting officer should include specific instructions in all procurement instruments, regarding arrangements for examinations and approval of the first article.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:08Z
Check the source to verify that this is the current version before use.

6.4 Recycled material. It is encouraged that recycled material be used, when practical, as long as it meets the requirements of this specification (see 3.3).

Custodians:
Army - ME
Navy - YD
Air Force - 99


Review activity:
DLA - CS

User activities:
Army - CE
Navy - MC

Preparing activity:
Army - ME

Project 5660-0063

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:08Z
Check the source to verify that this is the current version before use.

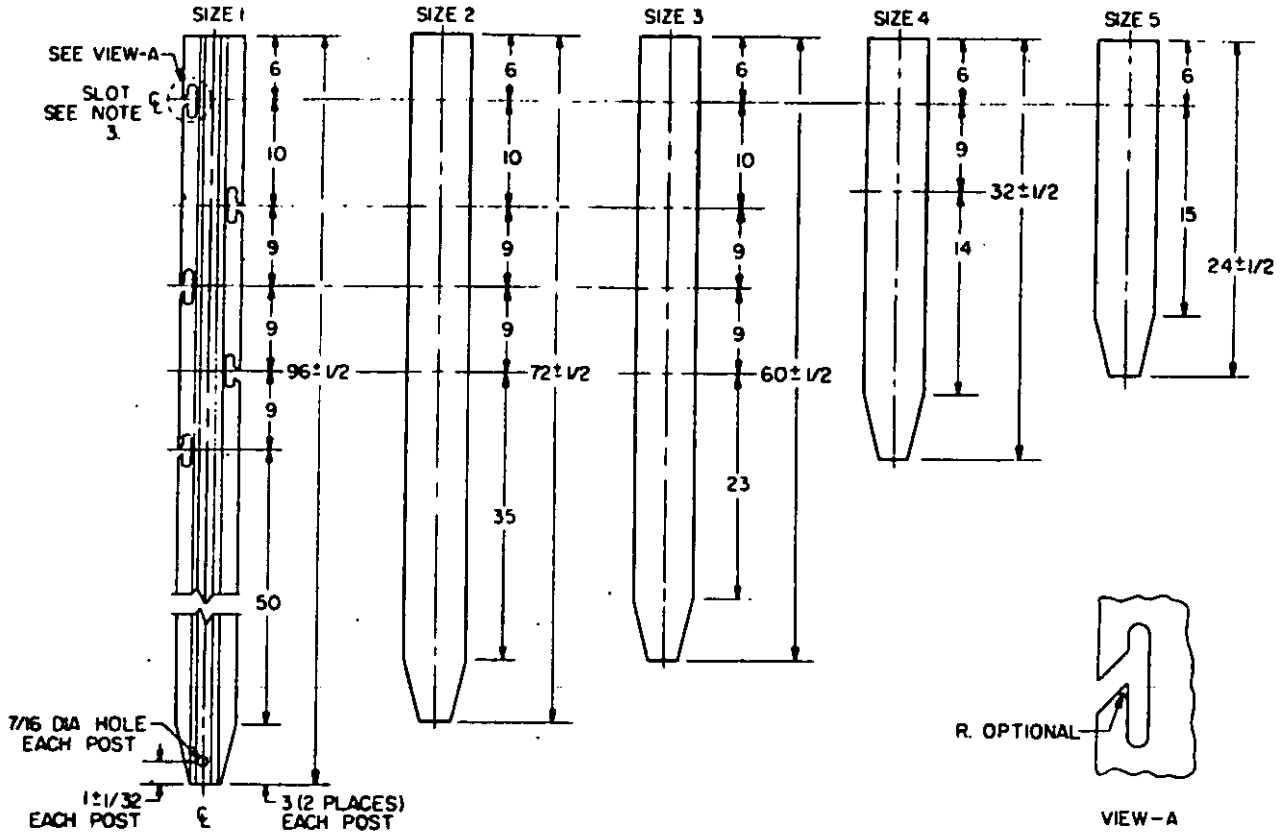

NOTES:

1. DIMENSIONS ARE IN INCHES.
2. EXCEPT AS NOTED TOLERANCE TO BE ±1/4 AND SHALL NOT BE CUMULATIVE.
3. SLOT 5 PLACES SIZE 1
   " 4 " " 2
   " 4 " " 3
   " 2 " " 4
   " 1 " " 5

FIGURE 1. Fence posts.

X-870A

Source: https://assist.dla.mil -- Downloaded: 2026/10-19T08:08Z
Check the source to verify that this is the current version before use.


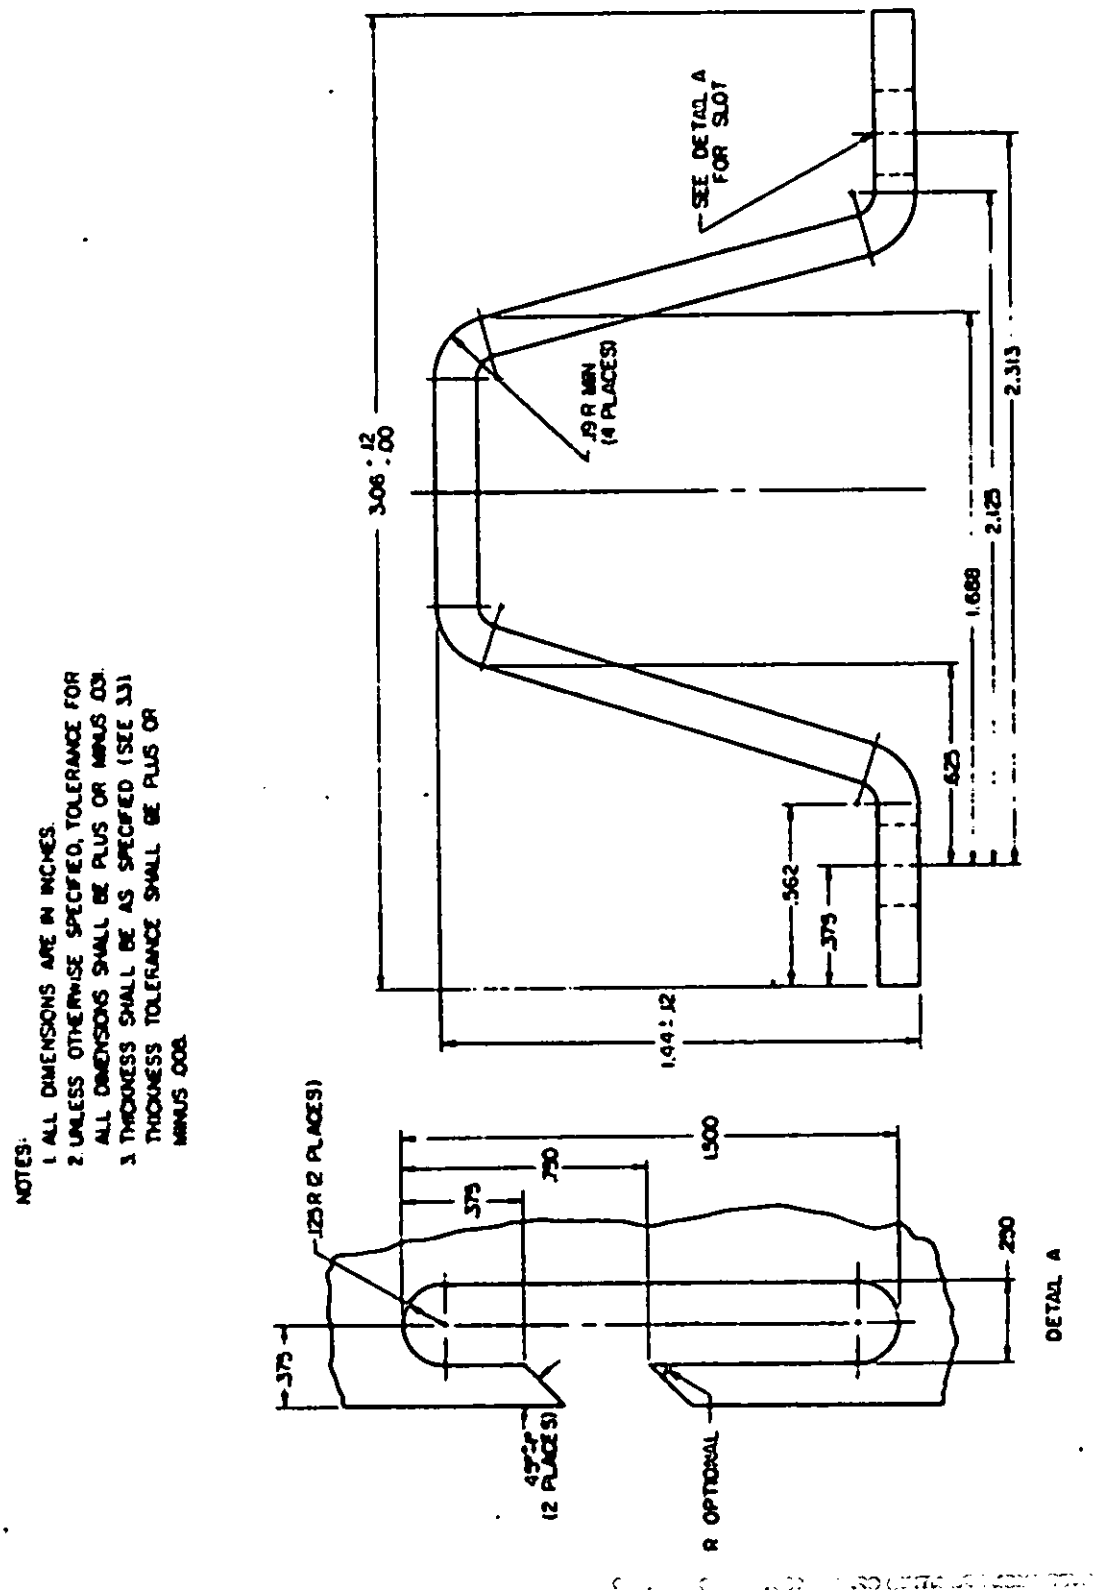


FIGURE 2. Fence post cross section and slot detail

X-872A

Source: https://assist.dla.mil -- Downloaded: 202610-19T08:08Z
Check the source to verify that this is the current version before use.

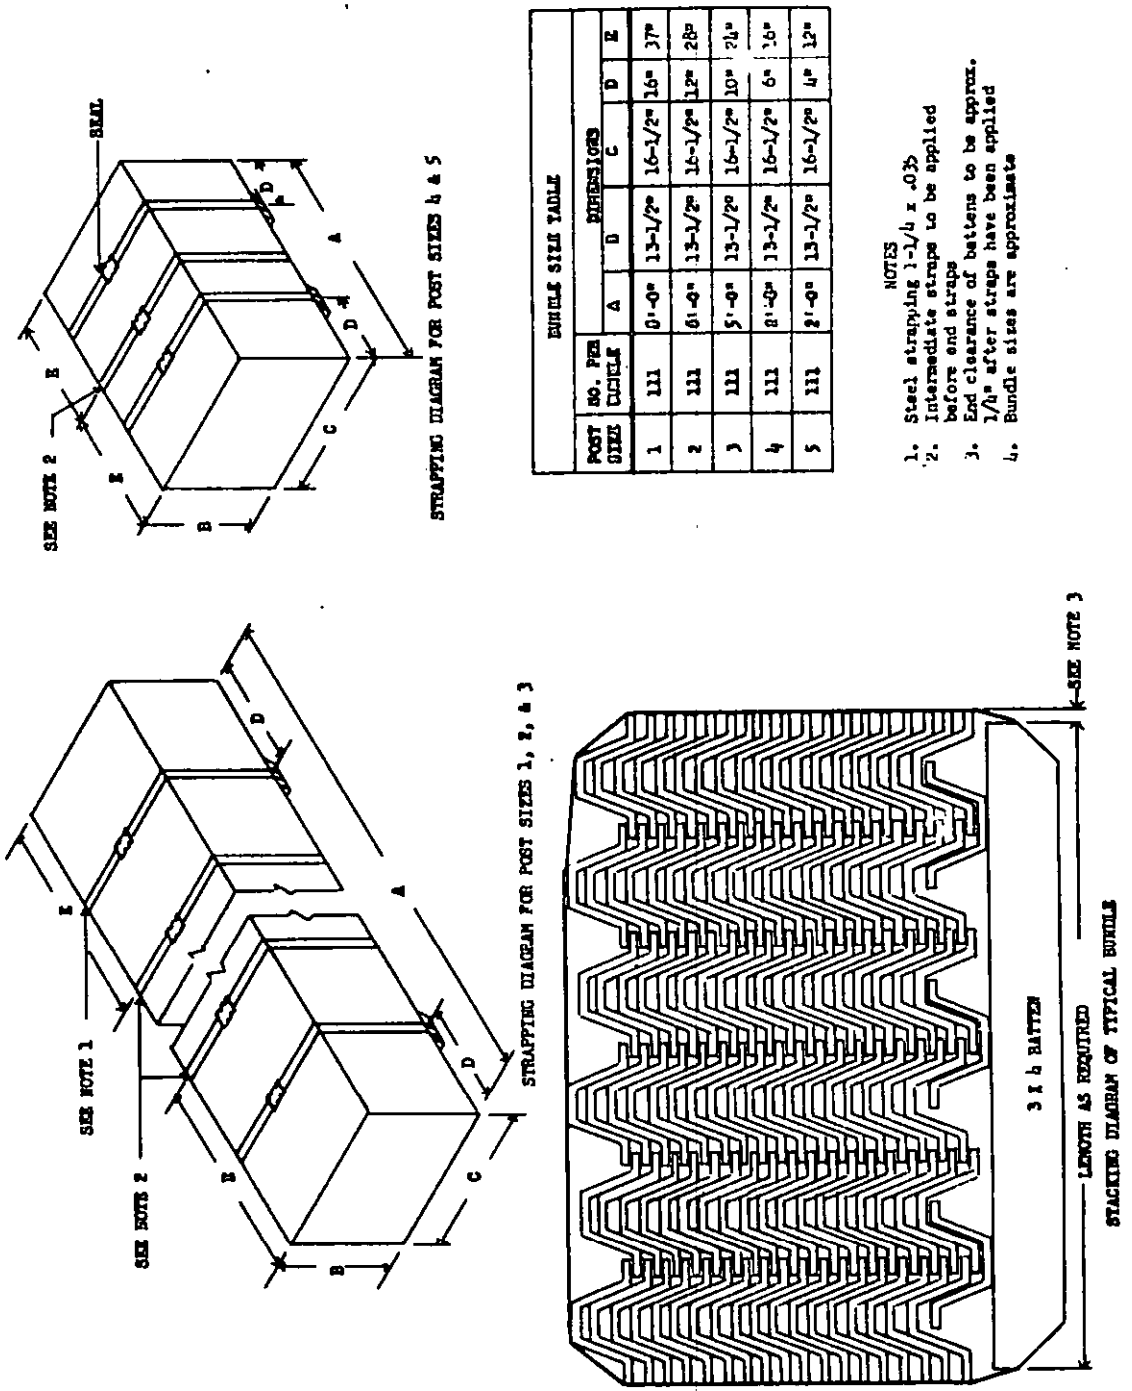

BUNDLE SIZE TABLE			DIMENSIONS				
POST SIZE	NO. PER BUNDLE	A	B	C	D	E
1	111	0'-0"	13-1/2"	16-1/2"	16"	37"
2	111	6'-0"	13-1/2"	16-1/2"	12"	28"
3	111	5'-0"	13-1/2"	16-1/2"	10"	24"
4	111	8'-0"	13-1/2"	16-1/2"	6"	16"
5	111	2'-0"	13-1/2"	16-1/2"	4"	12"

NOTES
1. Steel strapping 1-1/4 x .025
2. Intermediate straps to be applied before end straps
3. End clearance of battens to be approx. 1/4" after straps have been applied
4. Bundle sizes are approximate

FIGURE 3. Packing of post, fence, metal, steel, drive-type, anchorless,(spadeless).

X-873A

Source: https://assist.dla.mil -- Downloaded: 202610-19T08:08Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Mobility Equipment Research & Development Command
ATTN: DRDME-DS
Fort Belvoir, VA 22060

Source: https://assist.dla.mil -- Downloaded: 202610-19T08:08Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:08Z
Check the source to verify that this is the current version before use.