[INCH-POUND]
A-A-55501E
3 August 2023
SUPERSEDING
A-A-55501D
22 May 2014

COMMERCIAL ITEM DESCRIPTION

RESISTOR, FIXED, ZERO OHM, 1/4 WATT

The General Services Administration has authorized the use of this Commercial Item Description for all federal agencies.

1. SCOPE. This Commercial Item Description (CID) covers the general requirements for axial leaded zero ohm resistors. Resistors covered by this CID are intended for commercial/industrial applications and are not used in military systems needing stringent environmental and electrical requirements.

2. CLASSIFICATION/PART OR IDENTIFICATION NUMBER (PIN). This CID uses a classification system which is included in the PIN as shown in the following example (see 7.1).

A-A-55501
|
|
CID number

3. SALIENT CHARACTERISTICS.

3.1 Interface and physical dimensions. Resistors supplied to this CID shall be as specified herein (see figure 1).

3.2 DC resistance. The resistance value shall not exceed 0.01 ohm.

3.3 Insulation resistance. The insulation resistance shall be 10,000 megohms.

3.4 Current rating. The current rating shall be 10 amperes maximum.

3.5 Dielectric withstanding voltage. The dielectric withstanding voltage shall be 450 volts minimum.

3.6 Pure tin. The use of pure tin, as an underplate or final finish is prohibited both internally and externally. Tin content of resistor components and solder shall not exceed 97 percent, by mass. Tin shall be alloyed with a minimum of 3 percent lead, by mass.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data that may improve this document should be sent to: DLA Land and Maritime, ATTN: VAT, P.O. Box 3990, Columbus, OH 43218-3990, or email Resistors@dla.mil. Since contact information can change, you may want to verify the currency of the address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited


FSC 5905

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:49Z
Check the source to verify that this is the current version before use.

3.7 Marking. Resistors supplied to this CID shall be marked with the manufacturer's (MFR's) standard commercial PIN (NOTE: The part number marked on the unit pack shall be the CID PIN)

3.8 Recycled, recovered, environmentally preferable, or biobased materials. Recycled, recovered, environmentally preferable, or biobased materials should be used to the maximum extent possible provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

3.9 Workmanship. Resistors shall be processed in such a manner as to be uniform in quality and shall be free from other defects that will affect life, serviceability, or appearance.

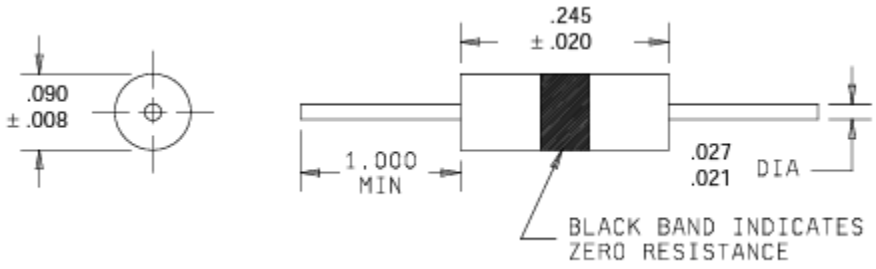

Inches	mm
0.008	0.20
0.020	0.51
0.021	0.53
0.027	0.69
0.090	2.29
0.245	6.22
1.000	25.4

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±0.005 inch (±0.13 mm).

FIGURE 1. Resistors, fixed, zero ohm.

4. REGULATORY REQUIREMENTS. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with 23.403 of the Federal Acquisition Regulation (FAR).

5. PRODUCT CONFORMANCE PROVISIONS.

5.1 Product conformance. The products provided shall meet the salient characteristics of this CID, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The Government reserves the right to require proof of such conformance.

6. PACKAGING. Preservation, packing, and marking shall be as specified in the contract or order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:49Z
Check the source to verify that this is the current version before use.

7. NOTES

7.1 PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See section 2 for PIN format example.

7.2 Commercial and Government Entity (CAGE) code. For ordering purposes, inventory control, and submission of these resistors to DLA Land and Maritime under the Parts Management Advisor Team (PMAT) evaluation program, CAGE code 58536 should be used.

7.3 Source of documents.

FEDERAL REGULATIONS

FAR 23.403 - Federal Acquisition Regulation (FAR) – Use of Recovered Materials and Biobased Products.

(Copies of these documents are available online at https://www.acquisition.gov/comp/far/index.html.)

7.4 Ordering data. The contract or order should specify the following:

a. CID document number, revision, and CID PIN.

b. Product conformance provisions.

c. Packaging requirements.

7.5 Commercial products. As part of the market analysis and research effort, this CID was coordinated with the following manufacturers of commercial products. At the time of CID preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:49Z
Check the source to verify that this is the current version before use.

MFR's CAGE	MFR's name and address
SQQ65	IRC Mexicali/TT Electronics AV. Circulo De La Amistad #IO2 Parque Industrial Mexicali IV, C.P. 21210, Mexicali B.C., MX Phone: +52 686-564-1300 Fax: +52 686-564-1381 Website: https://www.irc.com/
56637	RCD Components, INC. 520 East Industrial Park Drive Manchester, NH 03109-5316 Phone: (603) 669-0054 Fax: (603) 669-5455 Email: sales@rcdcomponents.com Website: https://www.rcdcomponents.com/

7.6 Part number (P/N) supersession data. This CID PIN supersedes the following MFR's P/N as shown. This information is being provided to assist in reducing proliferation in the Government inventory system.

TABLE I. P/N supersession data.

CID PIN	MRF's CAGE	MFR's P/N 1/	Vendor body color 2/	Vendor body style
A-A-55501	SQQ65	RG-1/4-zero ohm	Dark brown	Molded
	56637	ZJ2B Termination Q	Tan	Conformal coated

1/ The manufacturers P/N shall not be used for procurement to the requirements of this CID. At the time or preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements see 3.7.
2/ Body colors are for identification purposes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:49Z
Check the source to verify that this is the current version before use.

7.7 Government users. To acquire information on obtaining these resistors from the Government inventory system, contact DLA Land and Maritime, ATTN: CPB, Post Office Box 3990, Columbus, OH 43218-3990, or telephone (614) 692-7678.

7.7.1 National Stock Number. This section is not applicable to this CID.

7.8 Changes from previous issue. The margins of this CID are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

MILITARY INTERESTS:

Custodians:
Navy - EC
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FAS

Preparing activity:

DLA - CC

Project 5905-2023-030

NOTE: The activities listed above were interested in this document as the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:49Z
Check the source to verify that this is the current version before use.