
FED. SUP CLASS
5935

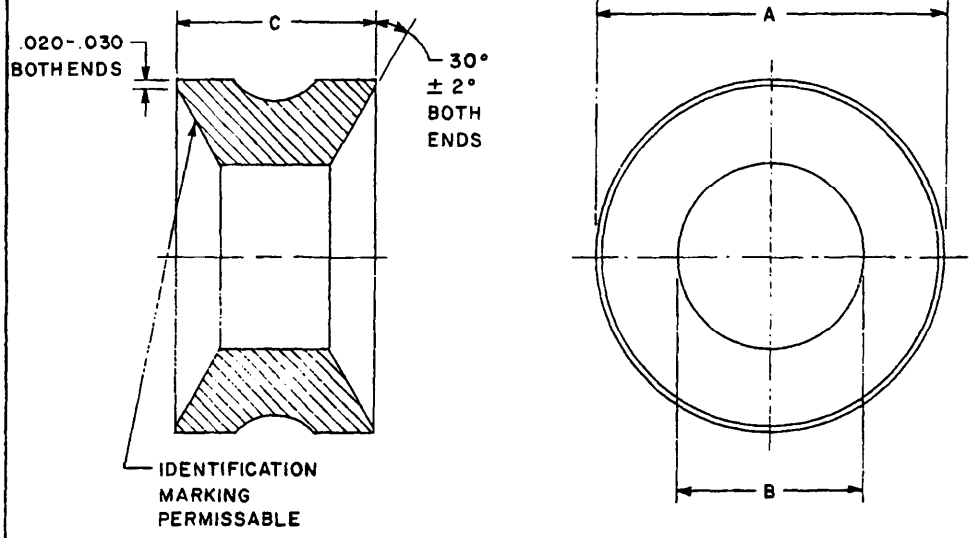

MS PART NUMBER	SHELL SIZE REF	A DIA +.000 −.020	B DIA +.020 −.000	C	MIN. CABLE DIA REF
MS -1	28	1.805	.969	1.034	.844
MS -2	28,32	↓	1.130	↓	1.005
MS -3	32	↓	1.260	↓	1.135
MS -4	40	2.427	1.609	1.222	1.484
MS -5	↓	↓	1.900	↓	1.775
MS -6	↓	↓	1.844	↓	1.719
MS -7	44	2.680	2.016	↓	1.871
MS -8	44	2.680	1.969	↓	1.824
MS -9	48	2.802	2.328	1.284	2.183
MS -10	48	2.802	2.250	1.284	2.105

NOTES:

1. DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCE IS ± .010.
2. MATERIAL IS SYNTHETIC RUBBER CONFORMING TO THE APPLICABLE REQUIREMENTS OF MIL-STD-417, GRADE SC 715 $A_1 B_1 E_3$ EXCEPT DUROMETER TO BE 75 ± 5.

APPROVED 13 October 1970 REVISED

P.A. EL Other Cust	TITLE GLAND, CABLE SEALING	MILITARY STANDARD MS 75099(EL)
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory for all activities. Selection for all new engineering and design applications must be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:28Z
Check the source to verify that this is the current version before use.