INCH-POUND

A-A-52186
June 30, 1994

COMMERCIAL ITEM DESCRIPTION

TABLES, FOOD PREPARATION, COMMISSARY STORES

The General Service Adminstration has authorized the use of this Commercial Item Description in preference to all sizes contained in MIL-T-43630 for all federal agencies.

1. SCOPE

1.1 Scope. This commercial item description covers food preparation tables for use in commissary stores in the following types and sizes (see 5.2):

Type I - Plastic top, stainless steel undershelf, 48 inches long by 24 inches wide by 36 inches high.

Type II - Stainless steel top, with 2 removable cutting boards and undershelf, 72 inches long by 36 inches wide by 36 inches high.

Style 1 - Square edge
Style 2 - With backsplash and tapered ends
Style 3 - With upper shelf
Style 4 - With upper wire rack for meat trays

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be used in improving this document should be addressed to: Commander, U.S. Army Natick Research, Development, and Engineering Center, ATTN: SATNC-WEE, Natick, A 01760-5018 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter

AMSC N/A

FSC 7320

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

1.2 CID based part identification number (PIN). A document based PIN to identify type and style of tables is included in section 5. This identication numbering procedure is for Government purposes and does not constitute a requirement for the contractor except as information on "Government unique" data nameplates (see 5.4).

2. SALIENT CHARACTERISTICS

2.1 Design and Construction.

2.1.1 Type I tables. Type I tables shall be 48 inches long by 24 inches wide by 36 inches high and shall consist of 4 legs, an undershelf, a stainless steel frame with bracing, and a plastic top. Legs shall be constructed of 16 gauge, 300 series stainless steel tubing, 1-5/8 inches in diameter. The lower end of each leg shall have an adjustable leveling device in conformance with NSF International Standard No. 2. The undershelf shall be located at 9 inches to 13 inches above the floor. The undershelf shall be a minimum of 16 gauge, 300 series stainless steel. The undershelf shall form a rigid support for the table legs. Legs and undershelf shall disassemble easily for shipping. The table top shall be 2 half-length pieces of 3/4 inch plastic material supported on all edges by the frame and shall be held in place on the frame by stainless steel tabs or clips. Two tabs or clips shall be provided on the outside on each end, front and back. Table top material shall conform to sanitation requirements of NSF International Standard No. 2. The tops shall be white or buff in color and with a minimum Shore D durometer hardness of 55 (see figure 1).

2.1.2 Type II tables. Type II tables shall be 72 inches long by 36 inches wide by 36 inches high. Table tops shall be stainless steel for the back 18 inches and plastic for the front 18 inches. Type II tables shall be of the same construction as type I. The front working section of the table top shall be 2 removable 36 inch by 18 inch by 3/4 inch thick plastic cutting boards held in place by stainless steel tabs or clips.

2.1.2.1 Style 1. Style 1 tables shall have square edges (see figure 3).

2.1.2.2 Style 2. Style 2 tables shall have a 14 inch high backsplash extending the full length of the back and half the width tapered towards the front of the table. The backsplash and table top section shall be fabricated of 14 gauge 300 series stainless steel. The backsplash and table top shall be fastened to the frame and the edges shall be turned or rolled for rigidity (see figure 2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

2.1.2.3 Style 3. Style 3 tables shall have a full removable shelf 10 inches wide with an 8 inch high back. The shelf shall be fabricated of 18 gauge 300 series stainless steel. The shelf shall have 2 vertical supports welded to the shelf and bolted to the table frame. There shall be a 19 inch space between the shelf and the table top surface which shall be rolled for rigidity (see figure 3).

2.1.2.4 Style 4. Style 4 tables shall be supplied with a storage rack the length of the table 12 inches deep, 32 inches high mounted 17 to 19 inches above the working surface. The rack shall be constructed of chrome plated or vinyl coated wire. A minimum of six adjustable vertical dividers shall be furnished to accommodate the various sizes of meat trays. A vinyl coated or chrome plate wire basket shall be suspended below the rack to store meat tray paper. The dimensions of the basket shall not be less than 30 inches wide, by 12 inches deep, by 4 inches high. The upper wire rack shall be supported by a stainless steel frame and shall be fastened to the rear of the table (see figure 4).

2.1.3 Standards Compliance. Tables and racks shall comply with the requirements of NSF International Standard No. 2 (see 3.4).

2.1.4 Data name plate (Government unique requirement) (See 5.4). The table shall be furnished with a data name plate in accordance with the applicable requirements of MIL-STD-130 except that the requirements for: (a) Methods of applying, (b) Identification tags, (c) Information not required, and (d) Optional marking information shall not apply. The data name plate shall be made of minimum 20 gauge (0.0355 inch) corrosion-resisting metal and attached to the table by rivets, screws, or by welding in such a manner as to meet the applicable NSF International sanitary requirements for this equipment. The plate shall contain the following information which may be stamped, engraved, or applied by photosensitive means:

National Stock Number
Procurement Contract Number
Specification Data
Manufacturer's Name, Address, and Telephone Number
(List only if different from Manufacturer)
Manufacturer's Model Number
Government Approved Manual Number (when specified, see 5.2).

Each plate shall be placed so it is readily visible to the user during normal use and so as to not adversely affect the life and utility of the table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

3. QUALITY ASSURANCE

3.1 Certification. The contractor shall certify, and maintain substantiating evidence, that the product offered meets the salient characteristics and requirements of this Commercial Item Description, and except for any Government unique requirement specified, conforms to the producer's own drawings, specifications, standards, and quality assurance practices, and is the same product offered for sale in the Commercial market place, or is the same product that has successfully been delivered to the Government on a previous contract or purchase order. The Goverment reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

3.2 Metric products. Product manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within specified tolerances using conversion tables contained in the latest revision of Federal Standard No. 376, and all other requirements of this Commercial Item Description are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable. The contracting officer has the option of accepting or rejecting the product.

3.3 Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

3.4 Compliance. Prior to approval of the first shipment, the contractor shall submit satisfactory evidence to the contracting officer or his authorized representative that the tables conform to the applicable requirements of NSF International Standard No.2.

3.4.1 NSF International standard compliance. Acceptable evidence of meeting the requirements of NSF International Standard No. 2 shall be a listing in the current edition of the NSF International "Listing of Food Service Equipment" and display of the NSF International mark on the finished product, or a certified test report from a recognized independent laboratory acceptable to the medical authority of the Government Agency purchasing the products indicating compliance with the applicable NSF International requirement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

4. PACKAGING

4.1 Packaging and packing. Packaging and packing shall be commercial or export as specified (see 5.2).

4.2 Commercial packaging and packing. Each table shall be cleaned, preserved, packaged, packed and unitized in accordance with ASTM D 3951.

4.3 Export packaging and packing.

4.3.1 Export packaging. Each table shall be disassembled to the extent determined by the manufactured to protect parts susceptible to damage during shipment and storage for the reduction of cubage. Disassembly shall be such that special skills or special tools, other than those furnished, are not required to place the table in use. Disassembled parts shall be identified. The table and disassembled parts shall be preserved and cushioned to provide adequate protection against corrosion, deterioration, and damage during shipping and storage. Disassembled and detached parts shall be packaged in a snug-fitting fiberboard box conforming to style optional, grade V3c, V3s, or V4s, of ASTM D 5118. Each box shall be closed in accordance with ASTM D 1974.

4.3.2 Export packing. Each table (together with detached components) shall be packed in a shipping container conforming to domestic type, style A or B of PPP-B-601. The contents of each shipping container shall be cushioned, blocked, and braced to prevent damage. Closure and strapping shall be in accordance with PPP-B-601.

4.4 Marking (commercial and export). Interior boxes and shipping containers shall be marked in accordance with MIL-STD-129, or ASTM D 3951, as applicable.

5. NOTES

5.1 Intended use. Type I tables are intended for use in the preparation of food in commissary stores. Type II tables are primarily intended for meat boning and trimming.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

5.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this commercial item description.
b. Type and style of table required (see 1.1).
c. The Government approved manual number is to be included on the data name plate when manuals are purchased under the contract (see 2.1.4).
d. Type of packaging and packing required (see 4.1).

5.3 Sources for documents.

5.3.1 Sources for non-Government association documents.

ASTM D 1974 - Methods of Closing, Sealing, and Reinforcing Fiberboard Shipping Containers
ASTM D 3951 - Standard Practice for Commercial Packaging
ASTM D 5118 - Fabrication of Fiberboard Shipping Boxes,
these methods are available from:

The American Society for Testing and Materials (ASTM)
1916 Race Street
Philadelphia, PA 19103-1187

NSF International Standard No. 2 - Food Service Equipment, is available from:

NSF International
3475 Plymouth Road
P.O. Box 130140
Ann Arbor, MI 48113-0140

5.3.2 Source for Government documents. Copies of military and federal documents are available from:


Standardization Documents Order Desk
Building 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

5.4 Government unique requirements. Whenever a "Government unique" requirement is included in the title of a paragraph under "Salient "Characteristics", it is meant that the requirement is something that is not normally offered to the commercial marketplace by the manufacturer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

5.5 Part identification number (PIN). The PIN's to be used for tables acquired by this CID are created as follows:

A 52186 -II -3 (Example of PIN: A52186-II-3)

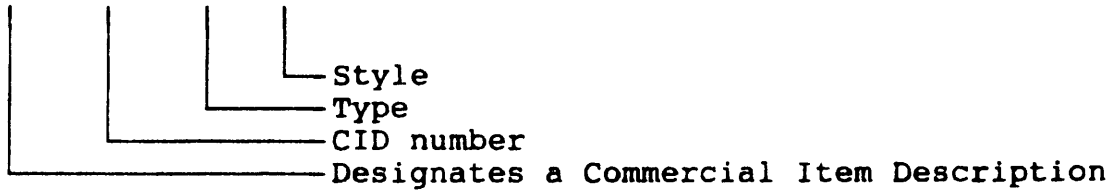

5.6 Sources of supply. Manufacturers whose products are known to meet the CID requirement are as listed below. However, competition is not limited to these companies:

C.T.I. Inc.
26 Chestnut Street
Andover, MA 01810

Marlo Manufacturing Co.

140 Fifth Avenue
Hawthorne, NJ 07506

Stancase Equipment Co.
60 Amity Street
Jersey City, NJ 07304

MILITARY INTERESTS:
ACTIVITY:

Custodians

Army - GL
Air Force - 99

Review Activities

Army - MD
Air Force - 35, 82, 84
DLA - GS

CIVIL AGENCY COORDINATING

GSA - FSS

PREPARING ACTIVITY:

Army - GL

(Project 7320-0869)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

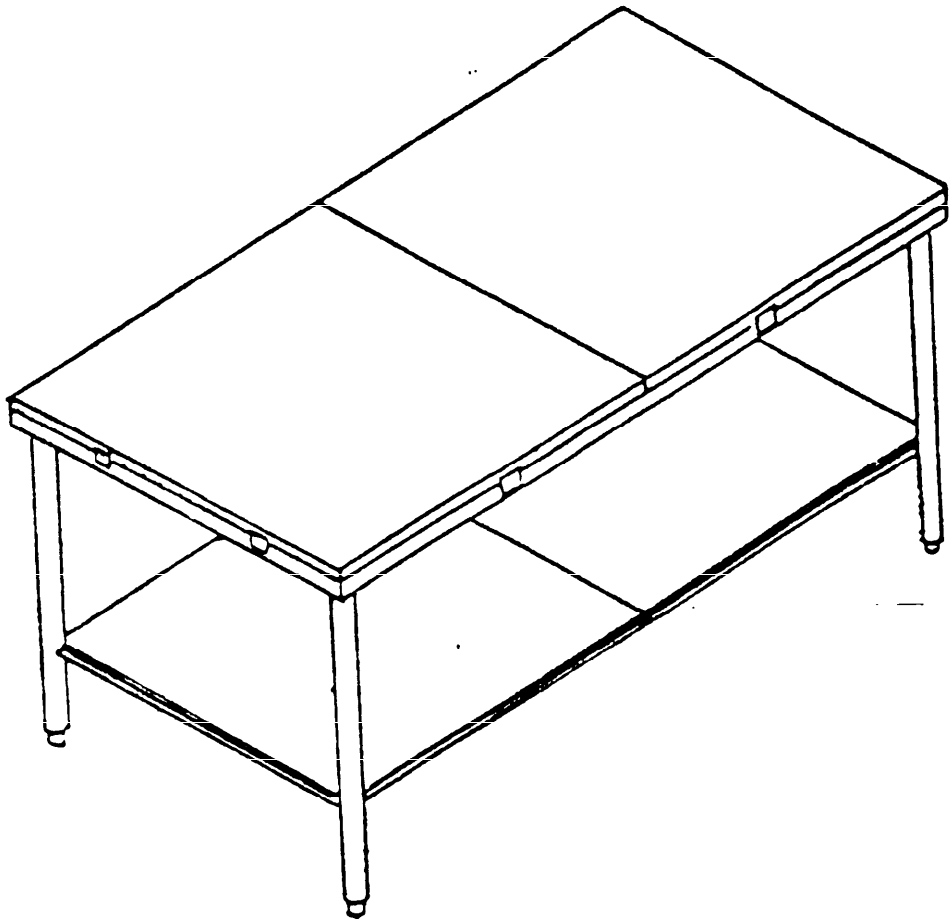


FIGURE 1- TYPE I

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

EXTERIOR SHIPPING CONTAINERS SHALL BE [illegible]

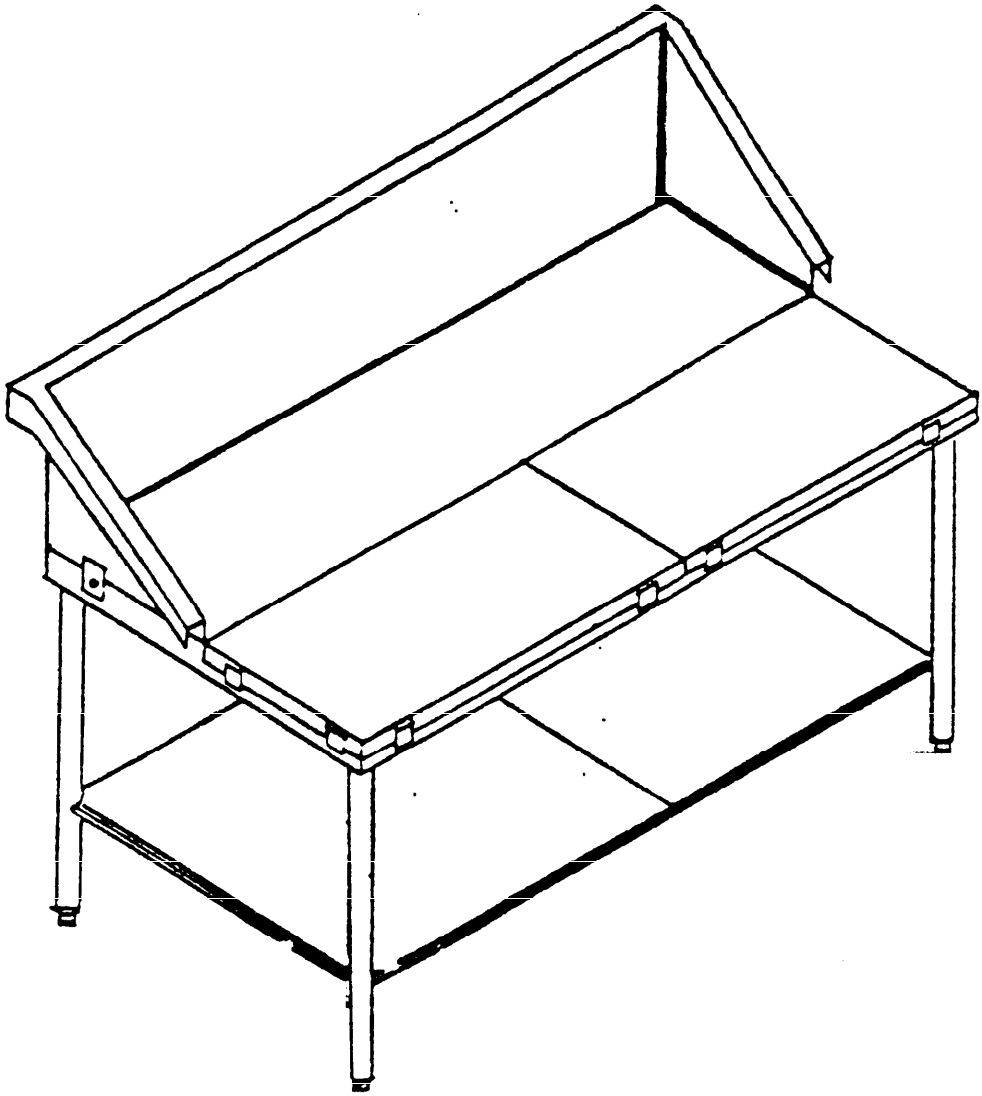


FIGURE 2 - TYPE II, STYLE 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

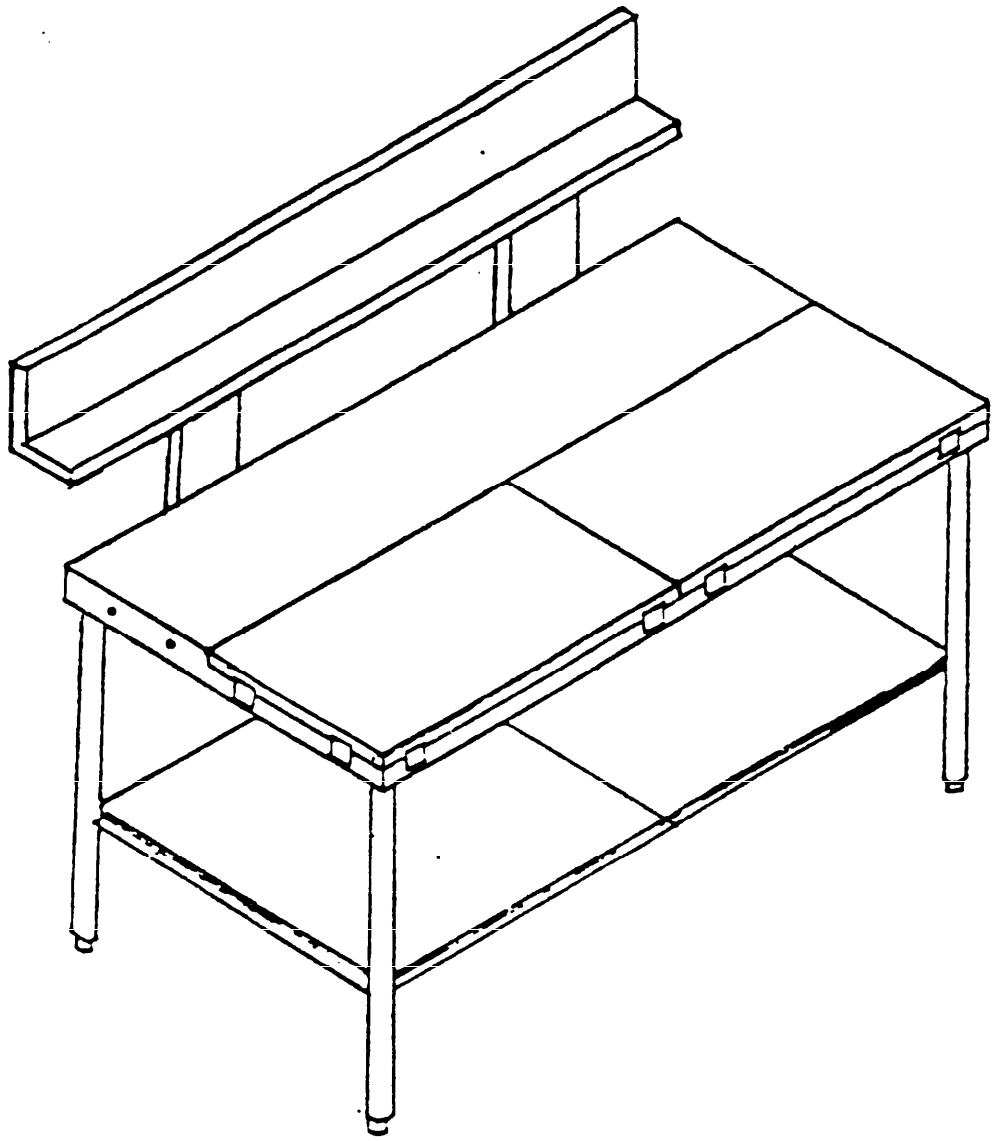


FIGURE 3 - TYPE II, STYLE 3*

*TYPE II, STYLE 1 SIMILAR TO STYLE 3 EXCEPT FOR SHELF

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

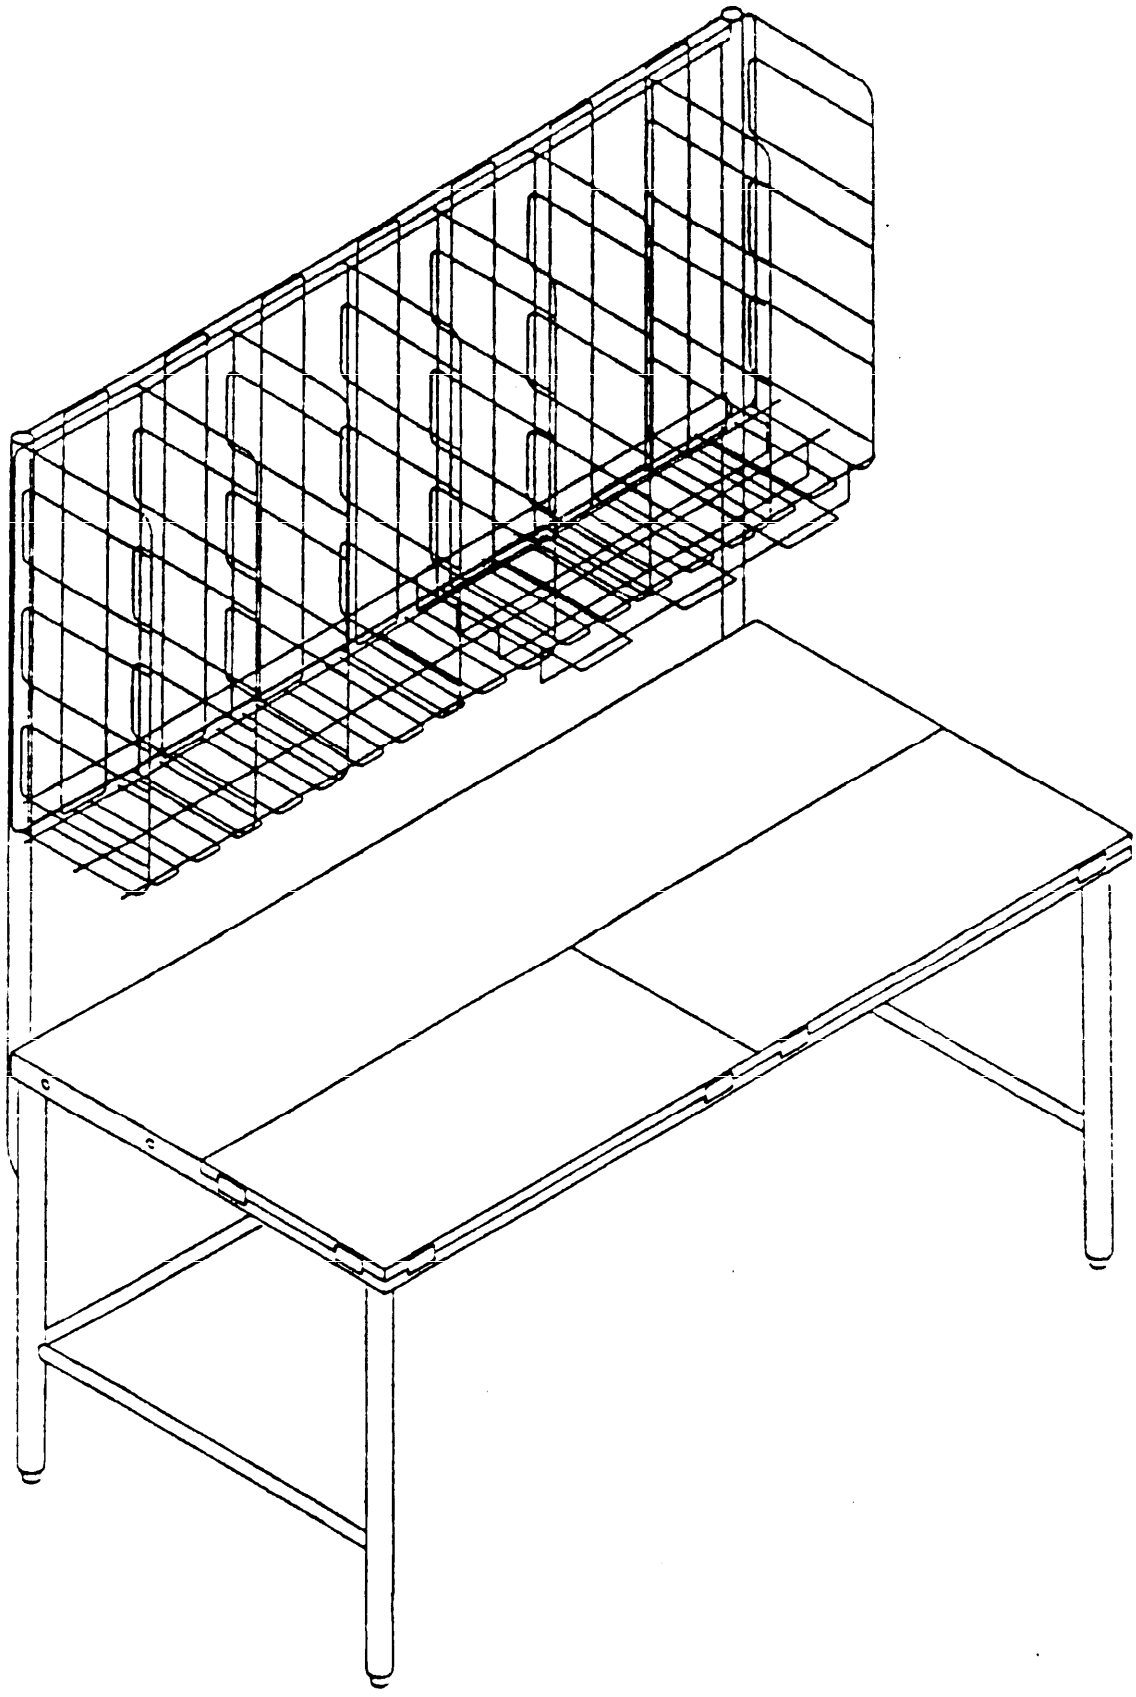


FIGURE 4 – TYPE II, STYLE 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	A-A-52186	94-06-30

3. DOCUMENT TITLE
TABLES, FOOD PREPARATION, COMMISSARY STORES

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial	(2) AUTOVON/DSN
U.S. Army Natick RD&E Center	508-651-5175	256-5175
c. ADDRESS (Include Zip Code) Commander, U.S. Army Natick RD&E Center ATTN: SATNC-WEE Natick, MA 01760-5018	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil - Downloaded: 2026-04-26T09:07Z
Check the source to verify that this is the current version before use.