DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

USER ACTIVITIES:
ARMY - ME

REVIEWER ACTIVITIES:
ARMY - AT, AV, EA, ER
NAVY - YD
AIR FORCE - 11
DLA - IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

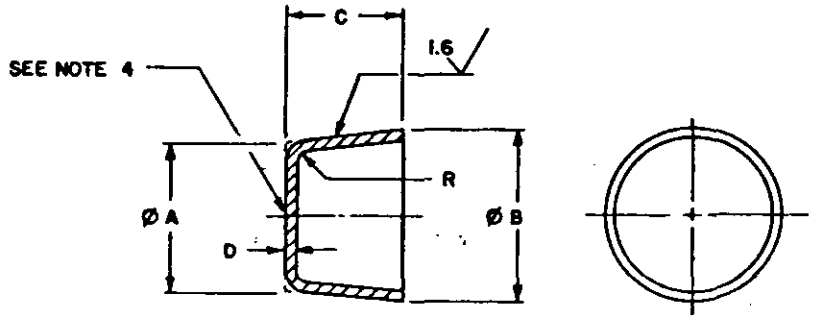


TABLE I. DASH NUMBERS AND DIMENSIONS.

DASH NO	NOMINAL PLUG DIAMETER	Ø A		Ø B		C	D	R
		MAX	MIN	MAX	MIN			±0.1
08	8	8.20	8.11	8.30	8.21	3 ±0.300	0.75	1.0
10	10	10.20	10.09	10.30	10.19	3 ±0.300	0.75	1.0
12	12	12.20	12.09	12.30	12.19	4 ±0.375	1.00	1.0
14	14	14.20	14.09	14.30	14.19	5 ±0.375	1.00	1.0
16	16	16.30	16.19	16.50	16.39	5 ±0.375	1.00	1.0
18	18	18.30	17.90	18.50	18.37	6 ±0.375	1.00	1.0
20	20	20.30	20.17	20.50	20.37	6 ±0.375	1.00	1.0
22	22	22.30	22.17	22.50	22.37	7 ±0.450	1.60	2.0
25	25	25.30	25.17	25.50	25.37	8 ±0.450	1.60	2.0
28	28	28.30	28.17	28.50	28.37	9 ±0.450	1.60	2.0
30	30	30.30	30.14	30.50	30.34	10 ±0.450	1.60	2.0
35	35	35.30	35.14	35.50	35.34	11 ±0.550	1.60	2.0
40	40	40.30	40.14	40.50	40.34	12 ±0.550	1.60	2.0
45	45	45.30	45.14	45.50	45.34	14 ±0.550	1.60	2.0
50	50	50.30	50.11	50.50	50.31	15 ±0.550	1.60	2.0
55	55	55.30	55.11	55.50	55.31	17 ±0.550	2.00	2.5
60	60	60.30	60.11	60.50	60.31	19 ±0.650	2.00	2.5
70	70	70.30	70.11	70.50	70.31	20 ±0.650	2.00	2.5
80	80	80.30	80.08	80.50	80.28	20 ±0.650	2.00	2.5
90	90	90.40	90.18	90.70	90.48	20 ±0.650	2.00	2.5
100	100	100.40	100.18	100.70	100.48	20 ±0.650	2.00	2.5

Ⓐ CANCELED AS OF 18 DECEMBER 1987

METRIC

APPROVED 1 Mar 84 REVISED Ⓐ 18 Dec 87

P.A. Other Cust 11 YD	INTERNATIONAL INTEREST	TITLE: PLUG, EXPANSION, TAPERED METRIC	MILITARY STANDARD DS21445
PROCUREMENT SPECIFICATION: NONE	SUPERSEDES:		PAGE 1 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:39Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5340

REQUIREMENTS:

1. MATERIAL SHALL BE STEEL IN ACCORDANCE WITH ASTM A109-81
2. FINISH SHALL BE BLACK OXIDE IN ACCORDANCE WITH AMS 2485D-82
3. THE SURFACE TEXTURE SHALL BE 3.2 μm, UNLESS OTHERWISE SPECIFIED, WHEN TESTED IN ACCORDANCE WITH ANSI B46.1 - 1978.
4. PART NUMBER. THE PART NUMBER CONSISTS OF THE BASIC DS SHEET NUMBER FOLLOWED BY A DASH NUMBER TAKEN FROM TABLE I.

EXAMPLE: DS21445-08

- 08 — DASH NUMBER
- DS21445 — BASIC DS SHEET NUMBER

DS21445-08 INDICATES - PLUG, EXPANSION, 8 mm NOMINAL PLUG DIAMETER

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. BREAK ALL BURRS AND SHARP EDGES (0.4 mm MAX).
3. DO NOT USE UNASSIGNED PART NUMBERS.
4. MARK "E10" ON DASH NUMBERS 08 THRU 18, DASH NO. 20 THRU 100 MARK WITH FULL PART NUMBER AND MANUFACTURER'S IDENTIFICATION. MARKING SHALL BE IN ACCORDANCE WITH AS 478C-79 METHOD 6 OR 7A.
5. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
6. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS OR REQUEST FOR PROPOSAL EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.

USER ACTIVITIES:
ARMY - ME

REVIEWER ACTIVITIES:
ARMY - AT, AV, EA, ER
NAVY - YD
AIR FORCE - 11
DLA - IS

APPROVED 1 Mar 84 REVISED

P.A.: Other Cust	11 YD	INTERNATIONAL INTEREST	TITLE: PLUG, EXPANSION, TAPERED METRIC	MILITARY STANDARD DS21445
PROCUREMENT SPECIFICATION: NONE		SUPERSEDES:		PAGE 2 OF 2

DD FORM 1 MAY 72 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5340-1509

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:39Z
Check the source to verify that this is the current version before use.