
FED. SUP CLASS.
1650

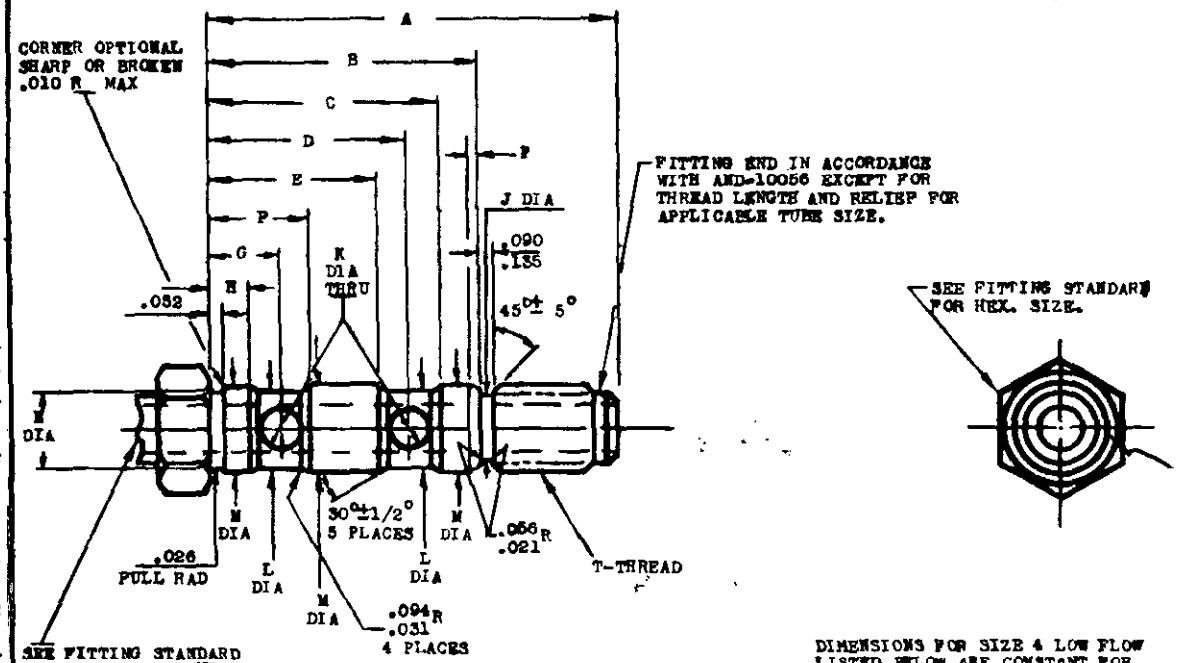

DIMENSIONS FOR SIZE 4 LOW FLOW LISTED BELOW ARE CONSTANT FOR ALL LOW FLOW FITTINGS.

SIZE	TUBE O.D.	THREAD T (REF)	A	B	C	D	E	F	G	H	J ±.005	K ±.003
LOW FLOW 4	1/4	7/16-20 UNF-3A	3.162	2.094	1.726	1.540	1.354	.726	.540	.354	.363	.189
HIGH FLOW 4	1/4	7/16-20 UNF-3A	3.737	2.469	2.077	1.820	1.563	.891	.634	.377	.363	.300
HIGH FLOW 5	5/16	1/2-20 UNF-3A	3.737	2.469	2.077	1.820	1.563	.891	.634	.377	.425	.300
HIGH FLOW 6	3/8	9/16-18 UNF-3A	3.737	2.469	2.077	1.820	1.563	.891	.634	.377	.480	.300
HIGH FLOW 8	1/2	3/4-16 UNF-3A	3.737	2.469	2.077	1.820	1.563	.891	.634	.377	.559	.300

SIZE	TUBE O.D.	THREAD T (REF)	± L .005	± M .0004	N	P
LOW FLOW 4	1/4	7/16-20 UNF-3A	.433	.4969	.425	.060
HIGH FLOW 4	1/4	7/16-20 UNF-3A	.740	.8114	.738	.065
HIGH FLOW 5	5/16	1/2-20 UNF-3A	.740	.8114	.738	.065
HIGH FLOW 6	3/8	9/16-18 UNF-3A	.740	.8114	.738	.065
HIGH FLOW 8	1/2	3/4-16 UNF-3A	.740	.8114	.738	.065

(A)

CANCELLED AFTER 14 JUNE 1979
NO SUPERSEDING STANDARD

THIS DOCUMENT HAS BEEN PROMULGATED BY THE DEPARTMENT OF DEFENSE AS THE MILITARY STANDARD TO LIMIT THE SELECTION OF THE ITEM, PRODUCT, OR DESIGN COVERED HEREIN IN ENGINEERING, DESIGN, AND PROCUREMENT. THIS STANDARD SHALL BECOME EFFECTIVE NOT LATER THAN 90 DAYS AFTER THE LATEST DATE OF APPROVAL SHOWN. THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

ALL OUTSIDE MACHINED SURFACES FINISHED TO 125 R.M.S. MAX. EXCEPT AS NOTED.
ALL INSIDE MACHINED SURFACES FINISHED TO 250 R.M.S. MAX. EXCEPT AS NOTED.
"M" MACHINED SURFACES FINISHED TO 16 R.M.S. MAX. AND CONCENTRIC TO EACH OTHER WITHIN .0005 FULL INDICATOR READING.
"L" AND "M" DIA'S. AND THR'D. MUST BE CONCENTRIC WITH .005 FULL INDICATOR READING.

FITTINGS SHALL BE FREE FROM ALL RANGING BURRS AND SLIVERS WHICH MIGHT BECOME DISLODGED UNDER USAGE.
DIMENSIONS IN INCHES: TOLERANCE ±.010 UNLESS OTHERWISE SPECIFIED. ANGLES ±1/2° UNLESS OTHERWISE SPECIFIED.

THIS IS A DESIGN STANDARD. NOT USED AS A PART NUMBER.

APPROVED 15 FEB 1956 REVISED(A) 3 Aug 79

CUSTODIANS	MILITARY STANDARD	MS 21948 (AER)
Navy - BuAer	FITTING END - BOLT CLUSTER FITTING DOUBLE PORT THROUGH - FLARE	
PROCUREMENT SPECIFICATION NONE		SHEET 1 OF 1

NOTICE: When G...ment drawings, specifications, or other dat... e used for any purpose other than in connection with a definitely related Government procure...t operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:42Z
Check the source to verify that this is the current version before use.