
MS9379 (ASG)

FED SUP CLASS 5340

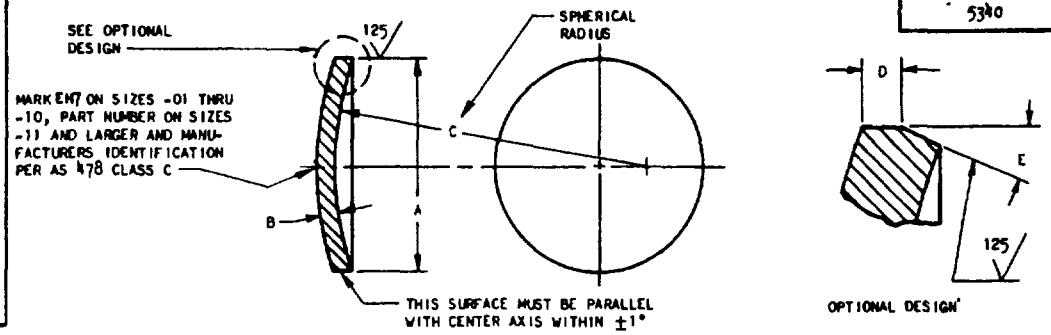

PART NUMBER	NOMINAL SIZE	A DIA	B ± 005	C ± 016	D ±.010	E ±1°	APPROX WT LB/100
MS9379-01	188	186- 189	025	172	—	32	02
MS9379-02	250	248- 252	032	.219	—	32	04
MS9379-03	312	310- 315	063	266	033	32	14
MS9379-04	375	372- 377	063	406	033	25	19
MS9379-05	438	435- 440	063	469	033	25	27
MS9379-06	500	497- 502	063	531	033	25	35
MS9379-07	562	560- 565	063	625	033	25	45
MS9379-08	625	622- 628	063	750	033	23	55
MS9379-09	688	684-.690	063	875	.033	23	66
MS9379-10	750	747- 753	063	938	033	23	79
MS9379-11	812	809- 815	063	1 031	033	23	93
MS9379-12	875	872- 878	080	1.094	042	23	1 36
MS9379-13	938	934- 940	080	1 156	042	24	1 56
MS9379-14	1 000	997-1 003	080	1 188	042	24	1 77
MS9379-15	1 031	1 028-1 034	080	1 250	042	24	1 89
MS9379-16	1 062	1 059-1 065	080	1 250	042	24	2.00
MS9379-17	1 125	1 122-1 128	080	1 375	042	24	2.26
MS9379-18	1 188	1 184-1.190	080	1 500	042	24	2 50
MS9379-19	1 250	1 247-1 253	.080	1 625	042	21	2 78
MS9379-20	1 312	1 307-1 317	080	1 750	042	21	3 06
MS9379-21	1 375	1 370-1 380	080	1 812	042	21	3 35
MS9379-22	1 438	1 432-1 442	080	2 000	042	21	3 68
MS9379-23	1 500	1 495-1 505	080	2 125	042	21	4 00
MS9379-24	1 562	1 558-1 568	080	2 250	042	21	4 35
MS9379-25	1 625	1 620-1 630	080	2 375	042	21	4.69
MS9379-26	1 688	1 683-1 693	080	2 500	042	19	5 05
MS9379-27	1 750	1 745-1 755	080	2.688	042	19	5 45
MS9379-28	1 812	1 807-1 817	080	2 750	042	19	5 84
MS9379-29	1 875	1 870-1 880	080	2 875	042	19	6 25
MS9379-30	1 938	1 932-1 942	080	3 094	042	19	6 67
MS9379-31	2 000	1 995-2 005	080	3 188	042	19	7 11
MS9379-32	2 062	2 057-2 067	080	3 188	042	19	7 56
MS9379-33	2 125	2 120-2 130	080	3 250	042	19	8 04
MS9379-34	2 250	2 245-2 255	080	3 562	042	19	9 00
MS9379-35	2 375	2 370-2 380	080	3 875	042	19	10 00
MS9379-36	2 500	2 495-2 505	080	4 156	042	17	11 08
MS9379-37	2 625	2 620-2 630	080	4 250	042	17	12.71
MS9379-38	2 750	2 745-2 755	080	4 500	042	17	13 43
MS9379-39	2 875	2 870-2 880	080	4 750	042	17	14 66
MS9379-40	3 000	2.995-3 005	080	5 000	042	17	16 00
MS9379-41	3 188	3.182-3 192	080	5 500	042	17	18 00
MS9379-42	3 250	3 245-3 255	140	5.500	.067	17	30 10
MS9379-43	3 500	3 495-3 505	140	6 000	067	17	35.00
MS9379-44	3 750	3 745-3 755	140	6 000	067	17	40 00

1. MATERIAL CORROSION RESISTANT STEEL AMS 5510
2. MATERIAL CODE EM7 PER AS 269
3. SURFACE ROUGHNESS AS 291
4. REMOVE BURRS AND SHARP EDGES
5. DIMENSIONS IN INCHES
6. DO NOT USE UNASSIGNED PART NUMBERS

AMS AND AS ARE SAE PUBLICATIONS
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE

APPROVED 2 Feb 62 REVISED

P A USAF - AFSC Other Cust Navy - Nap	TITLE PLUG, EXPANSION - AMS 5510	MILITARY STANDARD MS9379 (ASG)
PROCUREMENT SPECIFICATION None	SUPERSEDES	SHEET 1 OF 1

DD FORM NO. 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT E25-90-1

NOTICE — When Government drawings specifications or other data are used for any purpose other than in connection with a definitely related Government procurement operation the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated furnished or in any way supplied the said drawings specifications or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation or conveying any rights or permission to manufacture use or sell any patented invention that may in any way be related thereto

This standard has been approved by the Department of the and is mandatory for use by that activity All other military activities are required to employ this standard where suitable

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:15Z
Check the source to verify that this is the current version before use.