MILITARY SPECIFICATION SHEET

FLANGES, WAVEGUIDE (COVER) (SQUARE, 4 HOLE, BUTT MOUNT)

This specification is approved for use by all Departments and Agencies of the Department of Defense

The complete requirements for procuring the flanges described herein shall consist of this document and the latest issue of Specification MIL-F-3922.

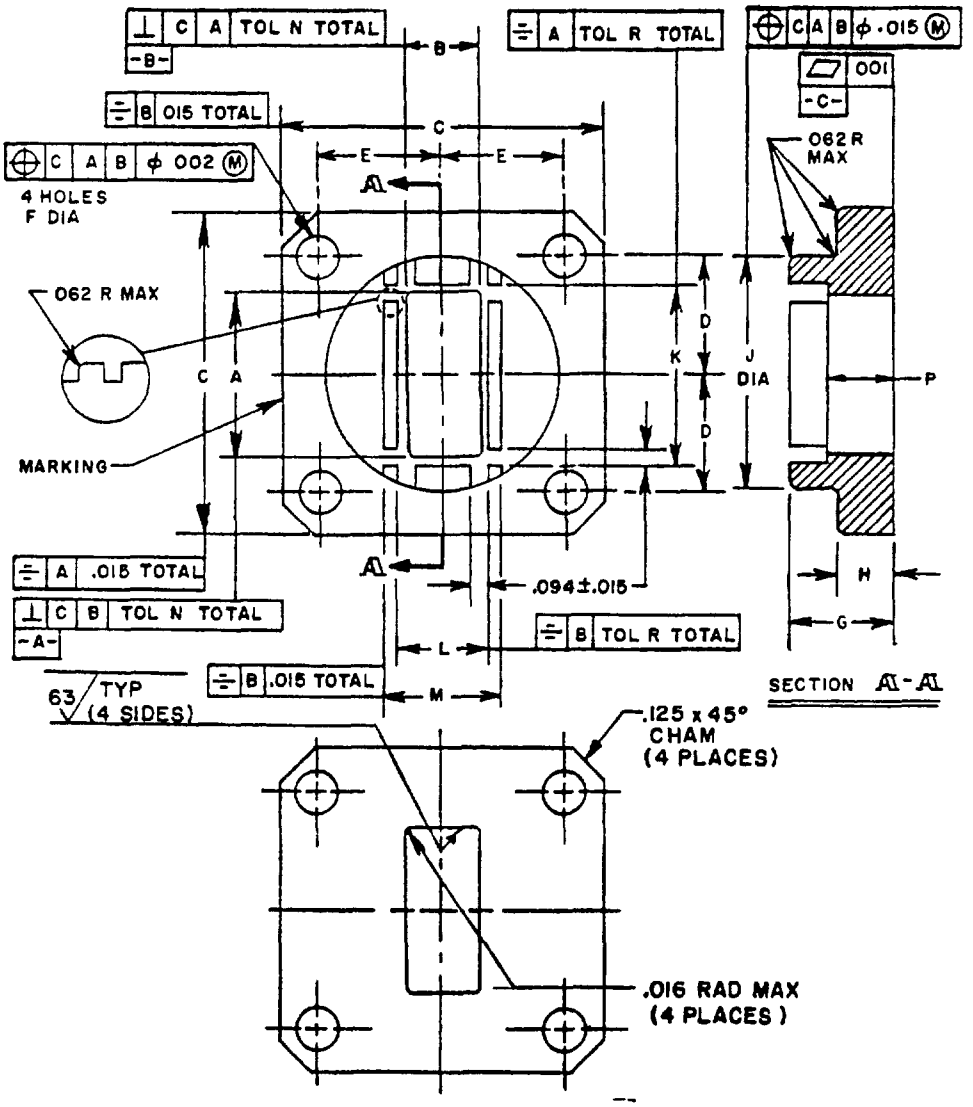


FIGURE 1. Flange configuration

FSC 5985

Source: https://assist.dla.mil -- Downloaded: 202610-16T22:09Z
Check the source to verify that this is the currentversion before use.

INCHES	MM
.001	.03
.002	.05
.015	.38
.016	.41
.062	1.57
.094	2.39
.125	3.18

NOTES
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Roughness of mating surfaces shall not exceed 63 microinches in accordance with ANSI - B46.1 - 1962, except that flaws shall be included in the roughness height measurement.
4 End item offered shall be of single-piece construction.

FIGURE 1. Flange configuration - Continued

Source: https://assist.dla.mil -- Downloaded: 202610-16T22:09Z
Check the source to verify that this is the current version before use.

TABLE I Dash numbers and dimensions.

Part No. M3922/70-						Dimensions 1/ 2/ 3/	
	Used with			Used with			
Dash No 4/	Waveguide MB5/1-	Flange M3922/	Dash No 5/	Waveguide MB5/1	Flange M3922/	A	B
001	155 156	69-001	002	157,158 160	69-002, 69-003	1.020 ±.003 (25.91) (.08)	.510 ±.003 (12 95) (.08)
004	081 085	59-010	005	083,084, 179	59-011	.750 ± 003 (19.05) (08)	375 ±.003 (9 52) (08)
007	087,089, 093	59-001	008	090,091 180	59-002	.622 ±.002 (15.80) (.05)	.311 ±.002 (7.90) (05)
010	094 076	69-004	011	097,098, 181	69-005, 69-006	.510 ±.002 (12.95) (.05)	.255 ±.002 (6 48) (.05)
013	155 156	69-001	014	157,158, 160	69-002, 69-003	1.020 ± 003 (25 91) (.08)	510 ±.003 (12 95) (.08)
016	081 085	59-010	017	083,084, 179	59-011	.750 ± 003 (19.05) (.08)	.375 ±.003 (9.52) (08)
019	087,089, 093	59-001	020	090,091, 180	59-002	.622 ±.002 (15 80) (.05)	.311 ±.002 (7 90) (.05)
022	094 096	69-004	023	097,098, 181	69-005, 69-006	510 ±.002 (12.95) (.05)	255 ± 002 (6 48) (.05)
025	081 085	59-010	026	083,084 179	59-011	.750 ±.003 (19.05) (08)	.375 ±.003 (9.52) (.08)
027	100,102, 106	59-003	028	103,104, 182	59-004	.420 ± 002 (10.67) (05)	170 ± 002 (4 32) (05)

Source: https://assist.dla.mil -- Downloaded: 202640-16T22:09Z
Check the source to verify that this is the current version before use.

025	026	1.500 (38.10)	.520 (13.21)	.561 (14.25)	.144 (3.66)	.406 (10.31)	.203 (5 16)	1 156 (29.36)
027	028	.875 (22.22)	.320 (8 13)	.335 (8.51)	.116 (2.95)	.285 (7.24)	.156 (3.96)	.625 (15.88)

Source: https://assist.dla.mil -- Downloaded: 202610-16T22:09Z
Check the source to verify that this is the current version before use.

		(27.05) +.000	(12.14) +.000	(29.38)	(.08)	(4.76)	(.03)
007	008	.705 +.002 (17.91) -.000	.394 +.002 (10.01) -.000	1.000 (25.40)	.002 (.05)	.188 (4.78)	.001 (.03)
010	011	.593 +.002 (15.06) -.000	.338 +.002 (8.59) -.000	1.000 (25.40)	.002 (.05)	.250 (6.35)	.001 (.03)
013	014	1.151 +.003 (29.24) -.000	.641 +.003 (16.28) -.000	.875 (22.22)	.003 (.08)	.375 (9.52)	.002 (.05)
016	017	.853 +.003 (21.67) -.000	.478 +.003 (12.14) -.000	1.156 (29.36)	.003 (.08)	.281 (7.14)	.002 (.05)
019	020	.705 +.002 (17.91) -.000	.394 +.002 (10.01) -.000	1.000 (25.40)	.002 (.05)	.250 (6.35)	.001 (.03)
022	023	.593 +.002 (15.06) -.000	.338 +.002 (8.59) -.000	1.000 (25.40)	.002 (.05)	.250 (6.35)	.001 (.03)
025	026	.853 +.003 (21.67) -.000	.478 +.003 (12.14) -.000	1.156 (29.36)	.003 (.08)	.281 (7.14)	.002 (.05)
027	028	.503 +.002 (12.78) -.000	.253 +.002 (6.43) -.000	.625 (15.88)	.002 (.05)	.160 (4.06)	.001 (.03)

1/ Dimensions are in inches.
2/ Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm
3/ Metric equivalents are in parentheses.
4/ Material shall be copper alloy.
5/ Material shall be aluminum alloy.

Source: https://assist.dla.mil -- Downloaded: 202610-16T22:09Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:
Dimensions and configuration: See figure 1 and table I.
Material. Metallic alloy as specified in table I.
Marking: See figure 1.
Part number M3922/70 - (dash number from table I).

Cross reference and engineering information: See table II.

TABLE II. Cross reference and engineering information.

Part number M3922/70-	AN nomenclature	Frequency range (GHz)
001	UG-1493/U	7.0 - 11.0
002, 013, 014	---	7.0 - 11.0
004, 005, 016, 017, 025, 026	---	10.0 - 15.0
007, 008, 019, 020	---	12.4 - 18.0
010, 011, 022, 023	---	15.0 - 22.0
027, 028	---	18.0 - 26.5

NOTE: Dash numbers 003, 006, 009, 012, 015, 018, 021 and 024 have been replaced by dash numbers 002, 005, 008, 011, 014, 017, 020, and 023, respectively. A separate part number for parts constructed from aluminum alloy 6063 is no longer required

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities
Army -
Navy - OS
Air Force - 11, 99
DLA - ES

User activities
Army -
Navy - AS, MC, SH
Air Force -

Preparing activity
Navy - EC

Agent
DLA - ES

(Project 5985-0873)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:09Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONIC SYSTEMS COMMAND
WASHINGTON, D.C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT
DOD 316

OFFICAL BUSINESS

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:09Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No 22 R255

INSTRUCTIONS The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3 IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes" in what way?)*

4 REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:09Z
Check the source to verify that this is the current version before use.