
INCH-POUND
MIL-C-22249/45C(SH)
29 September 1989
SUPERSEDING
MIL-C-22249/45B(SH)
15 August 1977

MILITARY SPECIFICATION SHEET

CONNECTOR SETS, SPANNER WRENCH, FOR 3-, 6-, 12-, and 19-PIN PLUG, MISSILE SIDE

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation: MIL-C-22249(SH).

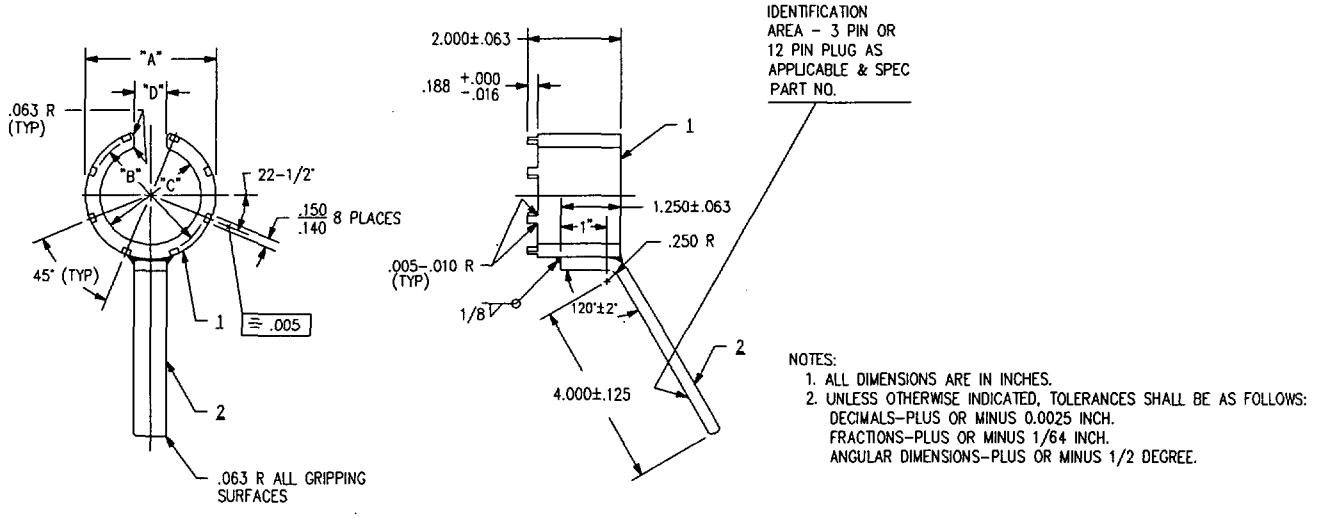

NOTES:
1. ALL DIMENSIONS ARE IN INCHES.
2. UNLESS OTHERWISE INDICATED, TOLERANCES SHALL BE AS FOLLOWS:
   DECIMALS-PLUS OR MINUS 0.0025 INCH.
   FRACTIONS-PLUS OR MINUS 1/64 INCH.
   ANGULAR DIMENSIONS-PLUS OR MINUS 1/2 DEGREE.

NOTE:
TOLERANCES ON ALL DIMENSIONS ±.020

WRENCH DATA					
PART NO.	PIN SIZE & QTY	DIM "A"	DIM "B"	DIM "C"	DIM "D"
M22249/45-1	3 #16	1.625	1.396	1.317	.313
M22249/45-3	12 #16	2.385	2.156	1.942	.625


MARK NO.S FOR SPANNER WRENCH					
MK NO.	NO. REQ'D	MATL	MATL SPEC	DESCRIPTION	REMARKS
1	1	STEEL	QQ-S-741 (A-36)		
2	1	STEEL	QQ-S-741 (A-36)	.250 x .750 F.B.	

FIGURE 1. Spanner wrench, 3- and 12-pin plug. (01)

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:42Z
Check the source to verify that this is the current version before use.

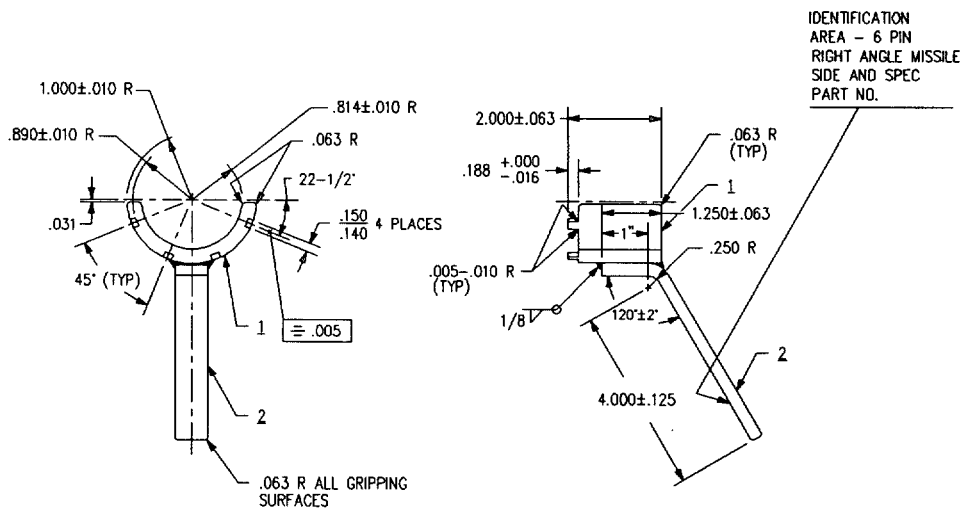

MARK NO.S FOR SPANNER WRENCH					
MK. NO.	NO. REQ'D	MATL	MATL SPEC	DESCRIPTION	REMARKS
1	1	STEEL	QQ-S-741 (A-36)		
2	1	STEEL	QQ-S-741 (A-36)	.250 x .750 F.B.	

FIGURE 2. Spanner wrench for 6-pin, right angle plug-missile side M22249/45-5. 05

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:42Z
Check the source to verify that this is the current version before use.

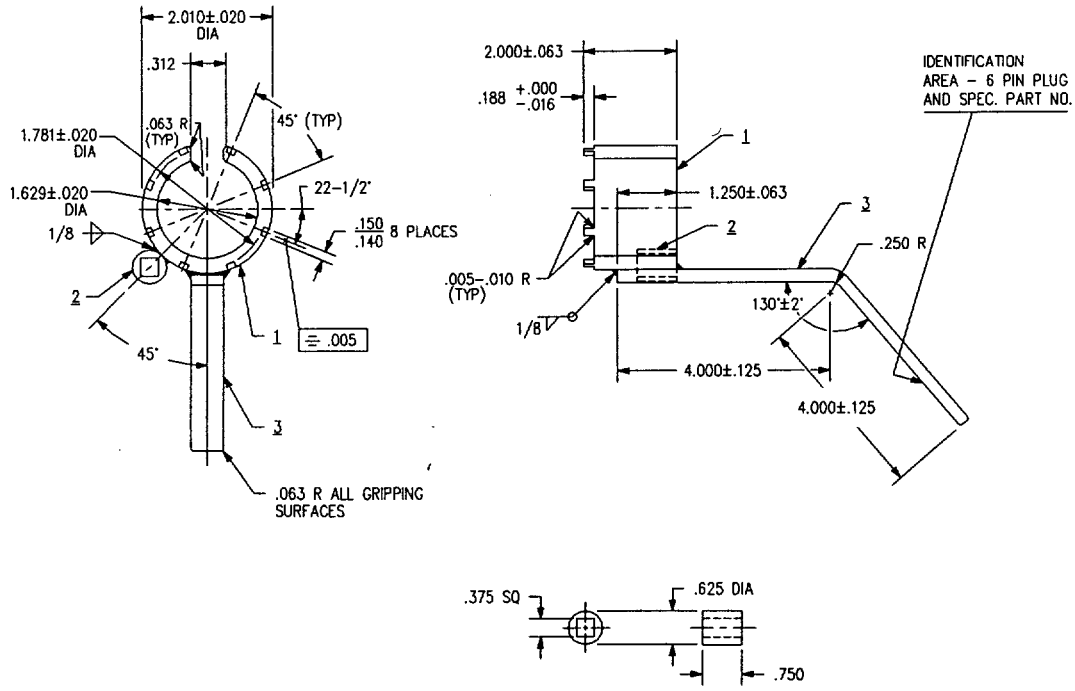


MK-2 DETAIL

MARK NO.S FOR SPANNER WRENCH					
MK NO.	NO. REQ'D	MATL	MATL SPEC	DESCRIPTION	REMARKS
1	1	STEEL	QQ-S-741 (A-36)	* (SEAMLESS TUBING ASTM A519)	CAN BE MADE FROM TUBING *
2	1	STEEL	QQ-S-741 (A-36)		3/8 SOCKET DRIVE CAN BE USED
3	1	STEEL	QQ-S-741 (A-36)	.250 x .750 F.B.	

FIGURE 3. Spanner wrench for 6-pin, missile side M22249/45-2. (02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:42Z
Check the source to verify that this is the current version before use.

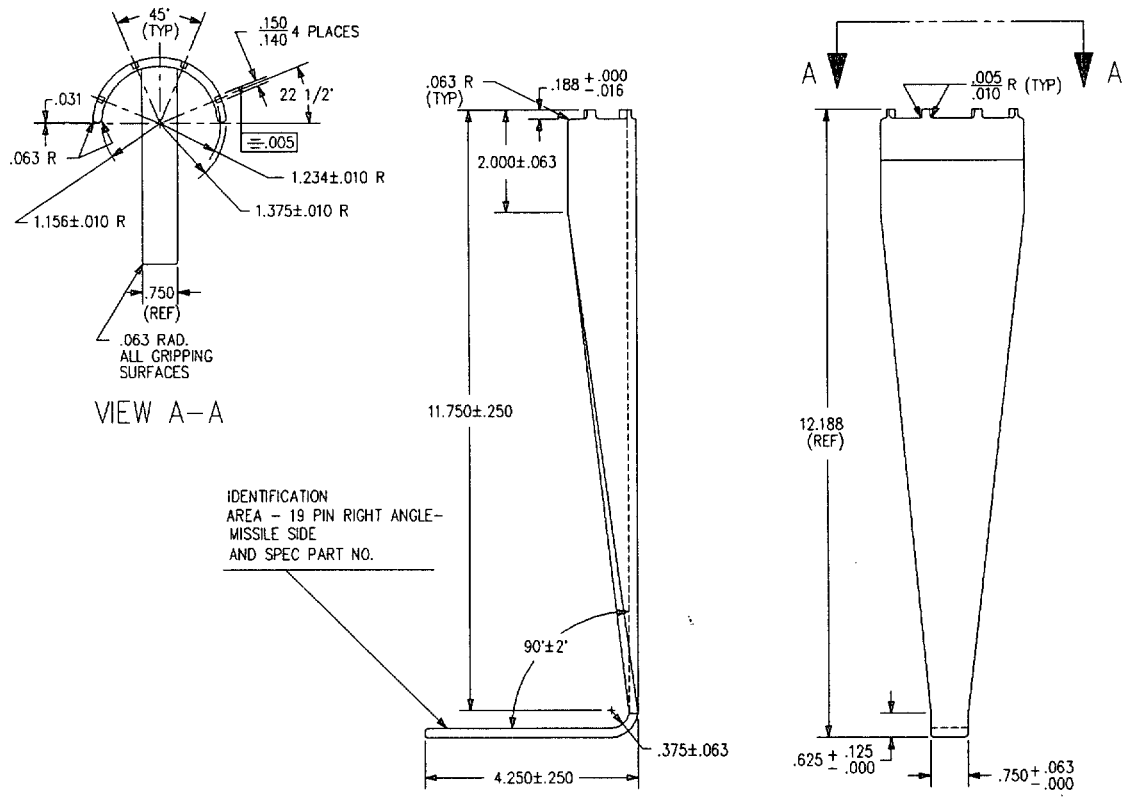

MATERIAL: STEEL QQ-W-741 (A-36)
OPTIONAL MATERIAL: STEEL ASTM A 519 (SEAMLESS TUBING)

FIGURE 4. Spanner wrench for 19-pin, angle plug, missile side M22249/45-4. 04

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:42Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list.

Item No.[1]	Description[2]	Qty[3]	Material/ Specification	Remarks
01	Wrench, spanner, 3-pin plug, missile side		M22249/45-1	
1	Body	1	Steel, ASTM A 36	
2	Handle	1	Steel, ASTM A 36	
02	Wrench, spanner, 6-pin plug, missile side		M22249/45-2	
1	Body	1	Steel, ASTM A 36	Optional material, seamless tubing, ASTM A 519
2	Drive socket	1	Steel, ASTM A 36	3/8 drive socket may be used.
3	Handle	1	Steel, ASTM A 36	
03	Wrench, spanner, 12-pin plug, missile side		M22249/45-3	
1	Body	1	Steel, ASTM A 36	
2	Handle	1	Steel, ASTM A 36	
04	Wrench, spanner 19-pin plug, right angle, missile side		M22249/45-4	
1	Body	1	Steel, ASTM A 36	Optional material, seamless tubing, ASTM A 519
05	Wrench, spanner, 6-pin plug, right angle, missile side		M22249/45-5	
1	Body	1	Steel, ASTM A 36	
2	Handle	1	Steel, ASTM A 36	

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity:
Navy - SH
(Project 5935-N278-45)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:42Z
Check the source to verify that this is the current version before use.