INCH-POUND

MS20115B
26 July 2012
SUPERSEDING
MS20115A
17 November 1972

DETAIL SPECIFICATION SHEET

SHACKLE - WIRE ROPE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-5675.

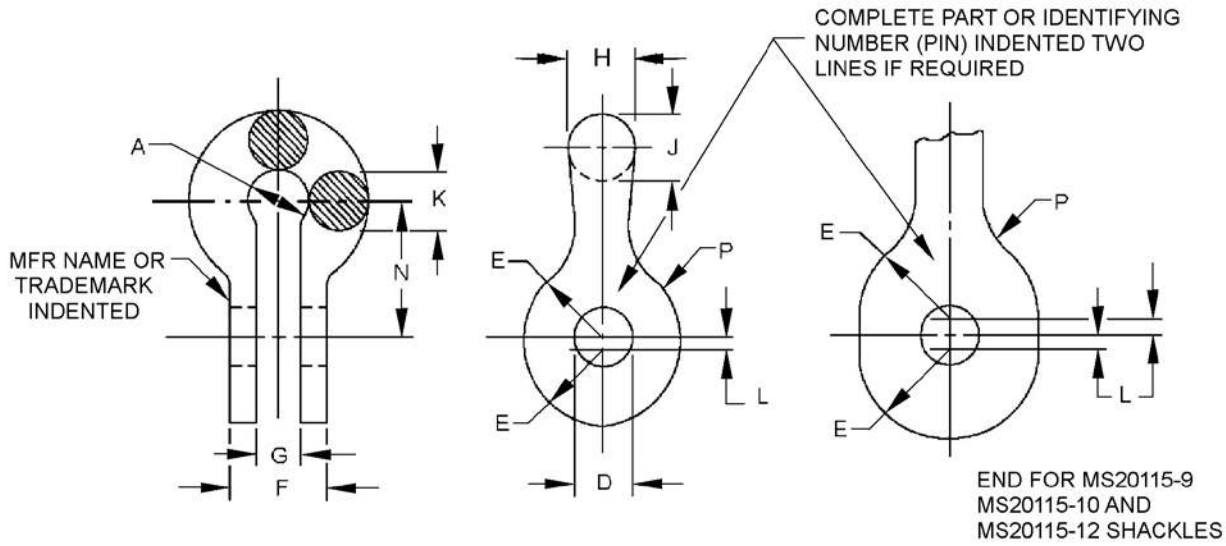


FIGURE 1. Shackle dimensions and configurations.

AMSC N/A

FSC 4030

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:22Z
Check the source to verify that this is the current version before use.

Size designator	Nominal wire rope dia. ref	Minimum breaking strength lb (kg)	A dia. +.016 (0.41) -.000 inch (mm)	D dia +.005 (0.13) -.000 inch (mm)	E rad inch (mm)	F +.010 (0.25) -.005 (0.13) inch (mm)
2	1/16	480 (218)	.188 (4.78)	.190 (4.83)	.172 (4.37)	.218 (5.54)
3	3/32	920 (417)	.219 (5.56)		.219 (5.56)	.254 (6.45)
4	1/8	2000 (907)	.250 (6.35)		.274 (6.96)	.383 (9.73)
5	5/32	2800 (1270)	.281 (7.14)	.250 (6.35)	.344 (8.74)	.406 (10.31)
6	3/16	4200 (1905)	.375 (9.53)	.313 (7.95)	.391 (9.93)	.543 (13.79)
7	7/32	5600 (2540)	.406 (10.31)		.453 (11.51)	.625 (15.88)
8	1/4	7000 (3175)	.438 (11.13)	.375 (9.53)	.484 (12.29)	.688 (17.48)
9	9/32	8000 (3629)	.500 (12.70)	.438 (11.13)	.578 (14.68	.719 (18.26)
10	5/16	9800 (4445)	.594 (15.09)		.633 (16.08)	.765 (19.43)
12	3/8	14000 (6350)	.625 (15.88)	.500 (12.70)	.750 (19.05)	.830 (21.08)

Size designator	G +.007 (0.18) -.003 (0.08) inch (mm)	H ±.016 (0.41) inch (mm)	J ±.016 (0.41) inch (mm)	K ±.016 (0.41) inch (mm)	L inch (mm)
2	.093 (2.36)	.156 (3.96)	.156 (3.96)	.156 (3.96)	.031 (0.79)
3	.108 (2.74)				
4	.195 (4.95)	.250 (6.35)	.250 (6.35)	.219 (5.56)	
5	.202 (5.13)				
6	.260 (6.60)	.312 (7.92)	.312 (7.92)	.281 (7.14)	.062 (1.58)
7	.296 (7.52)	.344 (8.74)	.344 (8.74)	.312 (7.92)	
8	.313 (7.95)	.406 (10.31)	.359 (9.12)	.359 (9.12)	
9	.327 (8.31)	.438 (11.13)	.391 (9.93)	.391 (9.93)	
10	.348 (8.84)	.469 (11.91)	.422 (10.72)	.422 (11.23)	.094 (2.39)
12	.380 (9.65)	.562 (14.27)	.500 (12.70)	.500 (12.70)	.125 (3.18)

Size designator	N ±.016 (0.41) inch (mm)	P rad. ±.016 (0.41) inch (mm)
2	.562 (14.27)	.375 (9.53)
3		
4		
5	.750 (19.05)	.438 (11.13)
6	.812 (20.62)	.500 (12.70)
7	.875 (22.23)	
8	1.000 (25.40)	.406 (10.31)
9		
10	1.125 (28.58)	.500 (12.70)
12	1.250 (31.75)	

FIGURE 1. Shackle dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:22Z
Check the source to verify that this is the current version before use.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Break sharp edges, and remove all hanging burrs and slivers.
4. Unless otherwise specified tolerances: decimals ±.010 (0.25 mm).
5. Holes to be co-axial within ±.005 (0.13 mm).

FIGURE 1. Shackle dimensions and configurations - Continued.

REQUIREMENTS:

Dimensions and configuration shall be in accordance with figure 1.

For design features purposes, this standard takes precedence over documents referenced herein.


Referenced documents shall be of the issue in effect on date of invitation for bid.

Materials and finishes shall be in accordance with MIL-DTL-5675, see table I for material code.

TABLE I. Material and code letters.

Code letter	Material
-	Corrosion resistant steel (CRES)
F	Steel
K	Nickel-copper-aluminum alloy

PIN: The PIN consists of prefix “MS” the specification sheet number, a letter or dash number for material code, and size number. Unassigned PIN’s shall not be used.

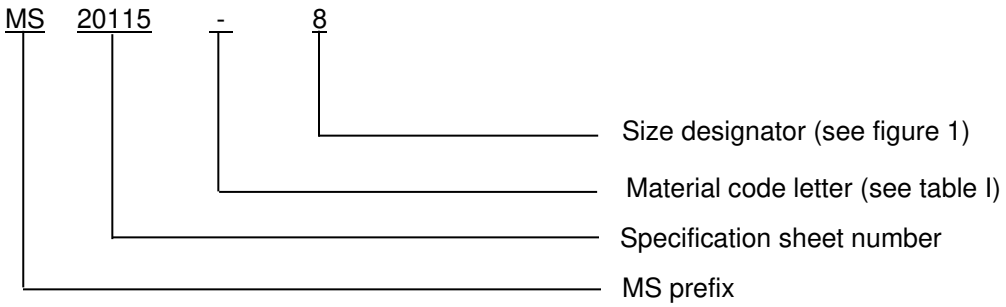

PIN example: MS20115-8 indicates a CRES shackle for 1/4 inch (6.35 mm) wire rope.

Marking: Part shall be permanently marked with the MS PIN, and include the manufacturers CAGE, name, or trademark.

Changes from previous issues. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. This document references MIL-DTL-5675.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:22Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - AV
Navy - AS
Air Force - 99
DLA - CC

Preparing activity:
DLA - CC

(Project 4030-2012-011)

Review activities:
Army - MI
Navy - MC, SA
Air Force - 71

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:22Z
Check the source to verify that this is the current version before use.