FED. SUP CLASS
5306

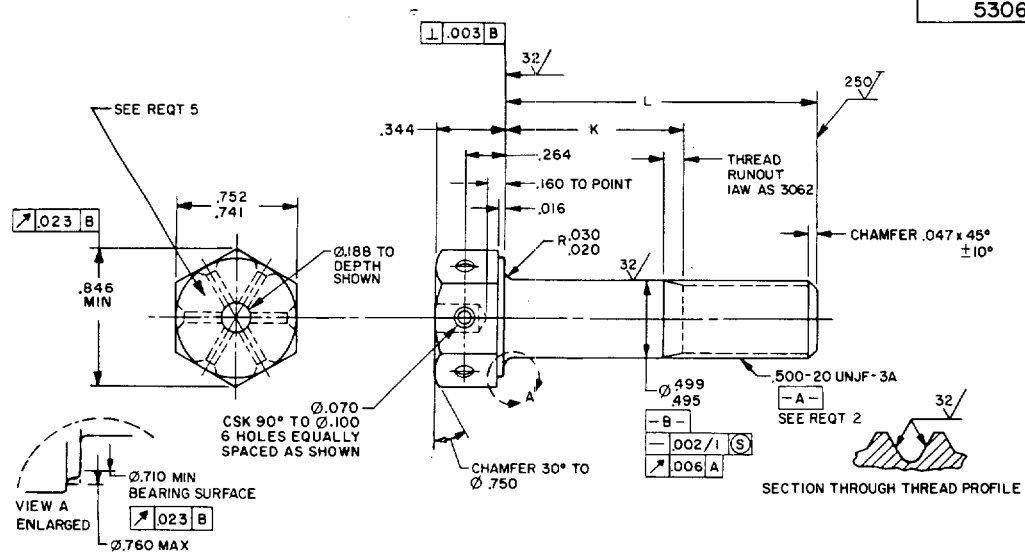


TABLE I. DASH NUMBERS AND DIMENSIONS

DASH NO	L	K	APPROX WEIGHT LB/100
-04	.812	.105-.125	9.00
-05	.875	.105-.125	9.35
-06	.938	.105-.125	9.70
-07	1.000	.105-.125	10.05
-08	1.062	.105-.125	10.42
-09	1.125	.105-.125	10.74
-10	1.188	.105-.125	11.09
-11	1.250	.105-.125	11.43
-12	1.312	.105-.125	11.78
-13	1.375	.105-.125	12.13
-14	1.438	.128-.188	12.48
-15	1.500	.190-.250	12.82
-16	1.562	.252-.312	13.16
-17	1.625	.315-.375	13.57
-18	1.688	.378-.438	13.86
-19	1.750	.440-.500	14.21
-20	1.875	.565-.625	14.90
-21	2.000	.690-.750	15.59
-22	2.125	.815-.875	16.29
-23	2.250	.940-1.000	16.98
-24	2.375	1.065-1.125	17.67
-25	2.500	1.190-1.250	18.37
-26	2.625	1.315-1.375	19.06
-27	2.750	1.440-1.500	19.75
-28	2.875	1.565-1.625	20.45
-29	3.000	1.690-1.750	21.14
-30	3.125	1.815-1.875	21.84
-31	3.250	1.940-2.000	22.53
-32	3.375	2.065-2.125	23.22
-33	3.500	2.190-2.250	23.92

DASH NO	L	K	APPROX WEIGHT LB/100
-34	3.625	2.315-2.375	24.61
-35	3.750	2.440-2.500	25.30
-36	3.875	2.565-2.625	26.00
-37	4.000	2.690-2.750	26.69
-38	4.125	2.815-2.875	27.38
-39	4.250	2.940-3.000	28.08
-40	4.375	3.065-3.125	28.78
-41	4.500	3.190-3.250	29.47
-42	4.625	3.315-3.375	30.16
-43	4.750	3.440-3.500	30.85
-44	4.875	3.565-3.625	31.54
-45	5.000	3.690-3.750	32.24
-46	5.125	3.815-3.875	32.93
-47	5.250	3.940-4.000	33.62
-48	5.375	4.065-4.125	34.32
-49	5.500	4.190-4.250	35.01
-50	5.625	4.315-4.375	35.71
-51	5.750	4.440-4.500	36.40
-52	5.875	4.565-4.625	37.09
-53	6.000	4.690-4.750	37.79
-54	1.812	.502-.562	14.55
-55	1.938	.628-.688	15.24

Ⓓ ENTIRE STANDARD REVISED

APPROVED 5 MAY 1965 REVISED Ⓓ 30 SEPT 87

USER ACTIVITIES:

REVIEWER ACTIVITIES:
AIR FORCE-82
ARMY-MI
DLA-IS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetative use shall be made from this document when applicable.

AMSC N/A

P.A. NAVY-AS Other Cust AIR FORCE-99	INTERNATIONAL INTEREST	TITLE BOLT, MACHINE-HEXAGON HEAD, DRILLED, 6 HOLES, FULL SHANK, .500-20 UNJF-3A	MILITARY STANDARD MS9588
PROCUREMENT SPECIFICATION AMS7477	SUPERSEDES:		PAGE 1 OF 2


DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5306-1183

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:20Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. MATERIAL: CORROSION AND HEAT RESISTANT STEEL IN ACCORDANCE WITH AMS 5731 (UNS S66286).
2. THREADS: THREADS IN ACCORDANCE WITH MIL-S-8879. INCOMPLETE THREADS NOT TO ENTER FILLET.
3. FLUORESCENT PENETRANT INSPECTION: FLUORESCENT PENETRANT INSPECTION SHALL BE IN ACCORDANCE WITH AMS 2645.
4. SURFACE TEXTURE: SURFACE TEXTURE IN ACCORDANCE WITH ANSI B46.1. UNLESS OTHERWISE SPECIFIED, SURFACE TO BE 125 MICROINCHES EXCEPT UPSET HEAD.
5. MARKING: MARK PART NUMBER AND MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH AS 478 CLASS A.
6. DIMENSIONING AND TOLERANCING: DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH ANSI Y14.5M.
7. TOLERANCES: UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE FOR LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°.
8. EDGES: BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
9. PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I.

EXAMPLE: MS9588-04



MS9588-04 INDICATES - BOLT, MACHINE-HEXAGON HEAD, DRILLED, 6 HOLES, FULL SHANK AMS 5731, .500-20 UNJF-3A x .812 LONG

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. DO NOT USE UNASSIGNED PART NUMBERS.
3. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
4. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.
5. THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE SAE AEROSPACE PROPULSION DIVISION.
6. AS AND AMS ARE SAE PUBLICATIONS.

APPROVED 5 MAY 1965 REVISED (D) FOR CHANGES SEE PAGES 1 AND 2

USER ACTIVITIES:

REVIEWER ACTIVITIES:
AIR FORCE – 82
ARMY – MI
DLA – IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
NAVY – AS Other Cust AIR FORCE-99		BOLT, MACHINE-HEXAGON HEAD, DRILLED, 6 HOLES, FULL SHANK, .500-20 UNJF-3A	MS9588
PROCUREMENT SPECIFICATION AMS7477	SUPERSEDES:		PAGE 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:20Z
Check the source to verify that this is the current version before use.